
CSUI Documentation

Release 1.410.18

Maslova

Feb 14, 2018

Contents

1	Overview	3
1.1	Project History	3
1.2	Implementation Details	4
1.3	Documentation	4
1.4	How to Contribute	4
2	CloudStack-UI User Guide	7
2.1	Start Working With CloudStack-UI	7
2.2	Virtual Machines	11
2.3	Storage	66
2.4	Images	80
2.5	Snapshots	92
2.6	Firewall	97
2.7	Activity log	112
2.8	SSH Keys	115
2.9	Accounts	120
2.10	Settings	137
2.11	Logout	145
3	Indices and tables	149



CloudStack-UI is a project which purpose is to provide an easy-to-use, light, and user friendly frontend interface for the Apache CloudStack virtualization management system.

Apache CloudStack is a great product which is widely used. But its frontend is developed for administrators (from our point of view), not for cloud end users. Some of the interactions are not straightforward and unnatural to an average user and require quite a long time to adapt. Other reasons to develop the UI are connected with lack of functions like virtual machine statistics & charting, sophisticated resource accounting, and application management.

That's what we are trying to add to Cloudstack-UI. The work is still in progress. But for now we have already covered lots of features that make CloudStack more good-looking and intuitive.

Project on [GitHub](#)

Join CloudStack-UI [LinkedIn Group](#)

Contents:

CloudStack-UI is a project which purpose is to provide an easy-to-use, light, and user-friendly front-end interface for the Apache CloudStack virtualization management system.

Apache CloudStack is a great product which is widely used. But its front end is developed for administrators (from our point of view), not for cloud end-users. Some of the interactions are not straightforward and unnatural to an average user and require quite a long time to adapt. Other reasons to develop the UI are connected to the lack of functions like virtual machine statistics & charting, sophisticated resource accounting, and application management.

That is what we are trying to add to Cloudstack-UI. The work is still in progress. But for now we have already covered lots of features that make CloudStack more good-looking, intuitive and convenient.

Project on [GitHub](#).

Join the [CloudStack-UI LinkedIn Group](#).

1.1 Project History

This page provides some background about the project, describes what CloudStack-UI is, and why it was developed.

At [Bitworks Software](#), we have been running an ACS public cloud for 3 years (actually we still run CS 4.3 cloud in production). And we have found that average users who are familiar with Digital Ocean, Amazon AWS, and other VPS management systems feel uncomfortable with original CloudStack UI and make a lot of operational mistakes. That is why we have decided to implement a convenient and neat end-user facing UI covering regular activities, which are important for day-to-day VM management.

There are several aims we strived to achieve with the new UI:

1. The first goal is to make the UI more intuitive in terms of usability, business processes and typical use-cases.
2. As nowadays people move further from desktop PCs and go full mobile, we wanted the UI to have a support for that. Having a full control of your cloud from a smartphone, what could be better?
3. One of the major goals we want to achieve is to build a UI that is possible to support for many years. That's why we have to use only modern technologies.

4. From the technical perspective we also want the UI to support additional meta-information like descriptions, colors, groups, helpers. All of that is not supported by the native UI and it could be used to add some additional semantics to the entities that user has: like Vms, snapshots and so on.
5. The next key point that we wanted to cover with the new UI is to have some extra features beyond the functionality that CloudStack provides, e.g. DNS management, helpdesk integration, PaaS management, runtime statistics charts and monitoring.
6. And a final goal is to have a community support that could help us to improve the product and provide better user experience for the CloudStack users.

1.2 Implementation Details

Designed compatible with Apache CloudStack 4.10 and has been tested for 4.9.

Powered by Angular and Material 2.

Tested and works fine in next modern browsers:

- Google Chrome 60.0.3112.78
- Chromium 60.0.3169.0
- Mozilla Firefox 54.0.1
- Safari 5.1.7
- Internet Explorer 11.483.150630

1.3 Documentation

The documentation for the project is presented in the *CloudStack-UI User Guide* that explains to average users how to use the UI when working with CloudStack. It also includes explanations on managers' part clarifying how to manage the cloud infrastructure via CloudStack-UI.

We hope the new features we support will be useful for both end-users and administrators.

1.4 How to Contribute

CloudStack-UI is an open-source project. It is developed by an open and friendly community. Everybody is welcome to contribute and engage with the community. We are happy to accept any contribution. You can contribute to the project development in various ways:

1. Share the information about the project with other people, try to install the UI and share your opinion with us and your colleagues.
2. Propose useful features. Ideas are always welcome.
3. Deploy it somewhere and inform us about your success story and we will share it in the adopters section.
4. Fix bugs and send us the PR.
5. Implement a feature from the Roadmap or simply make something new.
6. Support and promote the development of specific functions which are important to you and may be shared.
7. Provide testing environment for other deployment schemes. Now we interested in testing the app with

- (a) KVM with RBD
- (b) Xen with NFS, Local, RBD
- (c) Other browsers and operating systems

7. Hire us for frontend or backend development of custom software development projects. Take a look at our [website](#) to know where we can be useful. Take a look at our [presentation](#) to learn more about us.

To contribute, just contact us via e-mail: info@bw-sw.com

CloudStack-UI User Guide

Contents

- *CloudStack-UI User Guide*

CloudStack-UI is created to make it easier for end-users to use cloud infrastructure - to view and use their cloud resources, including virtual machines, templates and ISOs, data volumes and snapshots, security groups, and IP addresses.

The documentation gives precise instructions on working with the interface. The UI is quite intuitive and user-friendly, but we still advise studying the documentation first to get deeper insight of the features.

Here is the documentation structure:

2.1 Start Working With CloudStack-UI

Contents

- *Start Working With CloudStack-UI*
 - *Logging In*
 - *Resource Usage*
 - *Notifications on Pending Operations*



This page is aimed to help you to make first steps at CloudStack-UI. If you have never worked with CloudStack before, you should start with installing the CloudStack platform. Follow the instruction in [the official documentation](#).

Then deploy CloudStack-UI (see the [instructions for deployment](#)).

2.1.1 Logging In

To enter the platform use your credentials provided by an administrator:

Note: Required fields are marked with asterisks (*).

- Login * - The user ID of your account.
- Password * - The password associated with the user ID.
- Domain - Specify domain when you log in. CloudStak-UI supports three ways to do it. Choose the one which is more convenient for you:
 1. Enter a domain in the field under the “Show advanced options” button .
 2. Administrator can set a domain in configurations. Domain field will be prepopulated with the specified value. It is more convenient for a user as he/she does not need to enter the domain every time at logging in. In this case the domain field can be hidden by clicking . Find more information on the feature configuration at the [configuration guide](#).
 3. Other way to log in is to enter a URL in the format `http://<ip-address>/login?domain=<domain>`. The domain will be prepopulated in the logging in form with the value that is specified in the URL. Please, note, the domain value in URL will override the domain set in the configurations by Administrator.

Push “Login” to proceed to CloudStack. You will see the first section - Virtual Machines.

To the left you can see the main navigation bar. It allows moving from section to section. It is configured by an Administrator in the [configuration file](#) by setting a list of left-sidebar sections there. The Administrator can set it adjustable, i.e. allow a user to reorder elements in the main navigation bar (except the “Logout” section). Please, see the [configuration guide](#) for more information on configuring the navigation bar elements.

The navigation bar can be hidden or extended using the icon in the upper-left corner.

2.1.2 Resource Usage

In this section you can see the resource statistics: used and free VMs, computational resources, volumes and storage space.

Unfold *Resource Usage* panel in the upper part of the screen. It provides information on the following resources:

1. Virtual machines;
2. Computational resources - CPU, RAM;
3. Volumes and snapshots;
4. Storage - primary and secondary.

You can switch between used or free resources by clicking the option you need above the resource data list.

A user can see the resource usage statistics for his/her user only.

A Domain Administrator can view resources for his/her account and for the whole domain.

cloudstack

open source cloud computing

Username *


Administrator

Password *


.....

Domain

Administrator



LOGIN



cloudstack

open source cloud computing

Welcome,

Virtual machines

Storage

Images

Firewall

Activity log

SSH keys

Accounts

Settings

Logout

Resource usage

Used Free

Virtual machines

Number 3/20 (15%)

Computational resources

CPU 3/40 (8%)

RAM 1.5/8.0 GB (19%)

Volumes

Volumes 3/20 (15%)

Snapshots 16/60 (27%)

Storage

Primary 30/200 GB (15%)

Secondary 13/400 GB (3%)

Select zones

Select groups

Select states

Group by

Search

VM01

OS Ubuntu 14.04 (32-bit)

176.120.28.12

CPU 1x500 MHz

RAM 512.00 MB

DISKS 10.00 GB

VM03

OS Ubuntu 14.04 (32-bit)

176.120.28.15

CPU 1x500 MHz

RAM 512.00 MB

DISKS 10.00 GB

VM1

OS Ubuntu 14.04 (32-bit)

176.120.28.9

CPU 1x500 MHz

RAM 512.00 MB

DISKS 10.00 GB

cloudstack

open source cloud computing

Welcome, Develop Develop

Virtual machines

Storage

Images

Firewall

Activity log

SSH keys

Accounts

Settings

Logout

Resource usage

Account Domain Used Free

Virtual machines

Number 5/20 (25%)

Computational resources

CPU 5/40 (13%)

RAM 2.5/31.3 GB (8%)

Volumes

Volumes 10/20 (50%)

Snapshots 12/20 (60%)

Storage

Primary 75/200 GB (38%)

Secondary 40/400 GB (10%)

Select accounts

Select zones

Select groups

Select states

Group by

Search

vm-develop-20

OS Ubuntu 14.04 (32-bit)

176.120.28.9

CPU 1x500 MHz

RAM 512.00 MB

DISKS 10.00 GB

vm-develop-19

OS Ubuntu 14.04 (32-bit)

176.120.28.6

CPU 1x500 MHz

RAM 512.00 MB

DISKS 10.00 GB

vm-develop-53

OS Windows 10 (32-bit)

176.120.28.8

CPU 1x500 MHz

RAM 512.00 MB

DISKS 15.00 GB

vm-develop-22

OS Ubuntu 14.04 (32-bit)

176.120.28.7

CPU 1x500 MHz

RAM 512.00 MB

DISKS 10.00 GB

vm-user-1

OS Ubuntu 14.04 (32-bit)

176.120.28.11

CPU 1x500 MHz

RAM 512.00 MB

DISKS 18.00 GB

vm-user-4

OS Ubuntu 14.04 (32-bit)

176.120.28.10

CPU 1x500 MHz

RAM 512.00 MB

DISKS 10.00 GB

vm-develop-21

OS Apple Mac OS X 10.6 (32-bit)


176.120.28.4


CPU 1x500 MHz

RAM 512.00 MB

DISKS 10.00 GB

2.1.3 Notifications on Pending Operations

In the upper-right corner of the screen, you can see the list of pending operations by clicking a bell button . It informs you of the latest operations in the system. You can clear the list after its reviewing by deleting every notification one by one or by clicking “CLEAR ALL” at the list bottom.

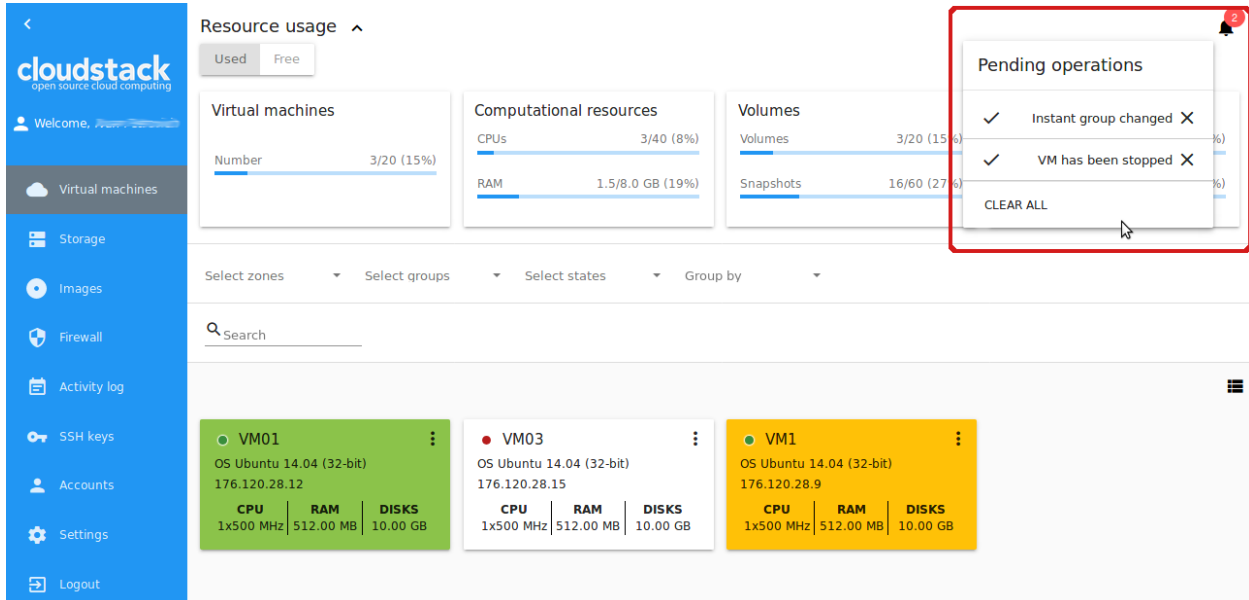

The screenshot shows the CloudStack web interface. On the left is a blue sidebar with navigation links: Welcome, Virtual machines, Storage, Images, Firewall, Activity log, SSH keys, Accounts, Settings, and Logout. The main content area is titled "Resource usage" and includes three summary cards: "Virtual machines" (3/20 at 15%), "Computational resources" (CPUs 3/40 at 8%, RAM 1.5/8.0 GB at 19%), and "Volumes" (3/20 at 15%, Snapshots 16/60 at 27%). Below these are filters for zones, groups, states, and grouping. A search bar is present. At the bottom, three virtual machine cards are displayed: VM01 (green), VM03 (red), and VM1 (yellow), each showing OS, IP, CPU, RAM, and DISKS. In the top right corner, a "Pending operations" notification box is open, listing two events: "Instant group changed" and "VM has been stopped", each with a checkmark and a close button (X). A "CLEAR ALL" button is at the bottom of the notification box. A red rectangle highlights the notification box.

2.2 Virtual Machines

Contents


- *Virtual Machines*
 - *Virtual Machines List*
 - * *Filtering of Virtual Machines*
 - *Create a Virtual Machine*
 - * *Possible Issues When Creating a Virtual Machine*
 - *VM Action Box*
 - *VM Details Sidebar*
 - * *Virtual Machine Tab*
 - * *Storage Tab*
 - *Volume Action Box*
 - *Snapshot Action Box*
 - * *Network Tab*
 - * *Tags Tab*

– *Access a Virtual Machine*

Virtual Machines is the starting section. Here and in all other views we implemented the “one-step” approach, and we also made it work without moving from view to view. So all actions on VMs can be managed from one screen view.



2.2.1 Virtual Machines List

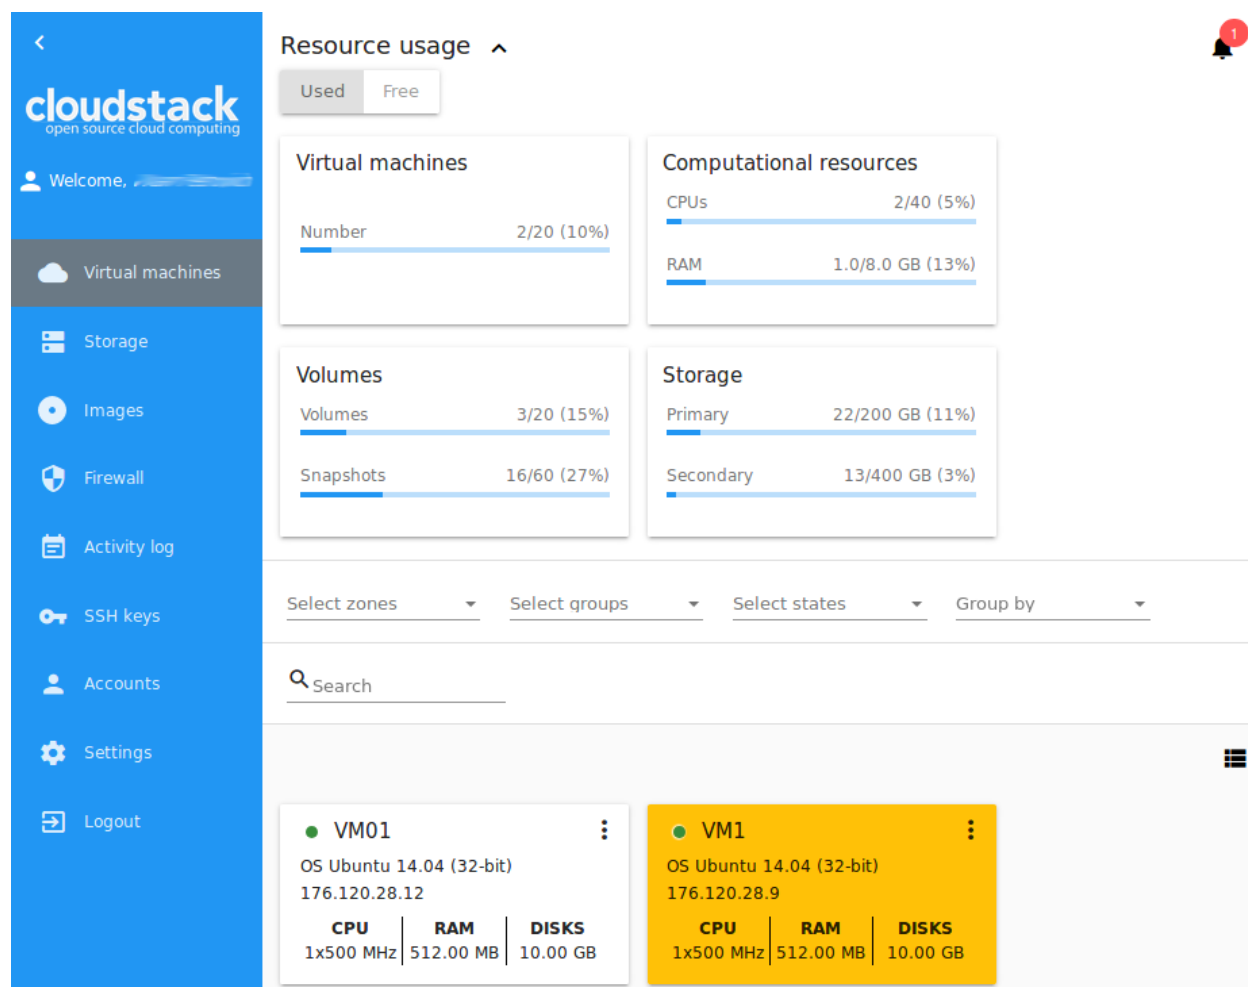At this page, you can see the list of your virtual machines available to your user only.



If you are a Domain Administrator you can see the virtual machines of all users in your account. Or select all accounts in the “Select accounts” option above the list to see the virtual machines for the whole domain.

You can change the data representation of existing virtual machines from “card” to “list”. We have added the switch

 /  in the upper-right corner of each section. This improvement gives a user an opportunity to work with data in each specific section in a more convenient way.

A list view can be switched to a box view:

And vice versa, switch a list view to a box view:

For each VM in the list view you can see the following information:

- VM name and IP;

cloudstack

open source cloud computing

Welcome, [Developer Console](#)

Virtual machines

Storage

Images

Firewall

Activity log

SSH keys

Accounts

Settings

Logout

Resource usage

Account Domain Used Free

Virtual machines

Number 8/20 (40%)

Computational resources

CPU 8/40 (20%)

RAM 5.0/31.3 GB (16%)

Volumes

Volumes 12/20 (60%)

Snapshots 10/20 (50%)

Storage

Primary 143/200 GB (72%)

Secondary 77/400 GB (19%)

develop

user1

newAccount

AdminAccount

user

user123

Select zones

Select groups

Select states

Group by

vm-develop-260

OS Ubuntu 16.04 (64-bit)

176.120.28.4

CPU 1x1000 MHz

RAM 1.00 GB

DISKS 16.00 GB

vm-develop-276

OS Ubuntu 14.04 (32-bit)

176.120.28.15

CPU 1x500 MHz

RAM 512.00 MB

DISKS 10.00 GB

vm-develop-277

OS Ubuntu 14.04 (32-bit)

176.120.28.8

CPU 1x500 MHz

RAM 512.00 MB

DISKS 10.00 GB

vm-develop-278

OS Ubuntu 14.04 (32-bit)

176.120.28.14

CPU 1x500 MHz

RAM 512.00 MB

DISKS 10.00 GB

vm-develop-287

OS Ubuntu 16.04 (64-bit)

176.120.28.7

CPU 1x500 MHz

RAM 512.00 MB

DISKS 22.00 GB

vm-user123-2

OS Ubuntu 14.04 (32-bit)

176.120.28.10

CPU 1x1000 MHz

RAM 1.00 GB

DISKS 10.00 GB

VM2

OS Apple Mac OS X 10.6 (32-bit)

176.120.28.16

CPU 1x500 MHz

RAM 512.00 MB

DISKS 8.00 GB

Zolotyx

OS Ubuntu 10.04 (64-bit)

176.120.28.13

CPU 1x500 MHz

RAM 512.00 MB

DISKS 10.00 GB

VM1	176.120.28.7	CPU: 1x500 MHz	RAM: 512.00 MB	DISKS: 10.00 GB	OS Ubuntu 14.04 (32-bit)
VM2	176.120.28.8	CPU: 1x1000 MHz	RAM: 1.00 GB	DISKS: 10.00 GB	OS Ubuntu 14.04 (32-bit)
VM3	176.120.28.9	CPU: 1x500 MHz	RAM: 512.00 MB	DISKS: 92.00 GB	OS Ubuntu 16.04 (64-bit)

VM1

OS Ubuntu 14.04 (32-bit)

176.120.28.7

CPU 1x500 MHz

RAM 512.00 MB

DISKS 10.00 GB

VM2

OS Ubuntu 14.04 (32-bit)

176.120.28.8

CPU 1x1000 MHz

RAM 1.00 GB

DISKS 10.00 GB

VM3

OS Ubuntu 16.04 (64-bit)


176.120.28.9

CPU 1x500 MHz

RAM 512.00 MB


DISKS 92.00 GB

- State - shows the VM state by color spot: green for Running, red for Stopped, yellow for changing status;
- OS family;
- CPU;
- RAM;
- Disks.

To the right the Actions button  expands the list of actions available for the VM.

Filtering of Virtual Machines

The filtering and search tool will help you to find a virtual machine in the list.

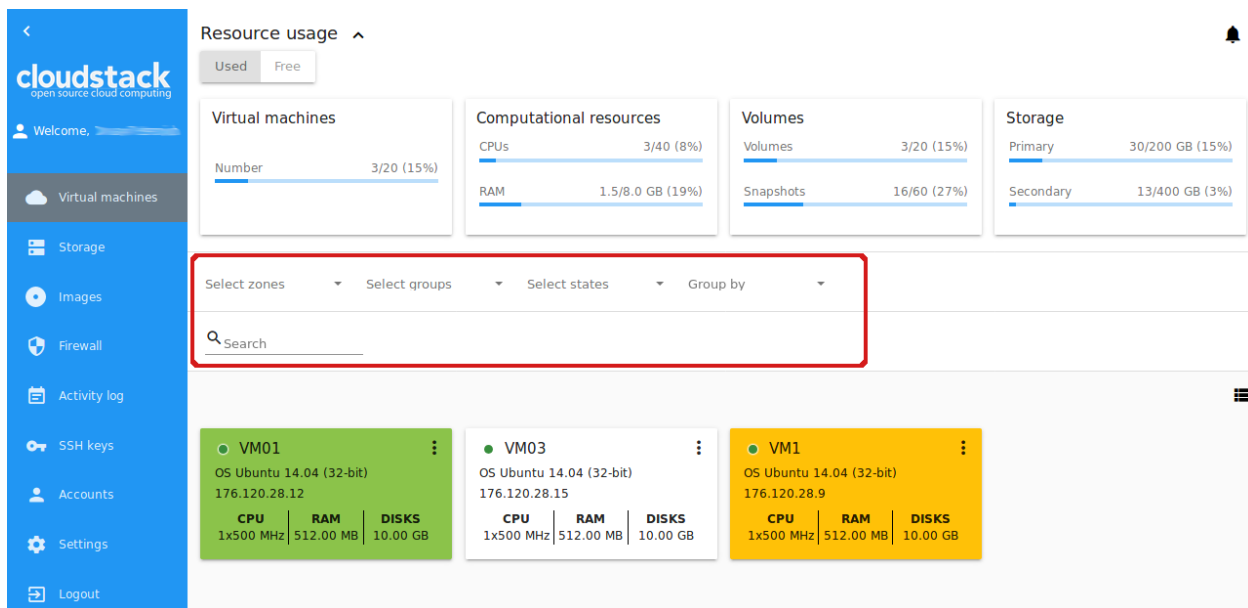

You can filter the VM list by accounts (available for Domain Administrators) and/or zones and/or groups and/or states. In the drop-down lists tick the filtering parameters and see the immediate result.

Besides, VMs can be grouped by zones and/or groups and/or colors and/or accounts. Grouping makes it easier to identify necessary VMs on the list.

Use the search tool to find a virtual machine by its name or a part of the name.

Under the Virtual Machines section, you can open a form to create a new virtual machine.

2.2.2 Create a Virtual Machine


Creating a new VM in CloudStack-UI is a one-step action. You can select options from one screen without additional steps.

To create a new VM click the “Create” button at the bottom-right corner.

In the *Create VM* form fill in the following fields:

1. **Name *** - A name of VM. The system suggests a meaningful autogenerated name in the following form `vm-<username>-<counter>`. You can enter any name you wish. It should start with a letter, contain figures and Latin letters (up to 63 symbols) and be unique within the domain.

Resource usage ^

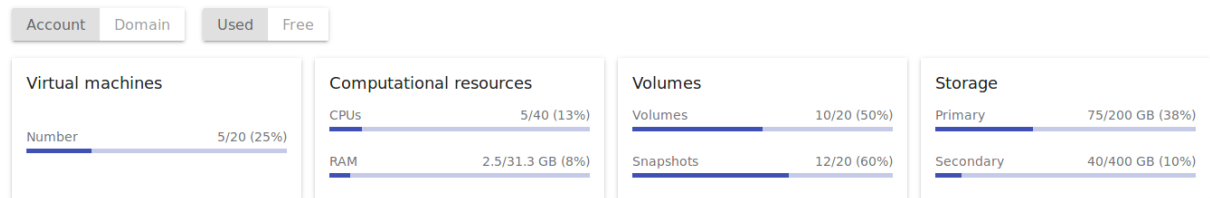

Select accounts ▼ Select zones Toms ▼ Select groups Group 1 ▼ Select states ▼ Group by ▼

Search

vm-user-1

OS Ubuntu 14.04 (32-bit)

176.120.28.11

CPU	RAM	DISKS
1x500 MHz	512.00 MB	18.00 GB

Resource usage ^

Account Domain Used Free

Virtual machines

Number 1/20 (5%)

Computational resources

CPU 10/63

RAM 49/400 GB (12%)

Volumes

20/200 GB (10%)

Storage

49/400 GB (12%)

Select zones ▼ Select groups ▼

Search

vm-user-13

OS Apple Mac OS X 10.6 (64-bit)

176.120.28.7

CPU	RAM	DISKS
2x1000 MHz	1.00 GB	20.00 GB

New virtual machine

Name vm-user-15 10 / 63

Zone Toms ▼

Service offering SELECT

Service offering: Custom - 12x1032 MHz, 512 MB

Installation source SELECT

OS template: df

Group No group

Affinity group No group 0 / 63

Firewall rules EDIT

Based on ICMP Permit All, TCP Per...

Keyboard layout Standard (US) keyboard ▼

SSH keypair No SSH key ▼

☒ Start VM

CANCEL CREATE

2. **Zone *** - A zone of VM operation. Select a zone from the drop-down list. The list of available zones is managed by a Root Administrator. More information about zones in CloudStack can be found in the [official documentation](#).
3. **Service offerings *** - Select a set of options and resources for a VM, such as templates for creating virtual machines, disk storage, and other. The list of available service offerings is managed by an Administrator. Service offering availability is determined by zone in the [configuration file](#).

Click “SELECT” in the Service Offerings block and choose a necessary option in the modal window. The list of service offerings can be of two types: Fixed and Custom. *Fixed* service offerings are the offerings with fixed parameters. They can not be changed. *Custom* service offerings are offerings with adjustable parameters. You can set the amount of CPU cores, CPU memory and Network rate as you need. Use the switcher “Fixed/Custom” above the list to select a necessary type of offerings. Use the search tool to find an option in the list by a name or a part of the name.

For fixed service offerings the parameters are provided in the table per each option. Four main parameters are provided by default. They are:

- CPU Cores;
- CPU (MHz);
- Memory (MB);
- Network Rate (Mb/s).

Click “SHOW ADDITIONAL FIELDS” to the right to expand the range of parameters. Scroll the table to right and you will see:

- Disk read rate (Mb/s);
- Disk write rate (Mb/s);
- Disk read rate (IO/s);
- Disk write rate (IO/s).

You can hide the additional parameters by clicking “HIDE ADDITIONAL FIELDS”.

Choose the option in the list and click “SELECT” below.

The settings will appear for the VM service offerings.

For custom service offerings the parameters are also provided in the table per each option. Besides, you can see more parameters by clicking “SHOW ADDITIONAL FIELDS”.

By selecting an option in the list, you open a modal window where you can set a value for the following parameters:


- CPU Cores;
- CPU (MHz);
- Memory (MB).


These parameters can be predefined in the [configuration file](#) by an Administrator. The values specified there will be used as default parameters for a custom service offering.


Administrators can set limits for custom service offerings in the [configuration file](#). That means you cannot set values large than the limits specified for custom service offerings.

Click “CONFIRM” to set the custom service offering parameters. The modal window will close and the set values will appear in the list for the selected custom service offerings. Click “CANCEL” to drop all the settings.

Click “SELECT” below the list to assign the service offerings to your machine. The custom settings will appear for the VM service offerings. Custom service offering parameters are saved to account tags (see the [list of tags](#)) if they are supported for the account. This will make it easier for you to use saved custom parameters for service offerings

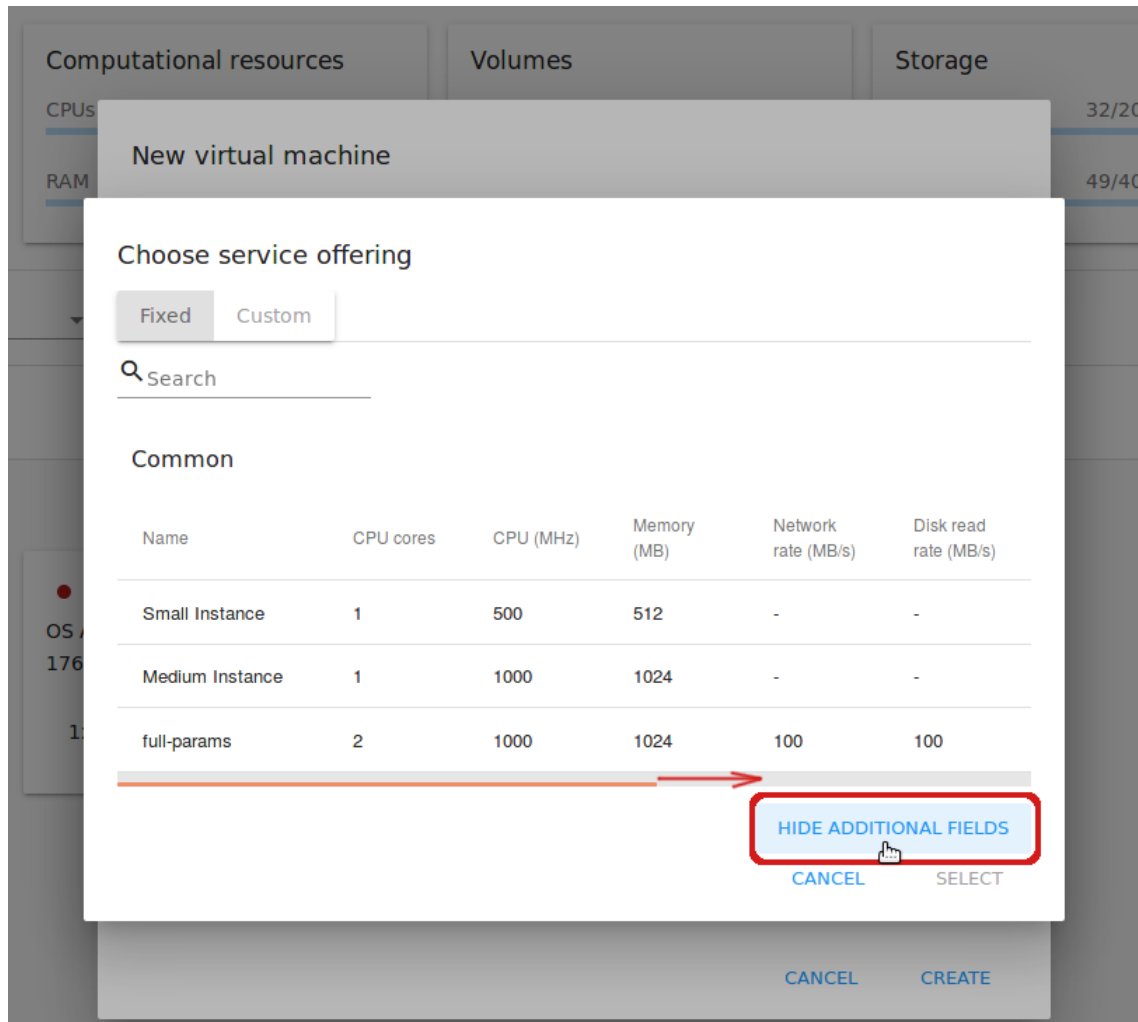

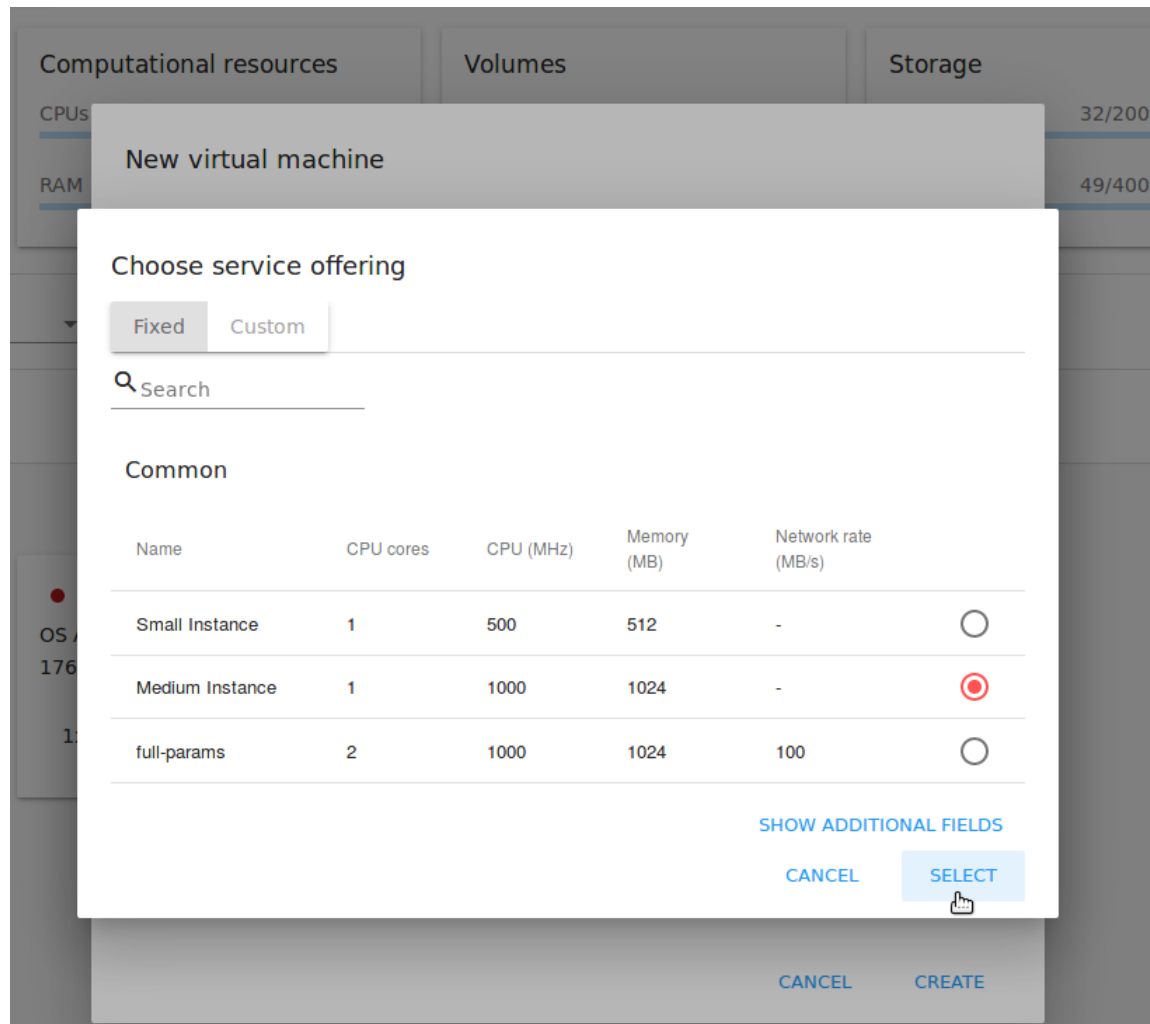

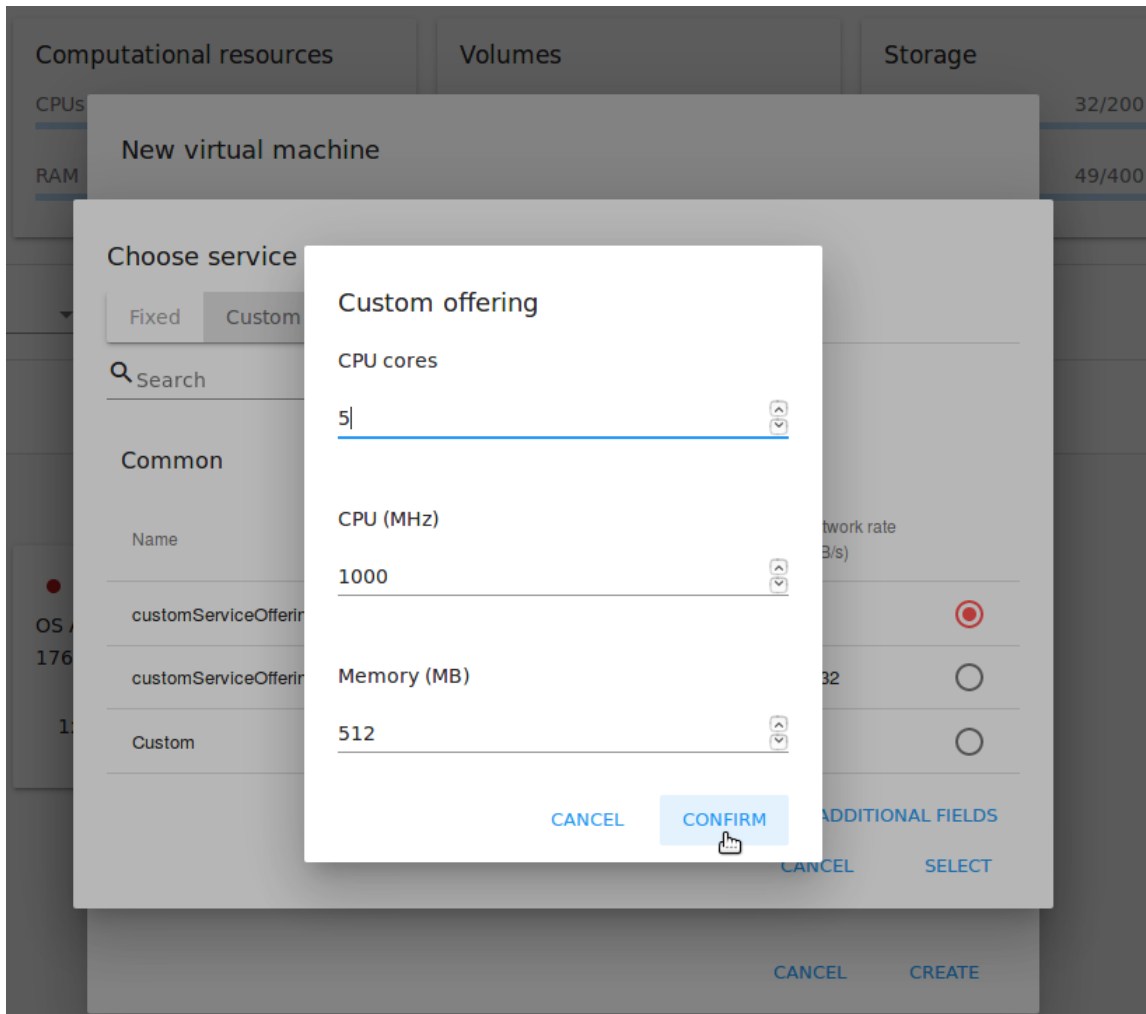

next time at VM creation as they will be predefined in the form automatically. Account tags can be switched on in the [configuration file](#) by an Administrator.

You can change service offerings by clicking “SELECT” next to the settings in the creation form and choosing other parameters. Click “CHANGE” below to assign the selected option to the VM.

4. **Installation source** * - Click “Select” to choose an installation source. Traditionally, there are two options of the virtual machine creation:

- From a Template.
- From an ISO file.


You will see a list in a modal window that contains templates/ISOs with the “Ready” status available for the selected zone, as well as user’s account or the whole domain.

The filtering tool allows finding a necessary option by selecting among templates/ISOs by OS families, types and groups, or search the source by a name or a part of its name.

Tick the source in the list and click “SELECT” to implement the selected source.

Click “CANCEL” to drop selected options. No source will be selected then.

5. **Disk offering** - Available if ISO is selected as a source. Open a modal window where available disk offerings are listed by clicking “SELECT” in the disk offering section. The list of available options is managed by an

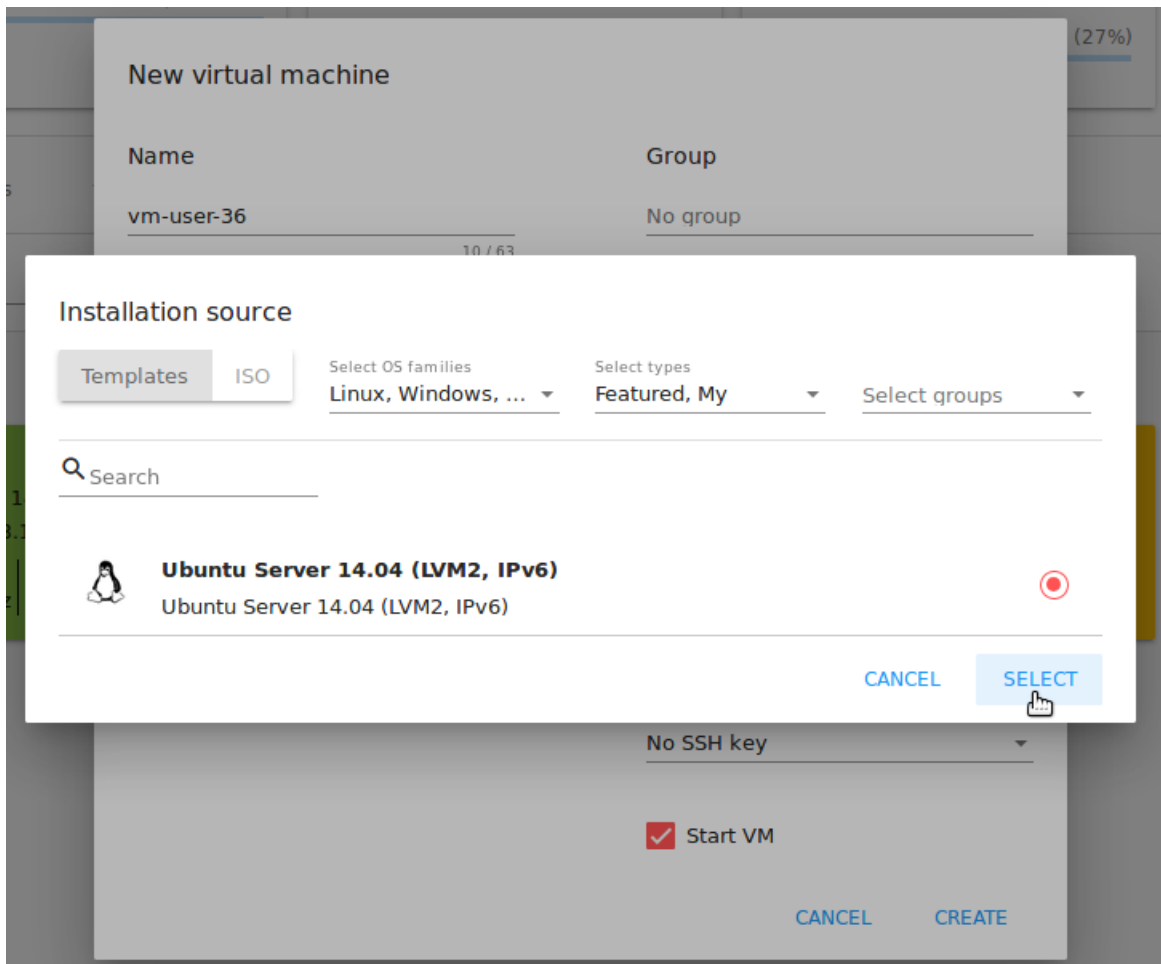


Administrator. Disk offering availability is determined by zone in the [configuration file](#).

For each disk offering you will see a range of parameters. The following parameters are shown by default:

- Read rate (MB/s);
- Write rate (MB/s);
- Read rate (IO/s);
- Write rate (IO/s).

More parameters can be added via the [configuration file](#) by an Administrator.

Select a disk offering in the list and click “SELECT”.

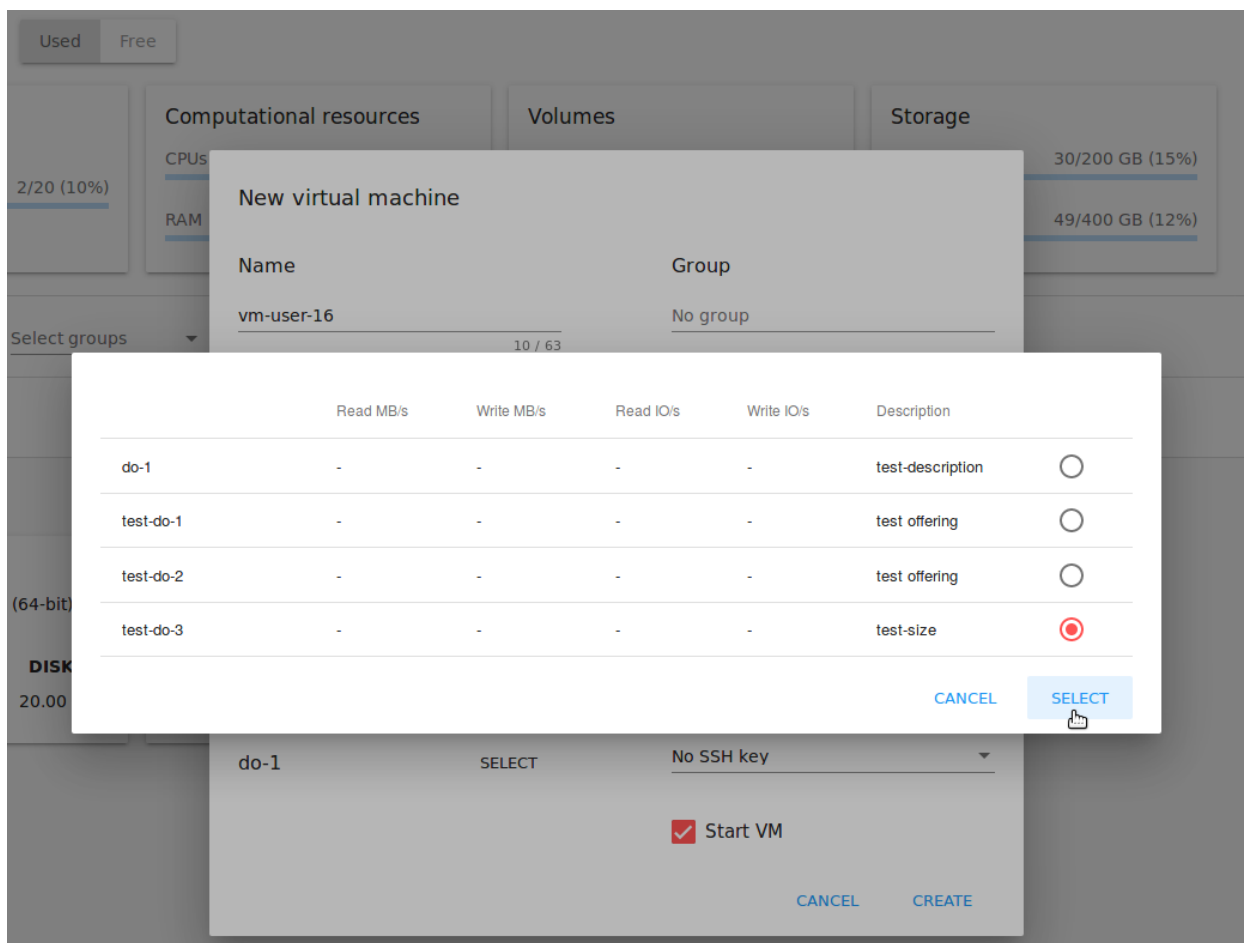

If the selected disk offering has a custom disk size (it is set by Administrator), you can change the disk size. Change the disk size moving the slider up to the volume size you wish.

Find more about disk offerings in the [official documentation](#).

6. **Group** - Select a group from the drop-down list. Or create a new group by typing its name right in the field. The group will be saved to the machine [tags](#).
7. **Affinity group** - Select an affinity group from the drop-down list. Or create a new group entering it right in this field. The name should contain letters, figures, start from a letter and should not contain spaces. Its length should not exceed 63 symbols. What is an affinity group you can read in the [official documentation](#).

New virtual machine

Name vm-user-16 10 / 63	Group No group
Zone Tomsk	Affinity group No group 0 / 63
Service offering SELECT Service offering: Small Instance	Firewall rules EDIT Based on ICMP Permit All, TCP Per...
Installation source SELECT OS template: DrWeb LiveCD 201...	Keyboard layout Standard (US) keyboard
Disk offering test-do-3 SELECT	SSH keypair No SSH key
Disk size 30 GB 24	<input checked="" type="checkbox"/> Start VM


CANCEL CREATE

8. **Firewall rules** - Click “Edit” to specify a security group for the VM. In the appeared window choose between “Create new” or “Select Shared” options.

Create new security group

A new security group is created on the base of predefined templates. This security group will be created as a *private* group used for this VM only.

When creating a new security group, you can see all the templates are selected by default in the modal window. To form your custom security group, select a template in the “All templates” list at the left and move it to the “Selected templates” list at the right by clicking the arrow icon:

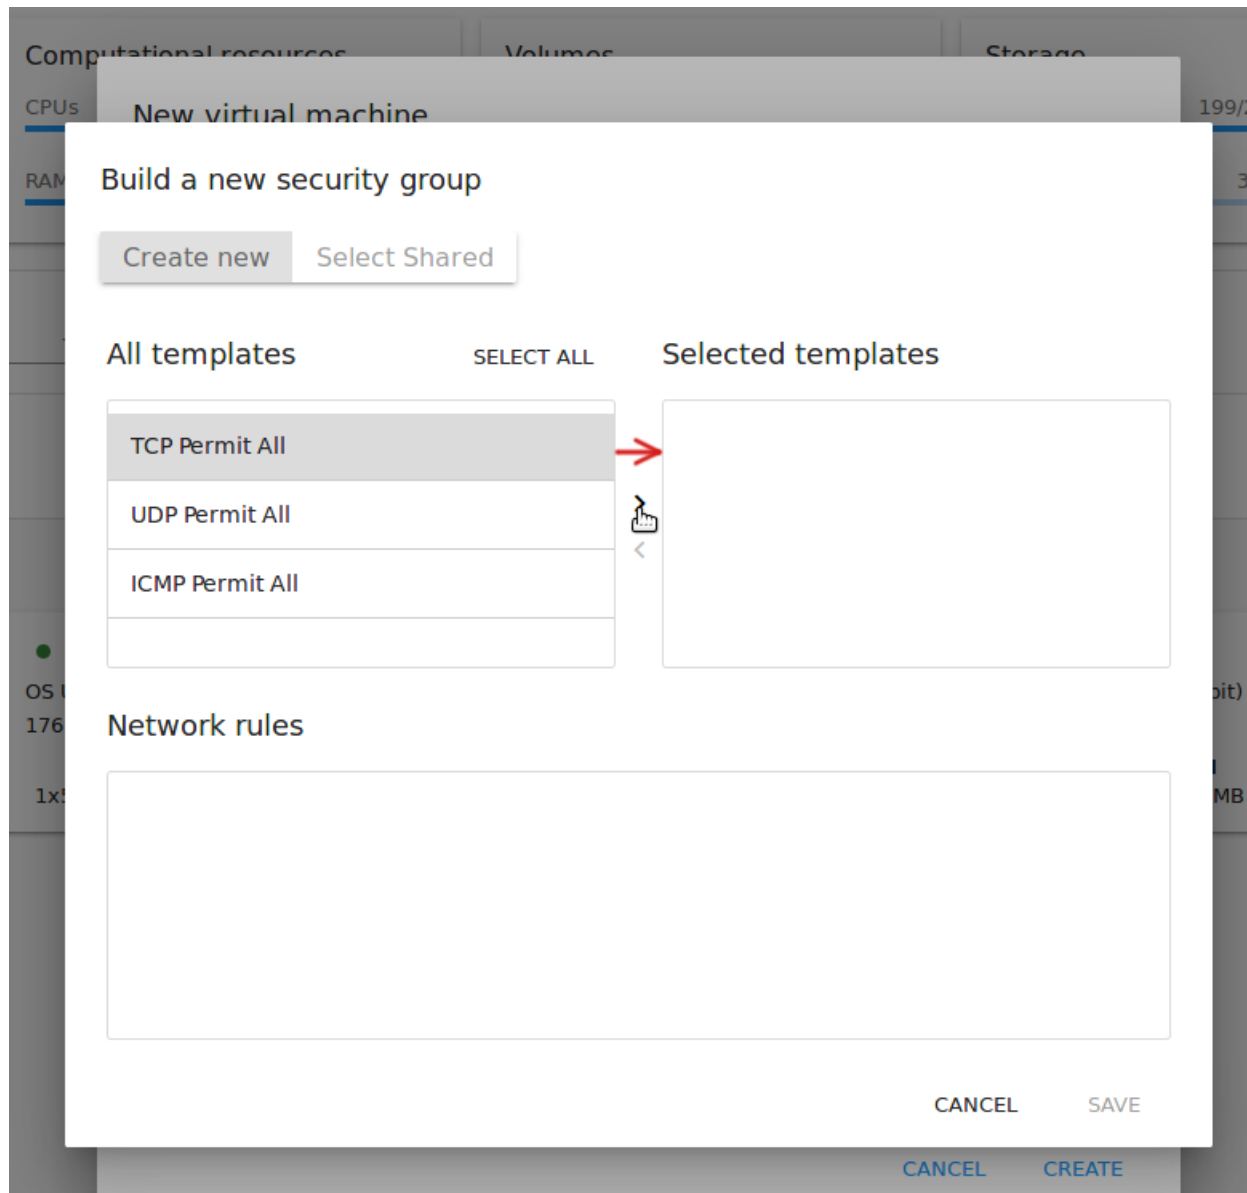

Click “Select All” to move all templates from left to right at once.

Click “Reset” to drop all selected templates.


In the list below you will see the rules corresponding to the selected templates. All of them are checked as selected. Uncheck those you do not wish to add to your VM as firewall rules.

Click “Save” to apply the selected rules to your virtual machine.

Click “Cancel” to drop the selected options. No rules will be assigned to the virtual machine. You will return to the “Create new virtual machine” window.

Select Shared security group

If you would like to select an existing group of firewall rules, you can click the “Select Shared” option and tick those groups in the list that you want to assign to your VM. The security groups in the *Shared* list are used by other VMs in the domain. That means you won’t be able to uncheck some rules in the group that you do not want to include into the list (like at creating VM from a template). You can assign only the whole shared security group to your VM.

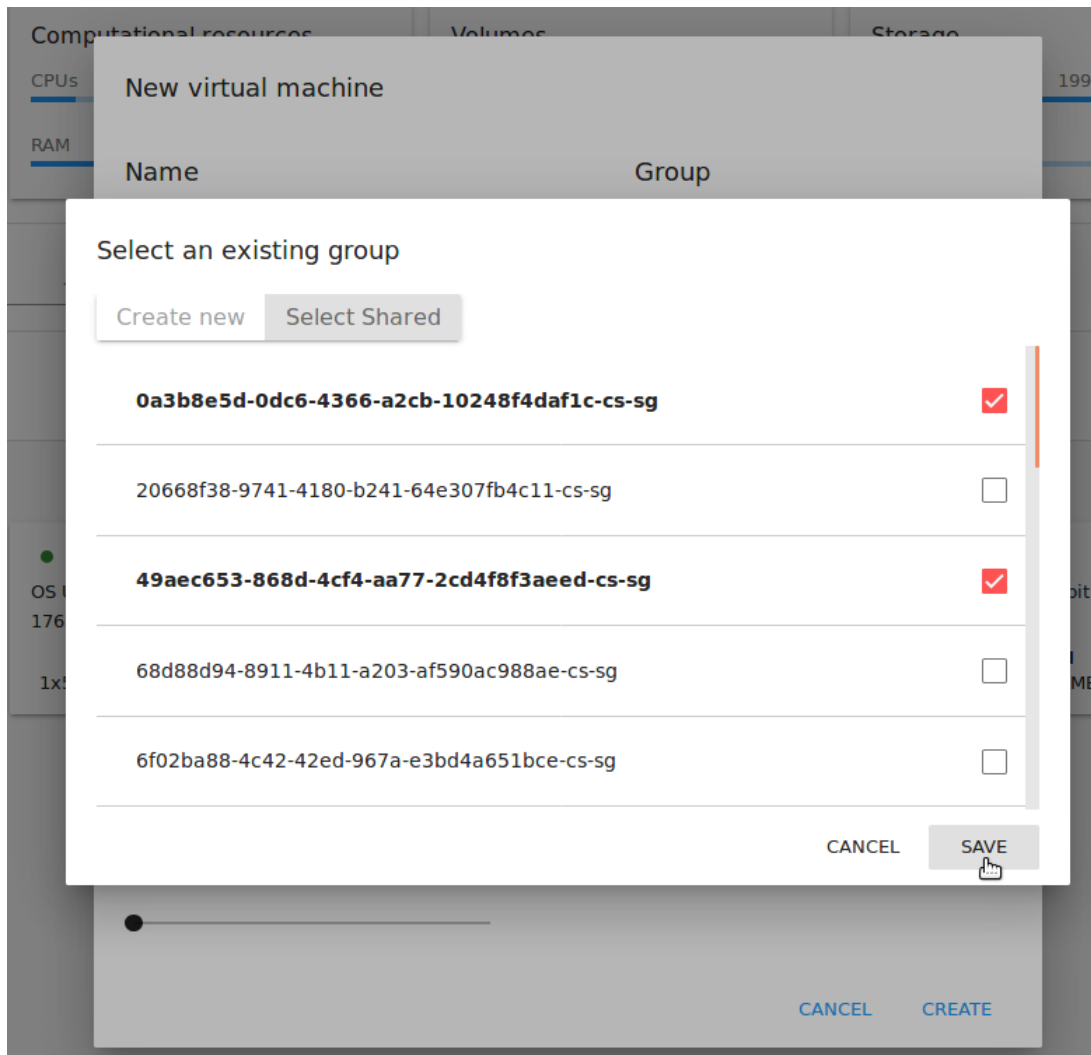

You can edit a shared security group after VM is created. In the *Network* tab of the VM details sidebar the assigned shared security group(s) can be viewed and edited. Please, find more information on security group editing in the [Network Tab](#) section.

Click “Cancel” to drop the selected options. No rules will be assigned to the virtual machine.

9. **Keyboard layout** - (is prepopulated). Select a keyboard layout from the drop-down list.
10. **SSH keypair** - Select an SSH keypair. The list of keys contains the SSH keys available for the account under which the VM is being created. Find more information on SSH keys in the [SSH Keys](#) section.

11. **Start VM** - Tick the box to start the VM right after its deployment. If this option is activated, the VM acquires an IP and a password (if required by the template). If it is not, the machine IP is not available till VM is started, no password is assigned to it.

Note: Required fields are marked with an asterisk (*).

Once all fields are filled in, click “Create”.

For some templates/ISO used at VM creation you are offered to accept the “Template/ISO Terms and Conditions Agreement”. An administrator is able to specify an agreement for a template or ISO. An agreement may determine, for example, software licensing terms or restrictions on the liability of the software template vendor. A user must confirm it to continue VM installation from a chosen source.

If you are creating a virtual machine on the base of a template/ISO that requires an agreement, read the terms in the appeared window and click “Agree” to continue.

License

1. Overview

a. Applicability. This agreement applies to the Windows software that is preinstalled on your device, or acquired from a retailer and installed by you, the media on which you received the software (if any), any fonts, icons, images or sound files included with the software, and also any Microsoft updates, upgrades, supplements or services for the software, unless other terms come with them. It also applies to Windows apps developed by Microsoft that provide functionality such as mail, contacts, music and photos that are included with and are a part of Windows. If this agreement contains terms regarding a feature or service not available on your device, then those terms do not apply.

b. Additional terms. Additional Microsoft and third party terms may apply to your use of certain features, services and apps, depending on your device's capabilities, how it is configured, and how you use it. Please be sure to read them.

(i) Some Windows apps provide an access point to, or rely on, online services, and the use of those services is sometimes governed by separate terms and privacy policies, such as the Microsoft Services Agreement at (aka.ms/msa). You can view these terms and policies by looking at the service terms of use or the app's settings, as applicable. The services may not be available in all regions.

(ii) Microsoft, the manufacturer or installer may include additional apps, which will be subject to separate license terms and privacy policies.

(iii) The software includes Adobe Flash Player that is licensed under terms from Adobe Systems Incorporated at (aka.ms/adobe/flash). Adobe and Flash are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries.

(iv) The software may include third party programs that are licensed to you under this agreement, or under their own terms. License terms, notices and acknowledgments, if any, for the third party programs can be viewed at (aka.ms/thirdpartynotices).

(v) To the extent included with Windows, Word, Excel, PowerPoint and OneDrive are licensed for your personal, non-commercial use, unless you have commercial use rights under a separate agreement.

2. Installation and Use Rights

a. License. The software is licensed, not sold. Under this agreement, we grant you the right to install and run one instance of the software on your device (the licensed device), for use by one person at a time, so long as you comply with all the terms of this agreement. Updating or upgrading from non-genuine software with software from Microsoft or authorized sources does not make your original version or the updated/updated version genuine, and in that situation, you do not have a license to use the software.

b. Device. In this agreement, "device" means a hardware system (whether physical or virtual) with an internal storage device capable of running the software. A hardware partition or blade is considered to be a device.

c. Restrictions. The manufacturer or installer and Microsoft reserve all rights (such as rights under intellectual property laws) not expressly granted in this agreement. For example, this license does not give you any right to, and you may not:

(i) use or virtualize features of the software separately;

(ii) publish, copy (other than the permitted backup copy), rent, lease, or lend the software;

(iii) transfer the software (except as permitted by this agreement);

(iv) work around any technical restrictions or limitations in the software;

(v) use the software as server software, for commercial hosting, make the software available for simultaneous use by multiple users over a network, install the software on a server and allow users to access it remotely, or install the software on a device for use only by remote users;

(vi) reverse engineer, decompile, or disassemble the software, or attempt to do so, except and only to the extent that the foregoing restriction is (a) permitted by applicable law; (b) permitted by licensing terms governing the use of open-source components that may be included with the software; or (c) required to debug changes to any libraries licensed under the GNU Lesser General Public License which are included with and linked to by the software; and

(vii) when using Internet-based features you may not use those features in any way that could interfere with anyone else's use of them, or try to gain access to or use any service, data, account, or network, in an unauthorized manner.

CANCEL AGREE


Click “Cancel” to close the terms and move back to the creation form. Change the installation source.

After clicking “Create”, a dialogue window will appear where you can monitor the VM creation process: security group creation, virtual machine deployment, template tags copying, etc. These procedures are fulfilled one by one. A procedure in progress is marked with a spinner in the message. In case of an error occurring at any VM creation step, a user can understand at what step it has happened.

Once the VM creation process finishes, the success message will inform you of that.

The message will show the list of all creation steps and the virtual machine information:

- VM name and IP (if it is available),
- VM Password - This field appears after the VM creation, if a password is enabled for the template used for creating this machine. A password is autogenerated. Click “Save” next to it in the dialogue window if you want to save it for this VM. The password will be saved to the VM tags. You can see the saved password later by clicking “Access VM” in the Actions box for this machine.

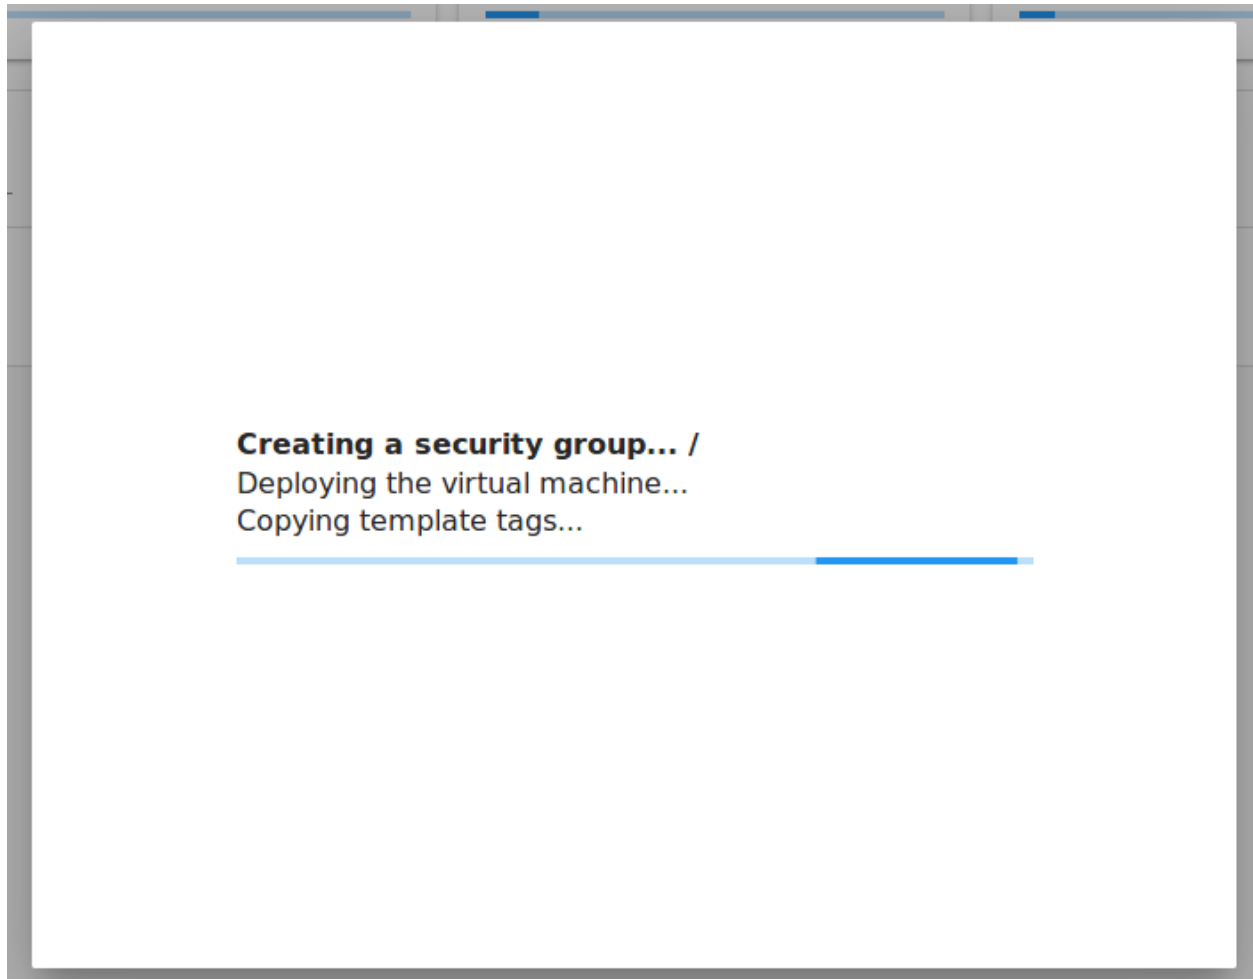

Resource usage ^

Used Free

Virtual machines	Computational resources	Volumes	Storage
Number 3/20 (15%)	CPU 3/40 (8%) RAM 1.5/8.0 GB (19%)	Volumes 5/20 (25%) Snapshots 7/60 (12%)	Primary 42/200 GB (21%) Secondary 31/400 GB (8%)

Select zones Select groups

Search

vm-user-14 OS Ubuntu 14.04 (32-bit) 176.120.28.7 CPU 1x500 MHz RAM 512.00 MB DISKS 10.00 GB


vm-user-17 OS Ubuntu 14.04 (32-bit) 176.120.28.10 CPU 1x500 MHz RAM 512.00 MB DISKS 10.00 GB

Creating a security group... OK
Deploying the virtual machine... OK
Copying template tags... OK
Deployment finished

Virtual Machine Successfully Created

Virtual machine name: vm-user-17
Password: QgF4Eg ✓
IP: 176.120.28.10

[OPEN VNC CONSOLE](#) [CLOSE](#)

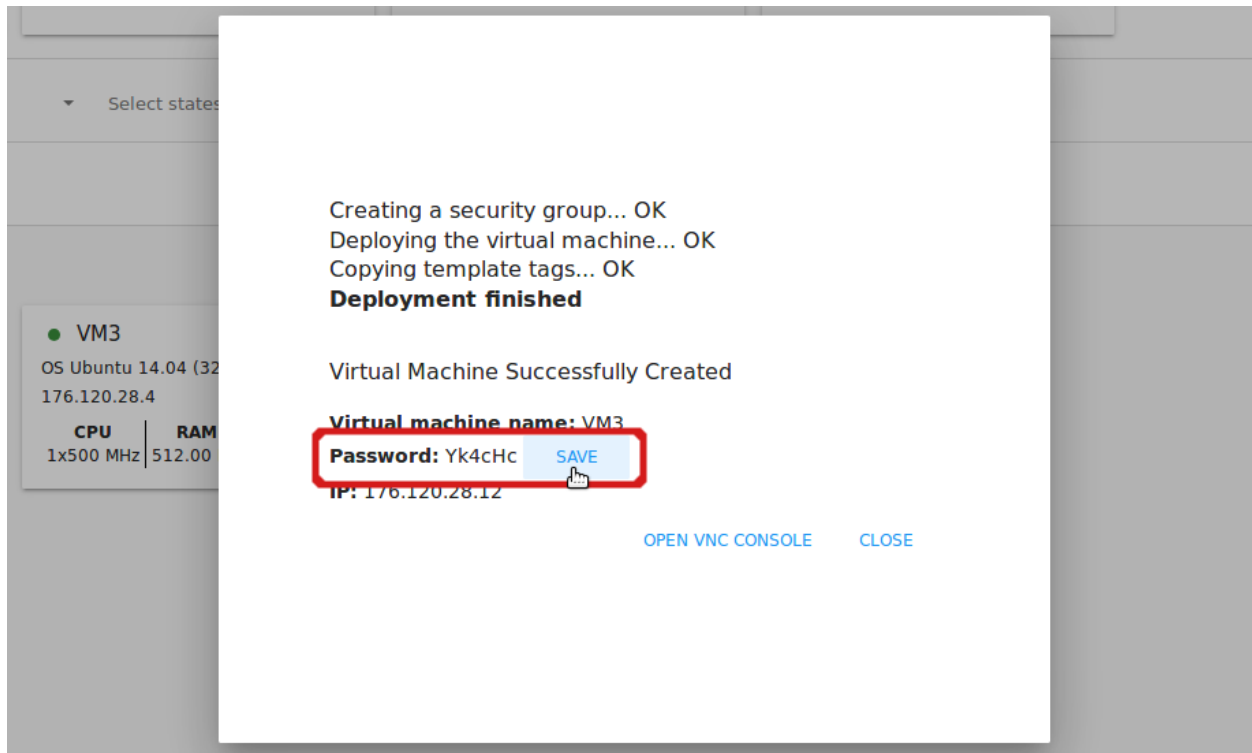

The system will ask you if you wish to save passwords to VM tags by default for the virtual machines created in the future. Click “Yes” and the “Save VM password by default” option will be activated in the account settings:

It means the password will be saved to tags automatically for all created virtual machines.

From this window, you can access the VM opening VNC console.

Close the dialogue window and make sure the newly created VM is in the list of virtual machines.

Click “Cancel” to drop the VM creation.

Possible Issues When Creating a Virtual Machine

You can face the following issues when creating a virtual machine:

- Lack of resources.

An important thing in CloudStack-UI is that the system immediately checks that a user has the amount of resources required to create a virtual machine. It doesn’t allow launching the creation of a VM which will fail for sure because of the resource lack.

If you lack the required amount of resources, the message will appear when clicking “Create Virtual Machine”:

“Insufficient resources

You ran out of Primary storage”

No VM creation form is available.

- VM name is not unique.

If the name specified for the virtual machine is not unique within a domain, the dialogue window after VM creation will show an error. The VM will not be created. The creation form will be closed. You will have to open the VM creation form and fill it in again. You will have to specify another name for your VM.

<

cloudstack
open source cloud computing

Welcome, [redacted]

- Virtual machines
- Storage
- Images
- Firewall
- Activity log
- SSH keys
- Accounts
- Settings**
- Logout

Security

Change password

New password *

Repeat password *

UPDATE

Session timeout (in minutes)

30

UPDATE


☒ Save VM passwords by default


API configuration

API Key

FcsObS1Ayj_f6wNwY6GQ_vWVA5L

2.2.3 VM Action Box

Once a VM instance is created, you can stop, restart, or delete it as needed. These actions are available under the “Actions” button  to the right from each virtual machine in the list.

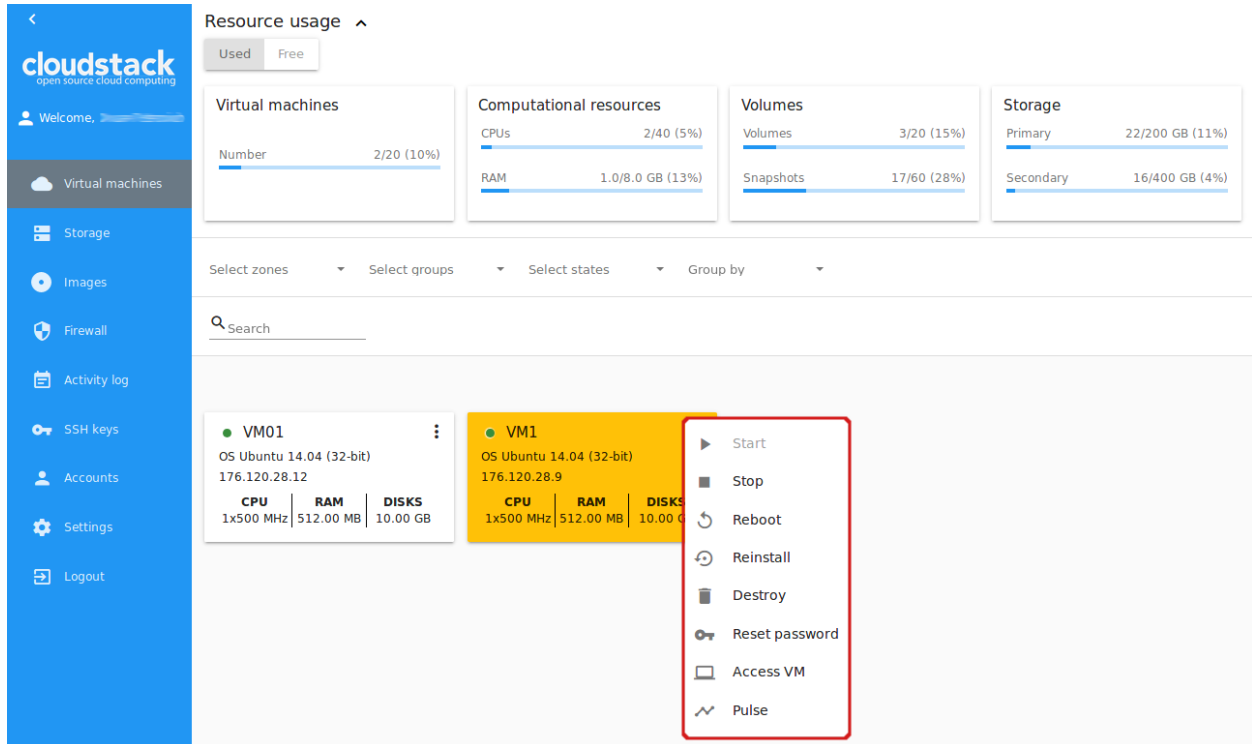

It allows performing the following actions with the VM:

- Start VM - Allows a user to launch a VM,
- Stop VM - Allows a user to stop a running VM,
- Reboot VM - Allows a user to restart a VM,
- Reinstall VM - Allows a user to reinstall a VM,
- Destroy VM - Allows a user to delete a VM. After deleting the virtual machine will remain in the system. It will look faded in the list and can be recovered later.

To recover a destroyed VM (which is not expunged) open the Actions list and click “Recover”.

Click “Expunge” to completely destroy the VM. The VM will not be available for recovering anymore.

When deleting a virtual machine, if the machine has data disks attached, the system will ask you in a dialogue window whether these disks should be deleted. Confirm your intention to delete them by clicking “Yes”. Click “No” to cancel the disk deleting.

- Reset password - Allows a user to change the password for VM (available for started VMs only in case a VM requires a password). The VM will be rebooted if you reset the password.

After clicking “Yes” the VM will be rebooted and a new password will be autogenerated for it. You will see the new password in the dialogue window.

Click “Save” to save the password for this VM. It will activate the “Save VM passwords by default” option in the *Settings* section. In the future the password will be saved automatically right at VM creation. Click “OK” to close the dialogue window.

Search

● VM1

OS Ubuntu 14.04 (32-bit)

176.120.28.7

CPU	RAM	DISKS
1x500 MHz	512.00 MB	10.00 GB

● VM3

OS Ubuntu 16.04 (64-bit)

176.120.28.9

CPU	RAM	DISKS
1x500 MHz	512.00 MB	92.00 GB

● VM3

OS Ubuntu 14.04 (32-bit)

176.120.28.7

CPU	RAM	DISKS
1x500 MHz	512.00 MB	12.00 GB

Expunge

Recover

Search

● qwerty

OS Ubuntu 14.04 (32-bit)

176.120.28.7

CPU	RAM	DISKS
1x500 MHz	512.00 MB	10.00 GB

● VM2

OS Ubuntu 14.04 (32-bit)

176.120.28.8

CPU	RAM	DISKS
1x1000 MHz	1.00 GB	12.00 GB

Are you sure you want to destroy this virtual machine?

☒ Expunge

NO YES

Resource usage ^

Account Domain Used Free

Virtual machines

Number 7/20 (35%)

Computational resources

CPU 8/40 (20%)

RAM 4.5/31.3 GB (14%)

Volumes

Volumes 10/20 (50%)

Snapshots 6/20 (30%)

Storage

Primary 96/200 GB (48%)

Secondary 80/400 GB (20%)

Select zones Select groups Select states Group by

Search

Delete this VM's data drives?

NO YES

vm-user-51

OS Ubuntu 10.04 (64-bit)

176.120.28.6

CPU 1x500 MHz RAM 512.00 MB DISKS 10.00 GB

vm-develop-342

OS Ubuntu 10.04 (64-bit)

176.120.28.9

CPU 2x1000 MHz RAM 1.00 GB DISKS 10.00 GB

vm-develop-381-sg

OS Ubuntu 10.04 (64-bit)

176.120.28.7

CPU 1x500 MHz RAM 512.00 MB DISKS 10.00 GB

vm-develop-sample5

OS Ubuntu 10.04 (64-bit)

IP N/A

CPU 1x500 MHz RAM 512.00 MB DISKS 10.00 GB

vm-user-5

OS Apple Mac OS X 10.6 (64-bit)

176.120.28.3

CPU 1x500 MHz RAM 512.00 MB DISKS 10.00 GB

vm-5

OS Ubuntu 10.04 (64-bit)

176.120.28.13

CPU 1x1000 MHz RAM 1.00 GB DISKS 10.00 GB

Volumes

Volumes 3/20 (15%)

Snapshots 17/60 (28%)

Storage

Primary 22/200 GB (11%)

Secondary 16/400 GB (4%)

Select zone

Search

Are you sure you want to reset password?
If your Virtual Machine is running it will be rebooted.

NO YES

VM01

OS Ubuntu 14.04 (32-bit)

176.120.28.12

CPU 1x500 MHz RAM 512.00 MB DISKS 10.00 GB

VM1

OS Ubuntu 14.04 (32-bit)

176.120.28.9

CPU 1x500 MHz RAM 512.00 MB DISKS 10.00 GB

The screenshot displays the CSUI interface with a modal dialog box in the center. The dialog box contains the text: "Password for VM01 has been reset to **z7MBPJ**". Below this, it says "Password: z7MBPJ" followed by a blue "SAVE" button. At the bottom right of the dialog is a blue "OK" button with a mouse cursor icon pointing at it. The background interface is dimmed and shows two panels at the top: "Volumes" and "Storage".

Volumes

Volumes	3/20 (15%)
Snapshots	17/60 (28%)


Storage

Primary	22/200 GB (11%)
Secondary	16/400 GB (4%)

Below the dialog, two VM cards are visible. The left card is for "VM01" and the right card is for "VM1". Both cards show "OS Ubuntu 14.04 (32-bit)" and the IP address "176.120.28.12" for VM01 and "176.120.28.9" for VM1. Below the IP, there is a table with CPU, RAM, and DISKS specifications.

CPU	RAM	DISKS
1x500 MHz	512.00 MB	10.00 GB

- Access VM - Opens an “Access VM” dialog window which allows to view VM name and IP, view and save a password for the VM and access the VM via the VNC console.

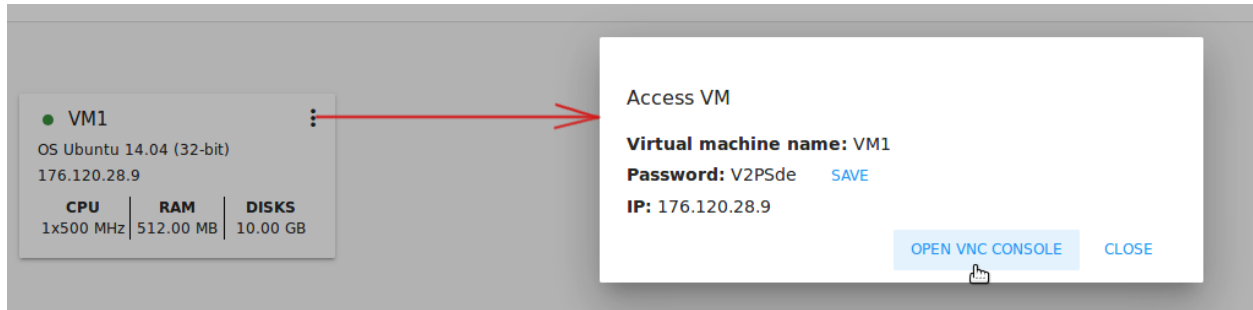

In the [Access a Virtual Machine](#) section you can find more information on accessing a VM.

- Pulse - It is a new feature created in CloudStack-UI to visualize the VM performance statistics. By clicking “Pulse” at the Actions box you will open a modal window with 3 tabs: CPU/RAM, Network, Disk. There you can see the charts of resources statistics for the VM.

You can adjust the graphs by range, data aggregation period, shift interval and other parameters.

This plugin is convenient for dynamic monitoring of VM performance. Find more information about it in the [official documentation](#). Pulse plugin deployment instructions can be found at the [page](#).


Note: Please, note, when performing one of the actions from the list, other actions in this list are disabled until the action in progress finishes.

2.2.4 VM Details Sidebar

For each virtual machine you can get the details.

By clicking a VM line or card you can open a sidebar to the right.

There you will find the information on the selected virtual machine:


1. VM name.
2. Color-picker  - Allows marking a virtual machine by a color to distinguish it in the list. The range of available colors for VMs is specified in the [configuration guide](#).
3. Actions on the VM. See the [VM Action Box](#) section below.


You will see four tabs in the sidebar. Let’s describe what information on the virtual machine is presented in each tab.

Virtual Machine Tab

The Virtual Machine tab contains the general setting of the VM. Some settings can be edited here. At the bottom you can see the Statistics section which shows real-time data for the VM performance.

1. Description - A short description of the VM. Click the block to edit it. Enter a few words about the VM. Click “Save” to save the description. It is a custom description for your machine. It is saved to tags with `csui.vm.description` tag.

The description can be edited. Click “Edit”  to change the description.

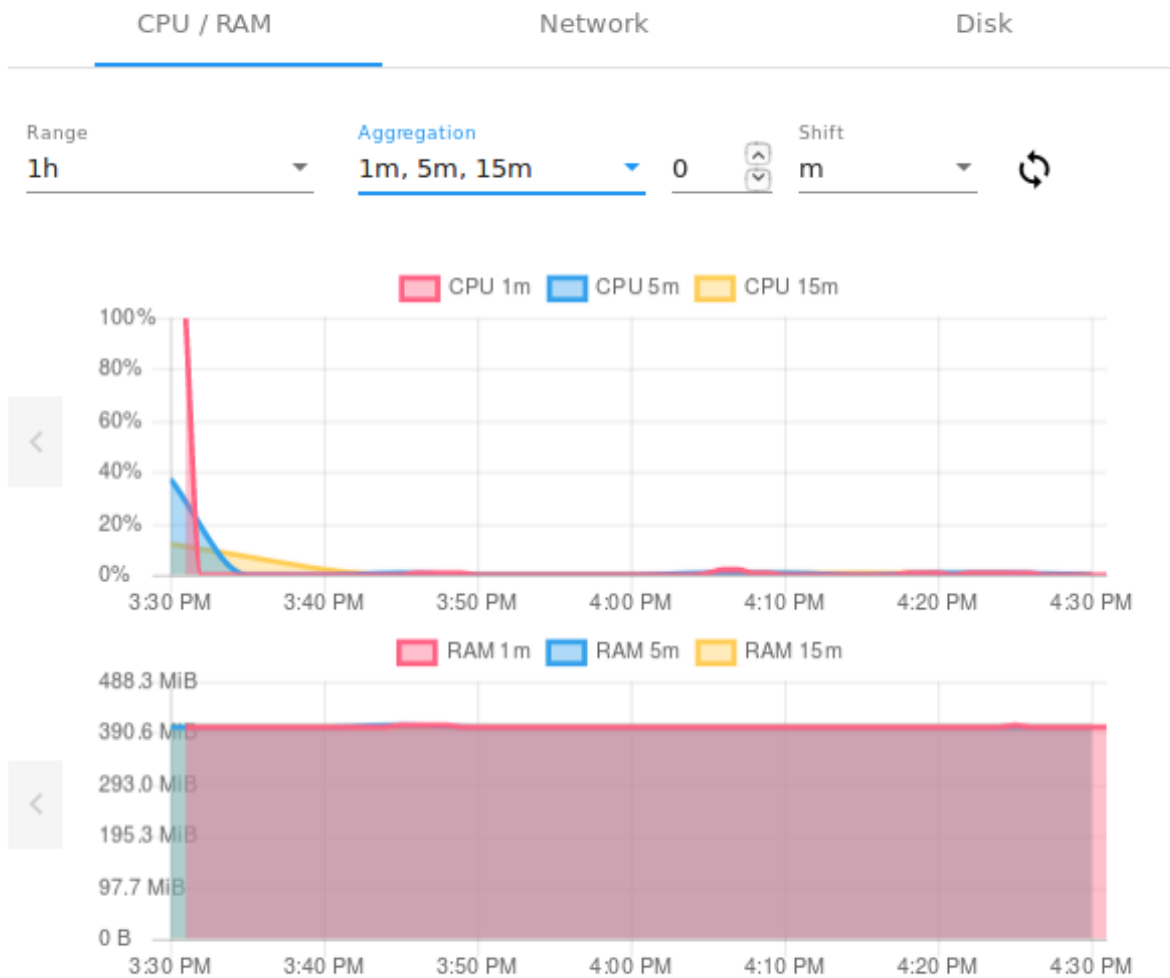

Resource usage ^

Used Free

Virtual machines

Number 2/20 (10%)

Computational resources

CPU 2/40 (5%)

RAM 1.0/8.0 GB (13%)

Volumes

Volumes

Snapshots

Storage

Primary 115/200 GB (57%)

Secondary 11/400 GB (3%)

Select zones Select groups Select states Group by

Search

VM2

OS Ubuntu 14.04 (32-bit)

176.120.28.8

CPU	RAM	DISKS
1x500 MHz	512.00 MB	10.00 GB

VM3

OS Ubuntu 16.04 (64-bit)

176.120.28.9

CPU	RAM	DISKS
1x500 MHz	512.00 MB	92.00 GB

VM2

Description

Click to edit

Zone

Tomsk

Group

No group

Service offering

Name	Small Instance
Description	Small Instance
CPU cores	1
CPU (MHz)	500
Memory (MB)	512

Affinity Group

No affinity group

Template

Ubuntu Server 14.04 (LVM2, IPv6)

SSH key

No SSH key

Statistics

CPU utilized	0,08%
Network read	49272 KB
Network write	50000 KB

VM2

Description

Enter text

Short description for VM2

CANCEL

SAVE

Zone

Tomsk

Group

Group1

It also can be edited from the Tags tab. Click “Edit” next to the `csui.vm.description` tag and change the description text in the appeared form.


The screenshot shows the OpenStack dashboard interface. At the top, there's a 'Resource usage' section with tabs for 'Used' and 'Free'. Below this, there are four summary cards: 'Virtual machines' (3/20 at 15%), 'Computational resources' (CPUs 3/40 at 8%, RAM 2.0/8.0 GB at 25%), 'Volumes' (3/20 at 15%), and 'Storage' (Primary 112/200 GB at 56%, Secondary 11/400 GB at 3%).

Below the summary cards is a 'Select zones', 'Select groups', 'Select states', and 'Group by' section. A search bar is also present.

The main content area displays a list of VMs. The first VM is 'qwert' (OS Ubuntu 14.04, 32-bit, 176.120.28.7). The second VM is 'VM2' (OS Ubuntu 14.04, 32-bit, 176.120.28.8), which is highlighted in green. The third VM is partially visible and has a red status icon.



An 'Edit tag' dialog box is open over the VM2 entry. It shows the 'Key' as 'csui.vm.description' and the 'Value' as 'Short description for VM2'. The dialog has 'CANCEL' and 'EDIT' buttons. A red arrow points from the 'csui.vm.description' tag in the right-hand 'Tags' panel to the 'EDIT' button in the dialog.

The 'Tags' panel on the right shows a list of tags for VM2, including 'csui', 'csui.vm.agreement-accepted', 'csui.vm.color', 'csui.vm.description', 'csui.vm.group', and 'csui.vm.password'. The 'csui.vm.description' tag is highlighted with a red line.

2. Zone - A zone selected for the VM to be available in.
3. Group - A custom group assigned to the VM. Edit this field by clicking the “Edit” button . In the appeared dialogue window choose a group from the drop-down list. Click “Assign” to assign the chosen group to the VM.

Or you can create a new group right from this window selecting the “Create a new group” option. Click “Assign” to assign the created group to the VM.

To remove the assigned group select the “Remove from the group” option and click “Remove” to eliminate the assigned group from the VM.

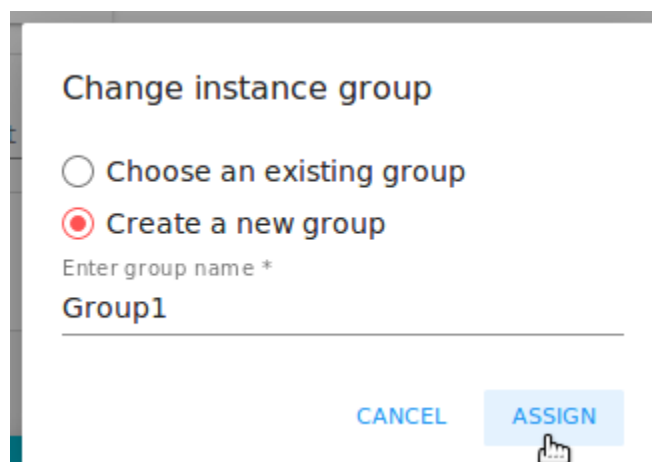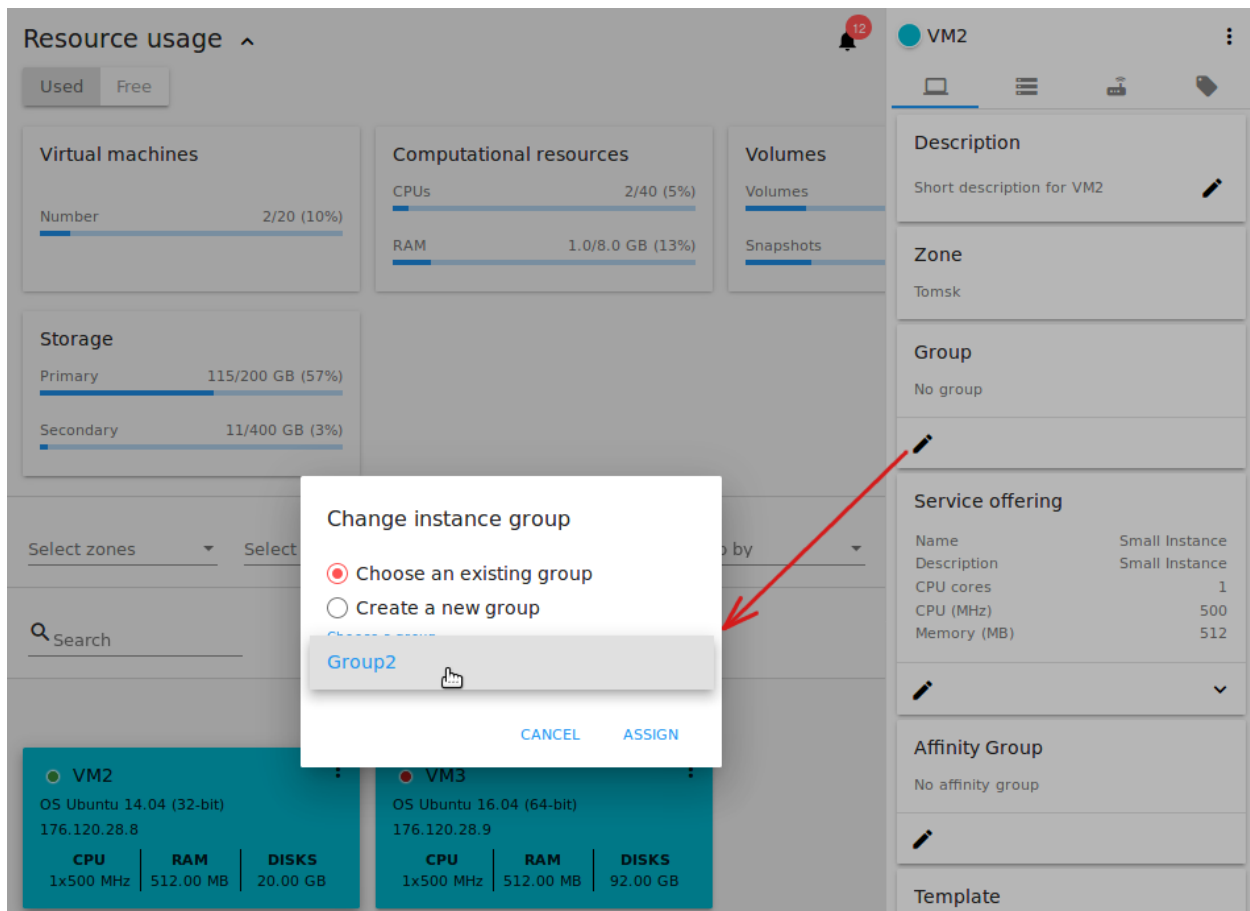

The screenshot displays the CSUI interface for managing virtual machines. The main panel shows resource usage for VM2, including Virtual machines, Computational resources, Volumes, Storage, and Description. A modal dialog box titled "Change instance group" is open, allowing the user to choose an existing group, create a new group, or remove the instance from the current group "Group1". A red arrow points from the "REMOVE" button in the dialog to the "Group" field in the VM2 details panel.

Resource usage

Used Free

Virtual machines

Number 2/20 (10%)

Computational resources

CPU 2/40 (5%)

RAM 1.0/8.0 GB (13%)

Volumes

Volumes

Snapshots

Storage

Primary 115/200 GB (57%)

Secondary 11/400 GB (3%)

VM2

Description

Short description for VM2

Zone

Tomsk

Group

Group1

Service offering

Name	Small Instance
Description	Small Instance
CPU cores	1
CPU (MHz)	500
Memory (MB)	512

Affinity Group

No affinity group

Template

Change instance group

- ☐ Choose an existing group
- ☐ Create a new group
- ☒ Remove from the group "Group1"

CANCEL REMOVE

VM2

OS Ubuntu 14.04 (32-bit)

176.120.28.8

CPU	RAM	DISKS
1x500 MHz	512.00 MB	20.00 GB


VM3


OS Ubuntu 16.04 (64-bit)

176.120.28.9

CPU	RAM	DISKS
1x500 MHz	512.00 MB	92.00 GB

The VM group is a custom group. It is saved to VM tags with `csui.vm.group` tag. From the Tags tab it also can be edited or deleted.

4. Service offering - The offerings of the VM. Expand the section to view the whole list of offerings. Edit this field by clicking the “Edit” button . In the appeared window select a new option.

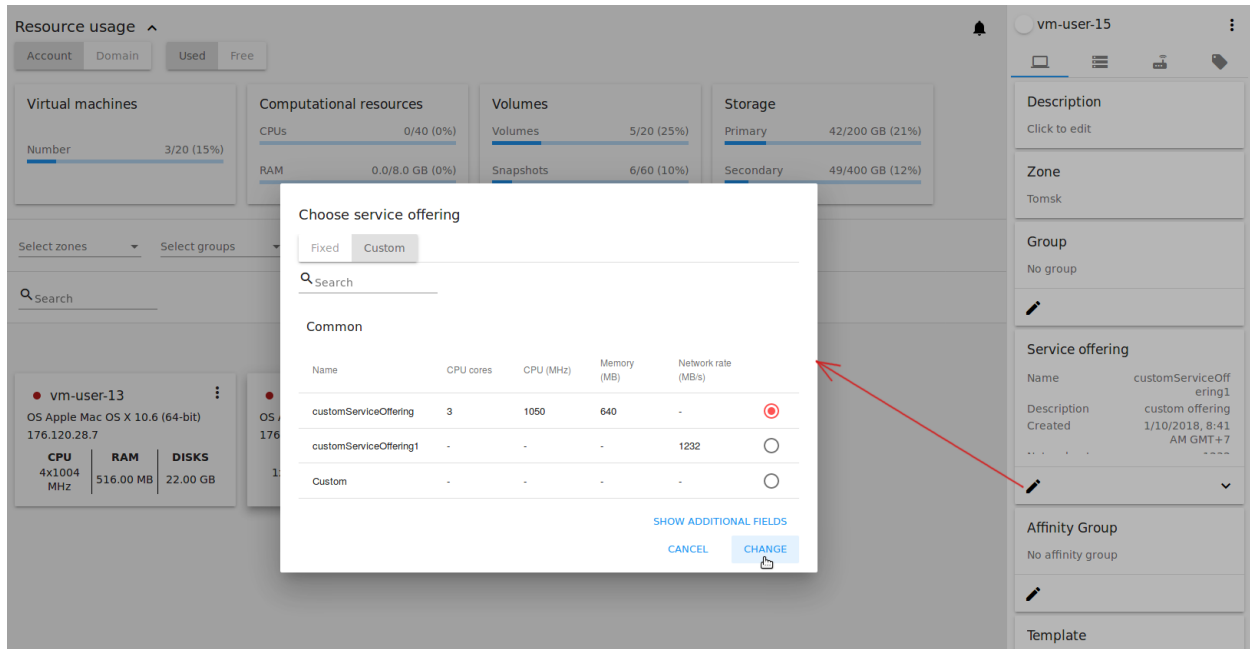

Click “Change” to implement the edits.

A started virtual machine will be rebooted at editing the service offering.


5. Affinity Group - The affinity group assigned to the virtual machine. Edit this field by clicking the “Edit” button. In the dialogue window, choose an existing group or create a new one right in the dialogue window. Click “Assign” to assign the group to the VM.

When assigning an affinity group to the started virtual machine, the system will suggest you stopping the VM. Click “OK” in the dialogue window. Then the VM will be started again.

The selected group can be removed by clicking “Edit” and choosing “Remove from the group” in the dialogue window.

6. Template - Shows the template used to create the virtual machine.
7. SSH key - Shows the SSH key of the virtual machine. Add the SSH key by clicking “+”. In the appeared window select the SSH key form the drop-down list and click “Change”:

At saving the new SSH key for a started VM you will see the warning: “You need to stop the virtual machine to reset SSH key.” Click “OK” if you want to stop it right now. Click “Cancel” to drop the edits.

8. Statistics - shows VM statistics on CPU utilized, Network read, Network write, Disk read, Disk write, Disk read (IO), Disk write (IO). Refresh data by clicking the “Refresh” button  in the upper-right corner.

Storage Tab

The second tab - Storage - contains the information on the volumes allocated to the virtual machine.

In this tab the following information is presented:

Resource usage ^

Used Free

Virtual machines

Number 2/20 (10%)

Computational resources

CPU 2/40 (5%)

RAM 1.0/8.0 GB (13%)

Volumes

Volumes

Snapshots

Storage

Primary 115/200 GB (57%)

Secondary 11/400 GB (3%)

Select zones Select group by

Search

Select affinity group

☐ Choose an existing group

☒ Create a new group

Enter group name *

Group1

CANCEL ASSIGN

Description

Short description for VM2

Zone

Tomsk

Group

Group1

Service offering

Name	Medium Instance
Description	Medium Instance
CPU cores	1
CPU (MHz)	1000
Memory (MB)	1024

Affinity Group

No affinity group

Template

Ubuntu Server 14.04 (LVM2, IPv6)

SSH key

VM2

OS Ubuntu 14.04 (32-bit)

176.120.28.8

CPU	RAM	DISKS
1x1000 MHz	1.00 GB	20.00 GB

VM3

OS Ubuntu 16.04 (64-bit)

176.120.28.9

CPU	RAM	DISKS
1x500 MHz	512.00 MB	92.00 GB

Resource usage ^

Used

Free

Virtual machines

Number

2/20 (10%)

Computational resources

CPU

2/40 (5%)

RAM

1.0/8.0 GB (13%)

Volumes

Volumes

Snapshots

Storage

Primary

115/200 GB (57%)

Secondary

11/400 GB (3%)

Select zones

Select

by

Search

VM2

OS Ubuntu 14.04 (32-bit)

176.120.28.8

CPU

1x1000 MHz

RAM

1.00 GB

DISKS

20.00 GB

VM3

OS Ubuntu 16.04 (64-bit)

176.120.28.9

CPU

1x500 MHz

RAM

512.00 MB

DISKS

92.00 GB

Description

Short description for VM2

Zone

Tomsk

Group

Group1

Service offering

Name

Medium Instance

Description

Medium Instance

CPU cores

1

CPU (MHz)

1000

Memory (MB)

1024

Affinity Group

No affinity group

Template

Ubuntu Server 14.04 (LVM2, IPv6)


SSH key

No SSH key

You need to stop the virtual machine to change affinity group. Do you want to stop it now?

CANCEL

OK

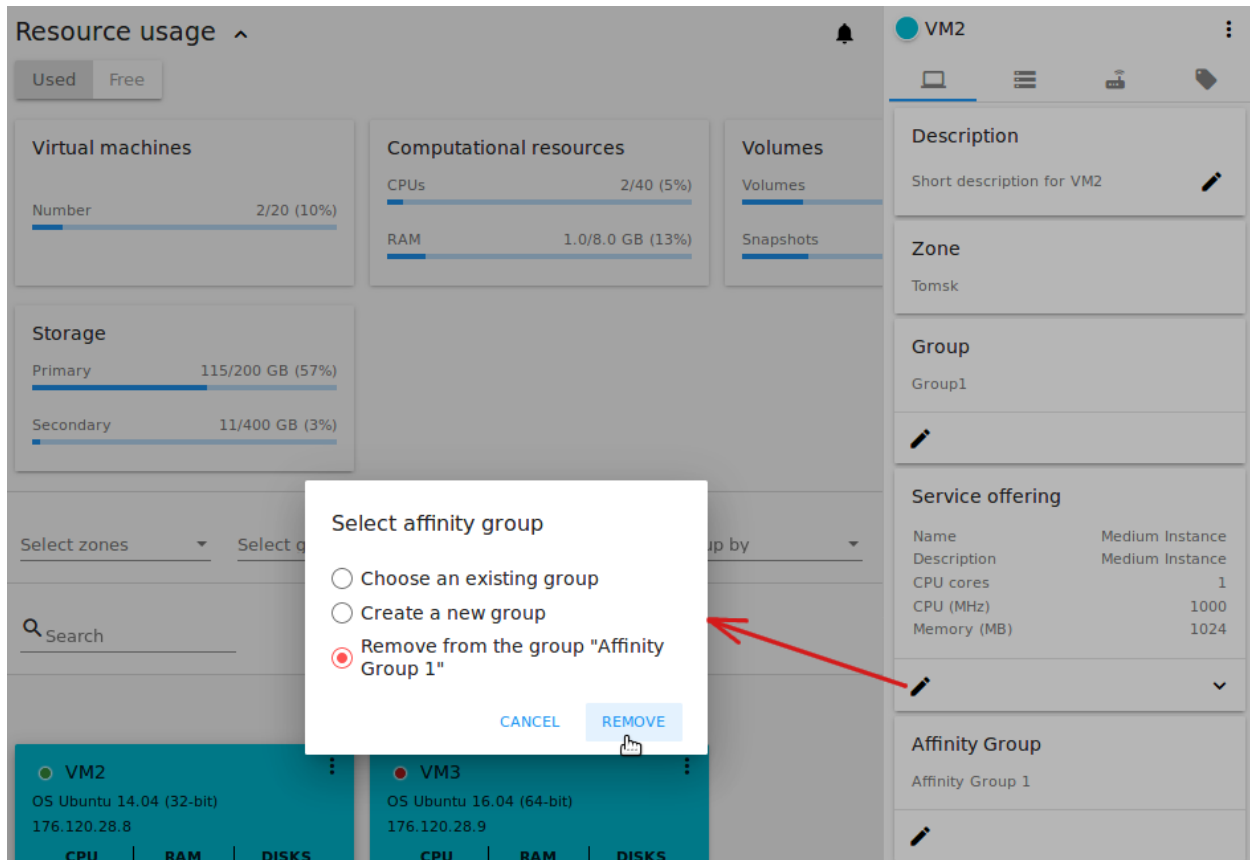

1. Disk information

Each VM has a root disk. Besides, data disks can be added to the VM.

The following general information on a root disk is presented (expand the card to see the whole list):

- Name - The disk name.
- Size - The disk size.
- Creation Date and Time.
- Storage Type (Shared/Local)
- Last Snapshot information.

2. Attach a volume - Allows attaching a data disk to the VM.

Additional volume (a data disk) can be attached to the VM. Click “Select” to select a data disk. Select a disk in the drop-down list and click “Select”.

The chosen data disk will appear for the virtual machine with the “Attach” button. Click “Attach” to attach the selected disk to the virtual machine.

If there are no available spare drives yet, you can create one right from this panel.

Click “Create new volume” and you will be moved to the Storage section. A “New volume” form will appear where you should specify the following information:

- Name * - Name of the new data disk.
- Zone * - Select a zone for it from the drop-down list.

The screenshot displays the CloudStack UI interface. On the left, the 'Resource usage' section shows metrics for virtual machines, computational resources (CPUs, RAM), and storage. On the right, the details for VM2 are shown, including its description, zone, group, service offering, affinity group, template, and SSH key status (currently 'No SSH key'). A modal dialog titled 'Select SSH key' is open in the center, showing 'user-key-1' as the selected option with 'CANCEL' and 'CHANGE' buttons. A red arrow originates from the '+' icon in the 'SSH key' field of the VM2 details panel and points to the 'CHANGE' button in the dialog.

The screenshot displays the 'Resource usage' interface in the CSUI. The main panel shows resource usage for VM2, including Virtual machines, Computational resources, and Storage. A sidebar on the right provides detailed information about VM2's storage configuration, including a list of volumes and a section to attach a volume.

Resource usage

Used Free

Virtual machines

Number 2/20 (10%)

Computational resources

CPU 2/40 (5%)

RAM 1.0/8.0 GB (13%)

Volumes

Volumes

Snapshots

Storage

Primary 115/200 GB (57%)

Secondary 11/400 GB (3%)

Select zones Select groups Select states Group by

Search

VM2

OS Ubuntu 14.04 (32-bit)

176.120.28.8

CPU	RAM	DISKS
1x500 MHz	512.00 MB	20.00 GB

VM3

OS Ubuntu 16.04 (64-bit)

176.120.28.9

CPU	RAM	DISKS
1x500 MHz	512.00 MB	92.00 GB

Storage

ROOT-529

10 GB

No snapshots

Data disk 1

10 GB

Last snapshot: [VIEW ALL \(12\)](#)

detached_Data disk 1_20171222130141

12/22/2017, 8:01 PM GMT+7


Attach a volume

Select a volume

+

ISO

DrWeb LiveCD 2017.12.12

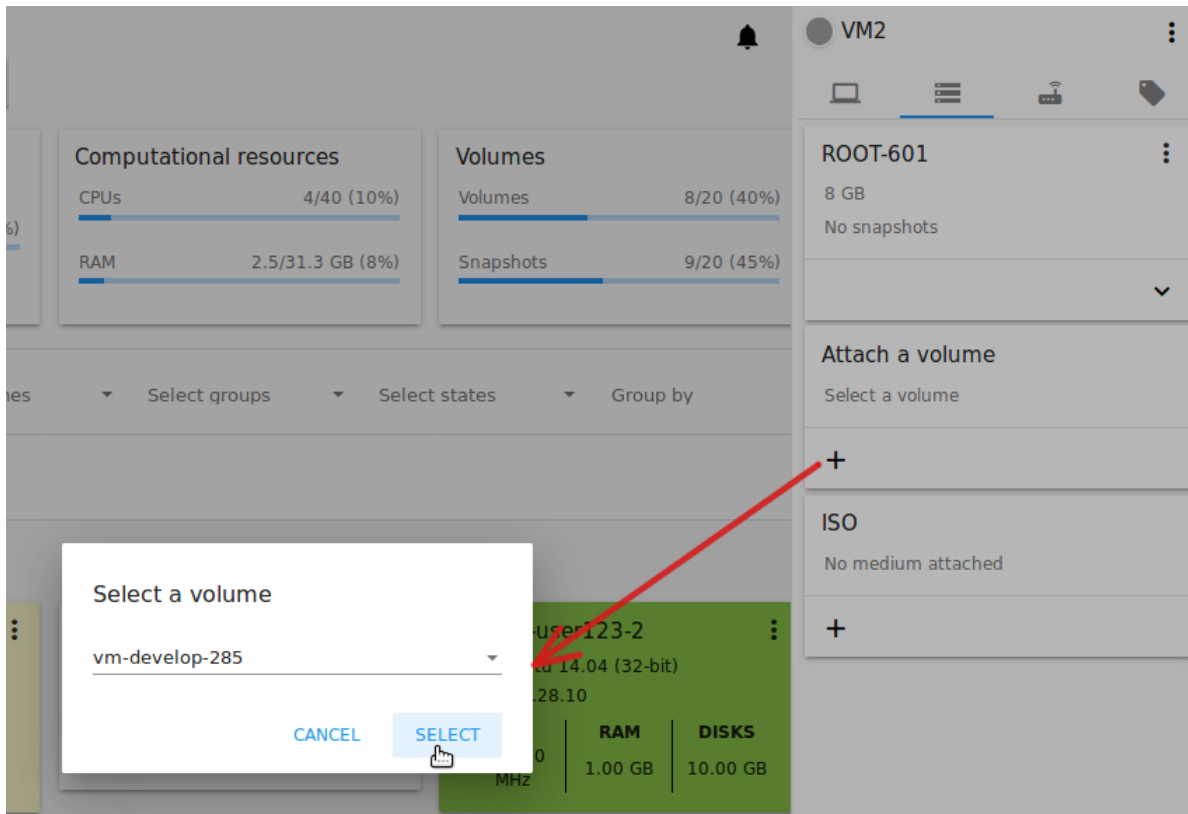

- Disk offering * - Select a disk offering from the list in the modal window. The disk offering list is managed by Root Administrator.
- Size - Set the disk size if it is available. Disk size can be changed if a custom disk offering is selected above.


Note: Required fields are marked with an asterisk (*).

Once all fields are filled in, click “Create” to save the new volume.

Click “Cancel” to drop the new volume creation.

Move back to the virtual machine information sidebar. Under the “Storage” tab in the “Attach a volume” section click “+” to select an additional disk. Select a data disk in the drop-down list and click “Select” to add it to the “Attach a volume” section. To attach the volume press the “Attach” button.


Volume Action Box


For each volume the Actions list can be opened by clicking the actions icon .

The following actions on disks are available in this list:

For root disks:

- Take a snapshot;
- Set up snapshot schedule;
- Resize the disk.

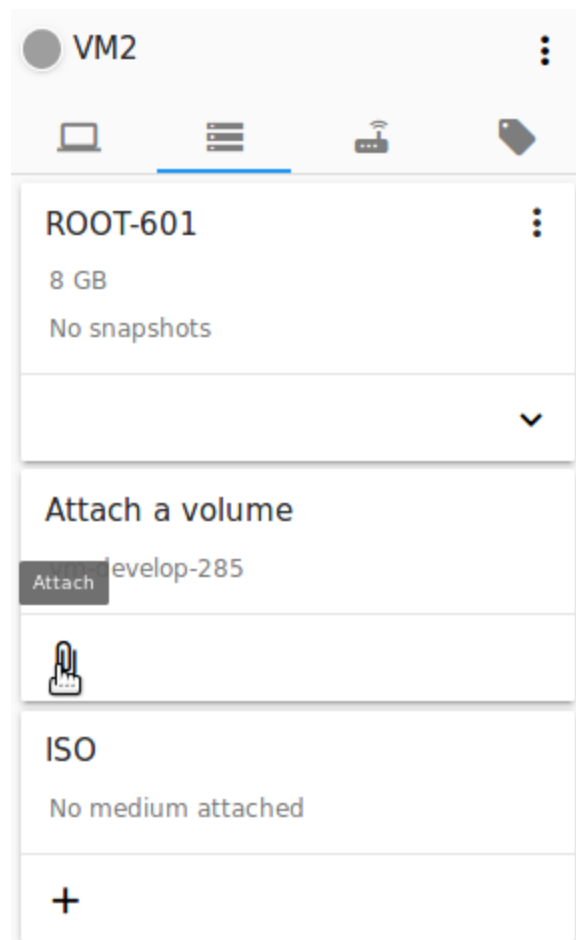

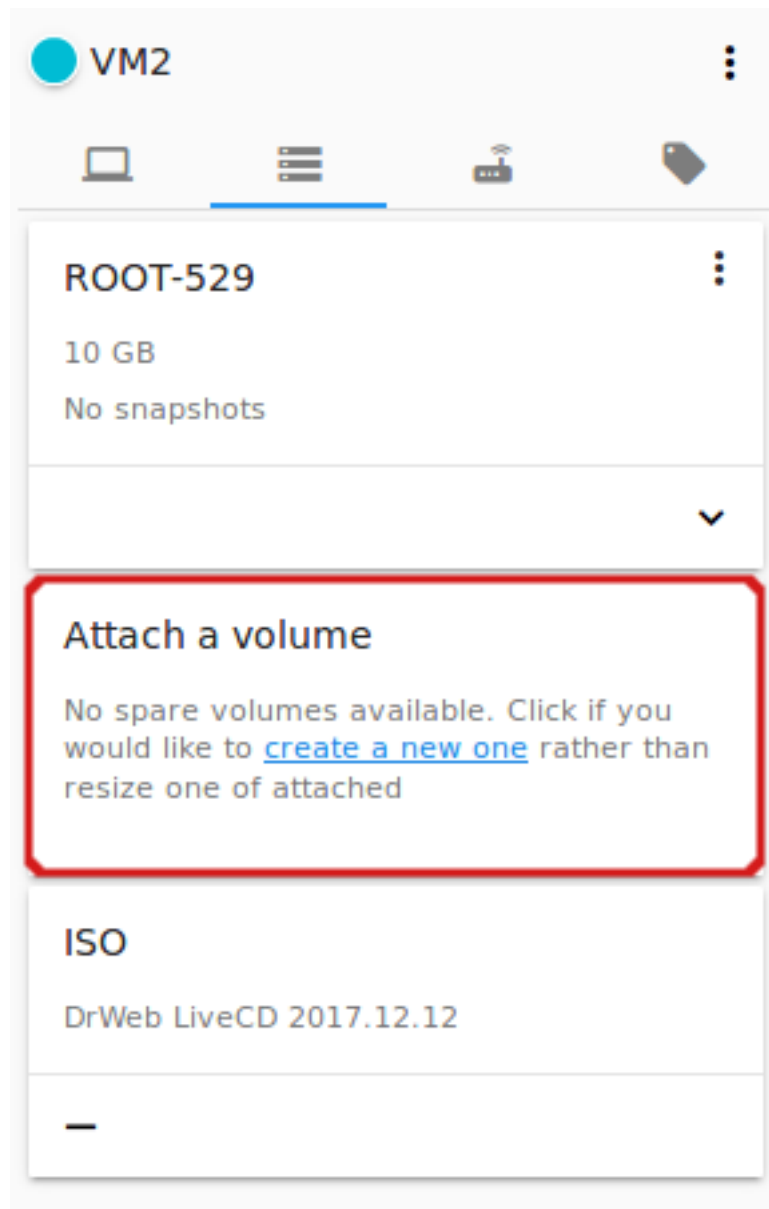

The screenshot shows a 'New volume' dialog box. At the top, it says '10 GB' and 'Ready'. Below that, 'Size: 10 GB' and 'State: Ready'. The dialog has a title 'New volume'. It contains a 'Name *' field with 'Data disk 1', a 'Zone *' dropdown with 'Tomsk', a 'test-do-3' field, and a 'Size' field with '10 GB'. There is a 'SELECT' button next to 'test-do-3'. At the bottom, there are 'CANCEL' and 'CREATE' buttons. The 'CREATE' button is highlighted with a red rectangle.

For data disks:

- Take a snapshot;
- Set up snapshot schedule;
- Detach;
- Resize the disk;
- Delete.

Take a snapshot


You can take a VM snapshot to preserve all the VM's data volumes as well as (optionally) its CPU/memory state. This is useful for quick restore of a VM.

Click "Take a snapshot" in the disk Actions list and in the dialogue window enter the following information:

- Name of the snapshot * - Define a name for the snapshot. It is auto-generated in the form <date>-<time>. But you can specify any name you wish.
- Description - Add a description of the snapshot to know what it contains.

Note: Required fields are marked with an asterisk (*).

All snapshots are saved in the list of snapshots. In the disk information, you will see the name and time of the *last-taken snapshot*. For each snapshot the list of actions is available. Find more information on snapshot actions in the *Snapshot Action Box* sections below.

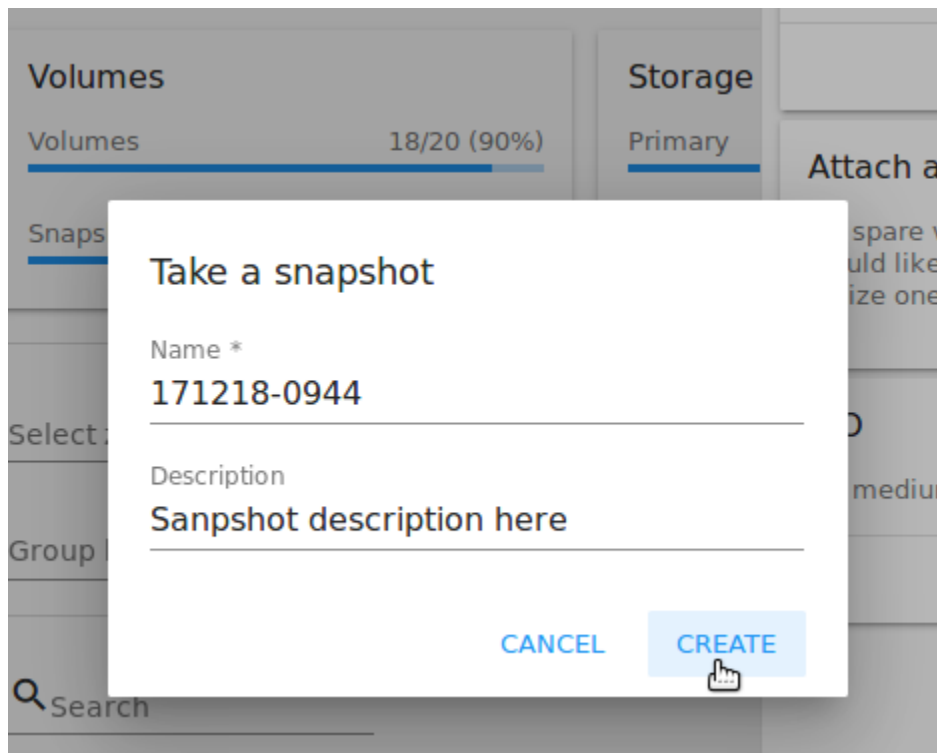

Set up snapshot schedule

You can schedule regular snapshotting by clicking “Set up snapshot schedule” in the Actions list.

In the appeared window set up the schedule for recurring snapshots:

- Select the frequency of snapshotting - hourly, daily, weekly, monthly;
- Select a minute (for hourly scheduling), the time (for daily scheduling), the day of week (for weekly scheduling) or the day of month (for monthly scheduling) when the snapshotting is to be done;
- Select the timezone according to which the snapshotting is to be done at the specified time;
- Set the number of snapshots to be made.

Click “+” to save the schedule. You can add more than one schedule but only one per each type (hourly, daily, weekly, monthly).

Resize the disk

Note: This action is available to data disks created on the base of disk offerings with a custom disk size. Disk offerings with custom disk size can be created by Root Administrators only.

Selecting “Resize the disk” option in the Actions list you are able to enlarge the disk size.



In the appeared window set up a new size using the slider and click “Resize” to save the edits.


Click “Cancel” to drop the size changes.

Detach

This action can be applied to data disks. It allows detaching the data disk from the virtual machine.

Click “Detach” in the Actions list and confirm your action in the dialogue window.

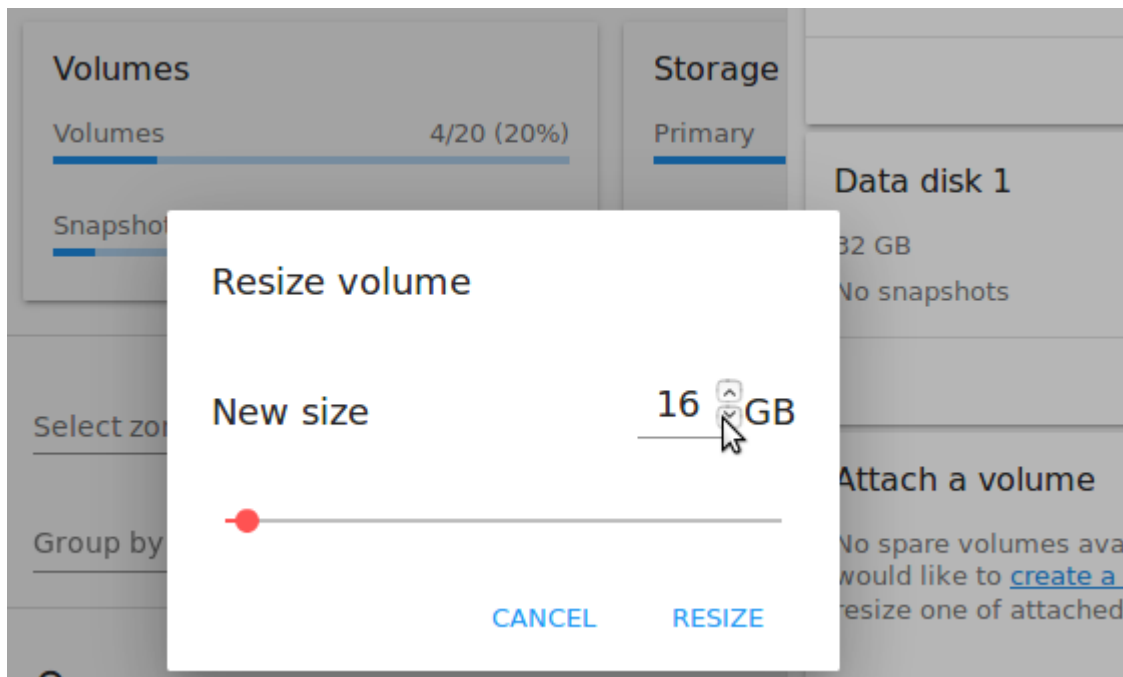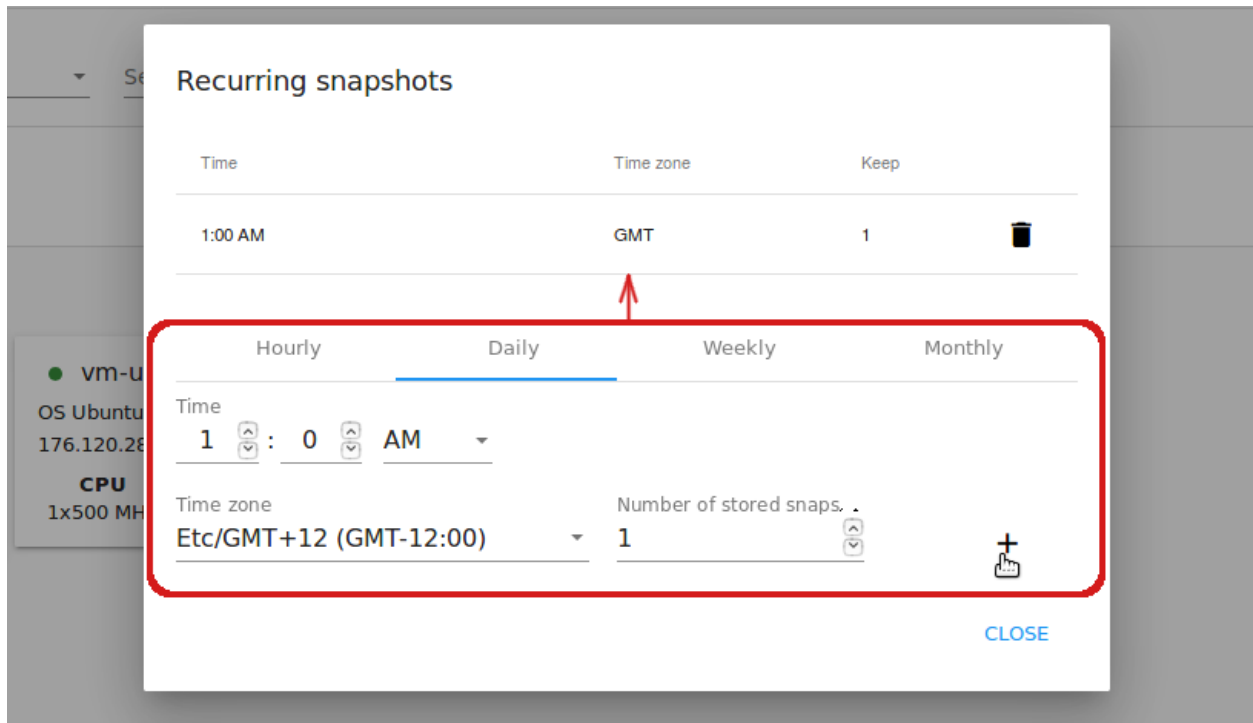

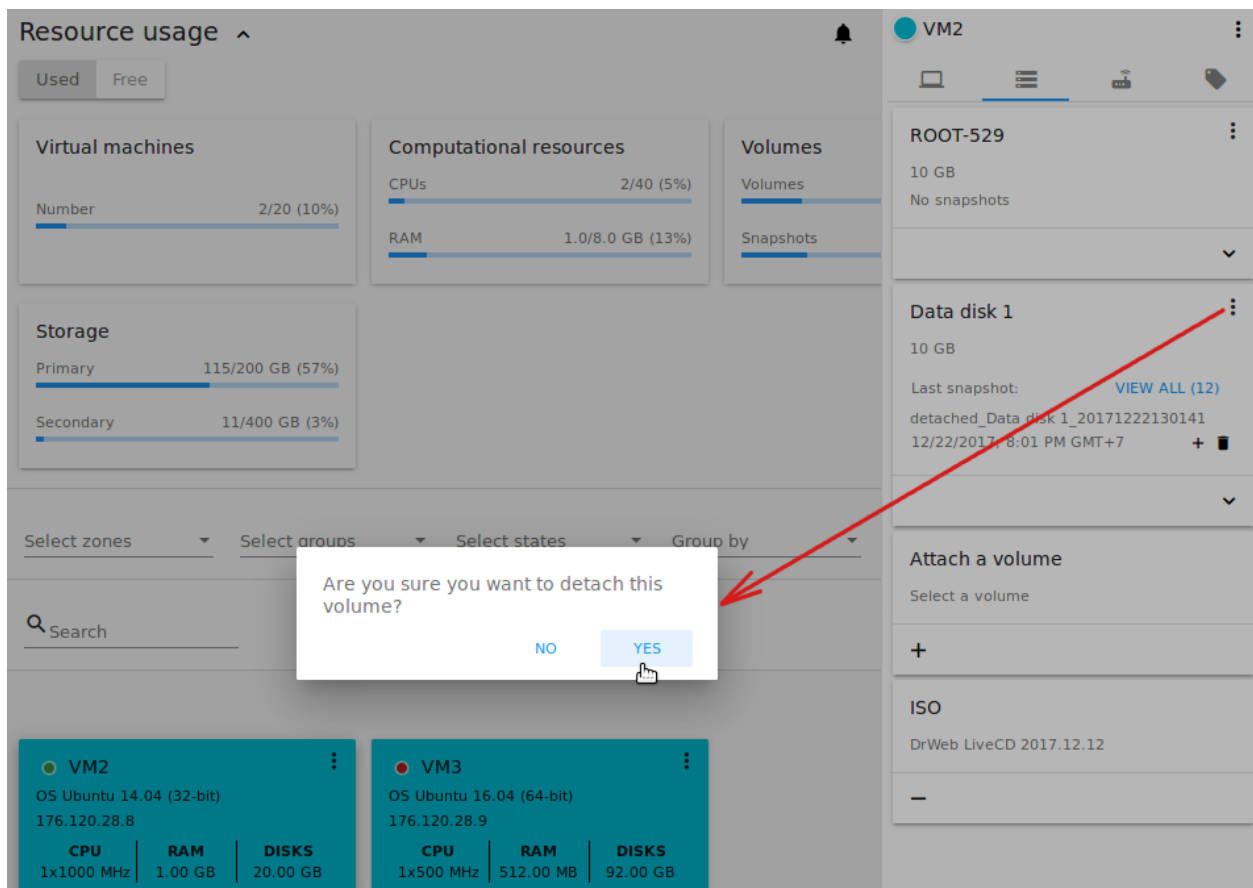


The data disk will be detached. It will be in the list of **Spare** drives in the *Storage* section.

Delete

This action can be applied to data disks. It allows deleting a data disk from the system right in the *Storage* VM details sidebar.

Click “Delete” in the volume Actions list and confirm your action in the dialogue window.

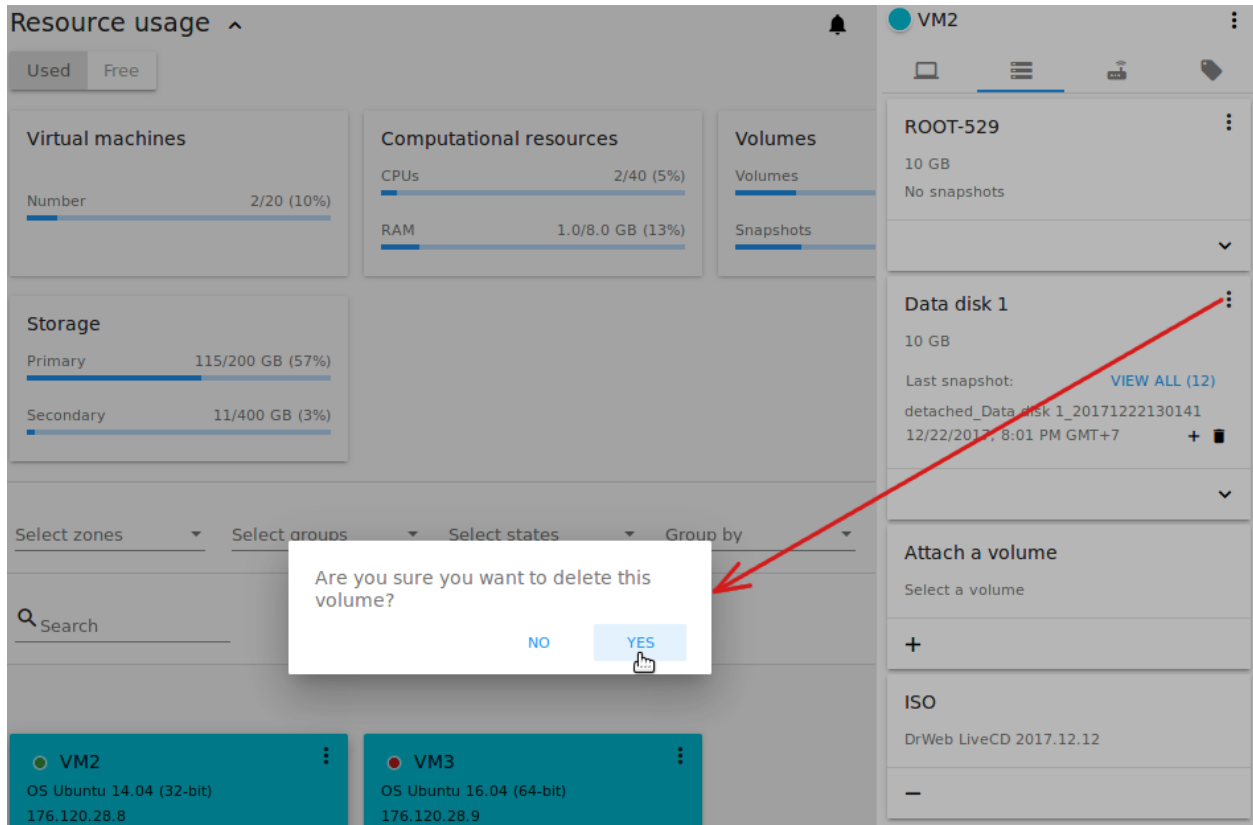

The data disk will be deleted from the system right at this moment.

Snapshot Action Box

For each snapshot the following actions are available:


- **Create a template** - Register a new template right from the disk information block of the sidebar. In the appeared window fill in the form:
 - Name * - Enter a name of the new template.
 - Description * - Provide a short description of the template.
 - OS type * - Select an OS type from the drop-down list.
 - Group - Select a group from the drop-down list.
 - Password enabled - Tick this option if your template has the CloudStack password change script installed. That means the VM created on the base of this template will be accessed by a password, and this password can be reset.

- Dynamically scalable - Tick this option if the template contains XS/VM Ware tools to support dynamic scaling of VM CPU/memory.

Note: Required fields are marked with an asterisk (*).


Click “Show additional fields” to expand the list of optional settings. It allows creating a template that requires HVM. Tick this option in this case.

Once all fields are filled in click “Create” to create the new template.

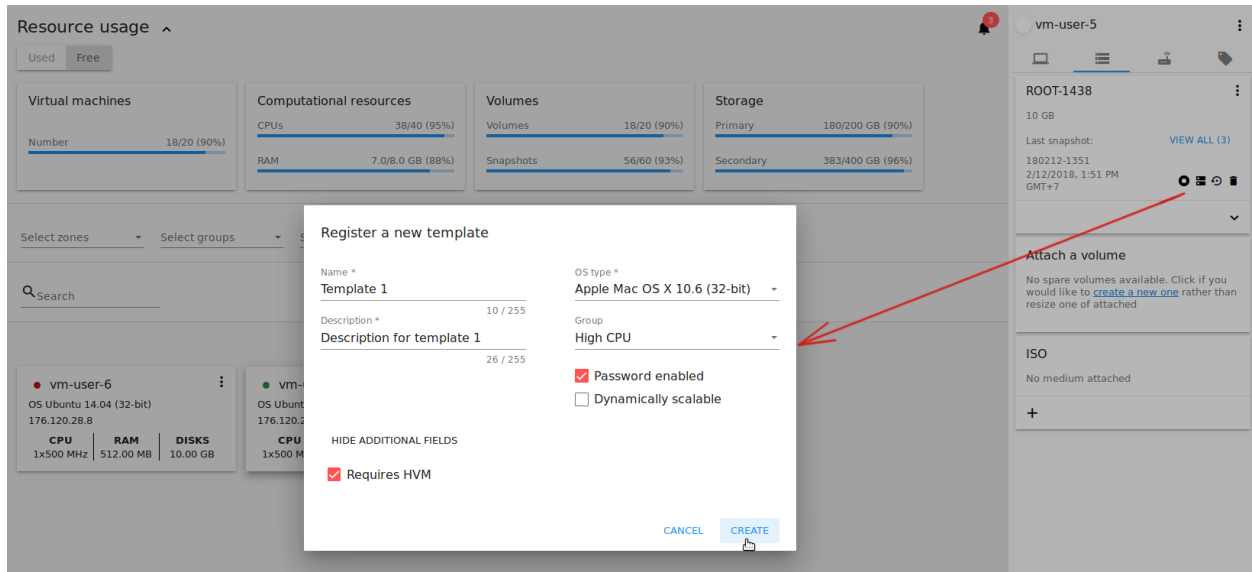

- **Create Volume** - Allows creating a volume from the snapshot.


Type a name for a new volume into the Name field in the modal window. Click “Create” to register a new volume.

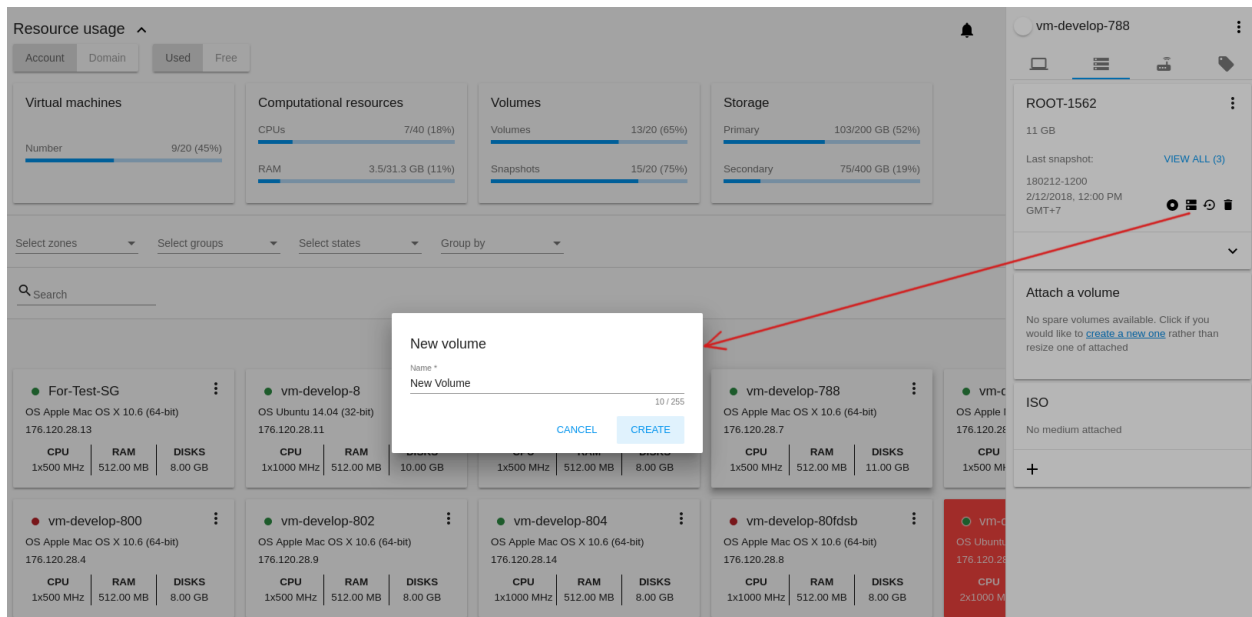

Click “Cancel” to cancel the volume creation.


- **Revert Volume To Snapshot** - Allows turning the volume back to the state of the snapshot.

In the dialogue window confirm your action. Please, note, the virtual machine the volume is assigned to will be rebooted.

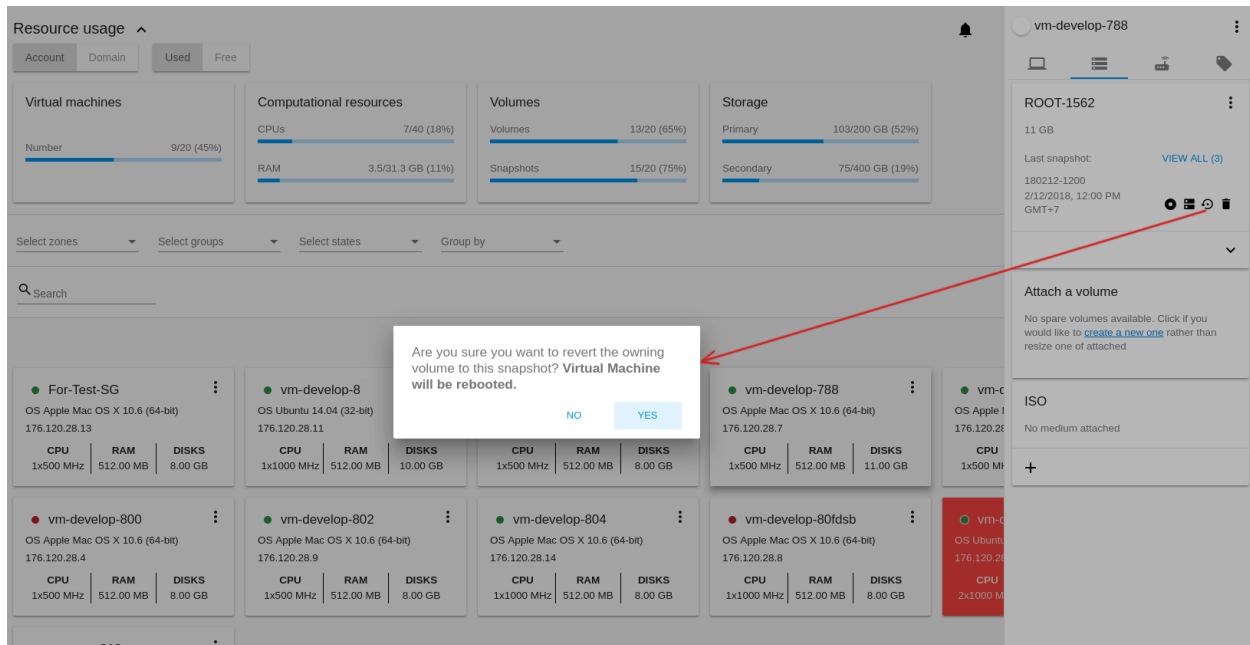

- **Delete** - allows deleting the last-taken snapshot.


Besides, you can see all the snapshots in the list by clicking the “VIEW ALL” button. In the appeared window you will see the list of all snapshots. For each snapshot in the list, the same actions are available: you can create a template, or delete a snapshot.

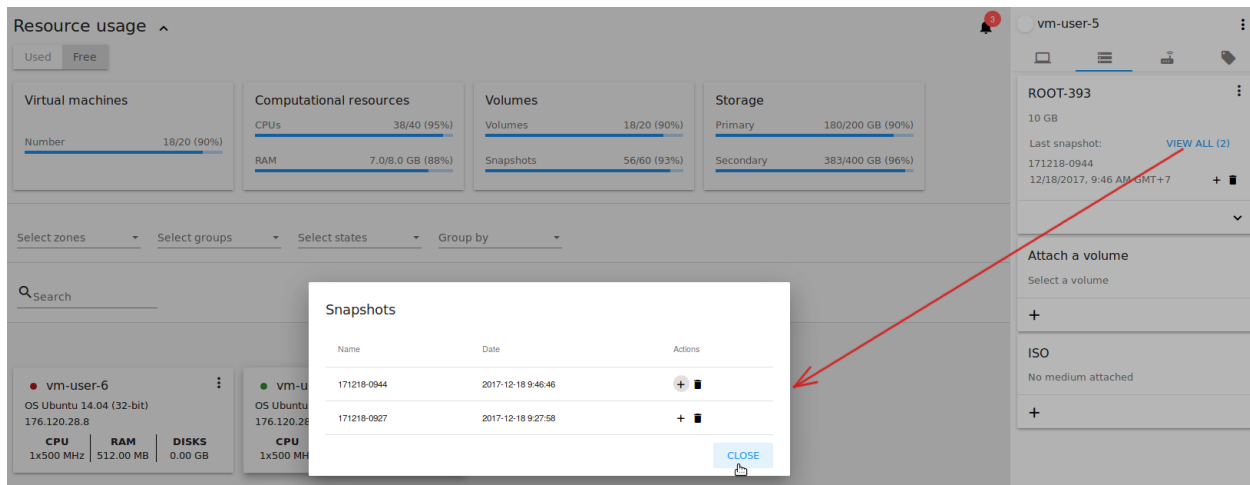

3. ISO - Allows attaching ISO.

Attach ISO by clicking the “Attach” button in the ISO card. In the dialogue window you will see the list of available ISO files. To easily find the ISO file you need, please, use the search tool above the list. Additionally, you can filter the list by OS family(-ies), by type(-s), by group(-s). Tick the ISO file you wish in the list and click “Attach”. The ISO will be attached to the VM.

You can detach the ISO file by clicking the “Detach” button.

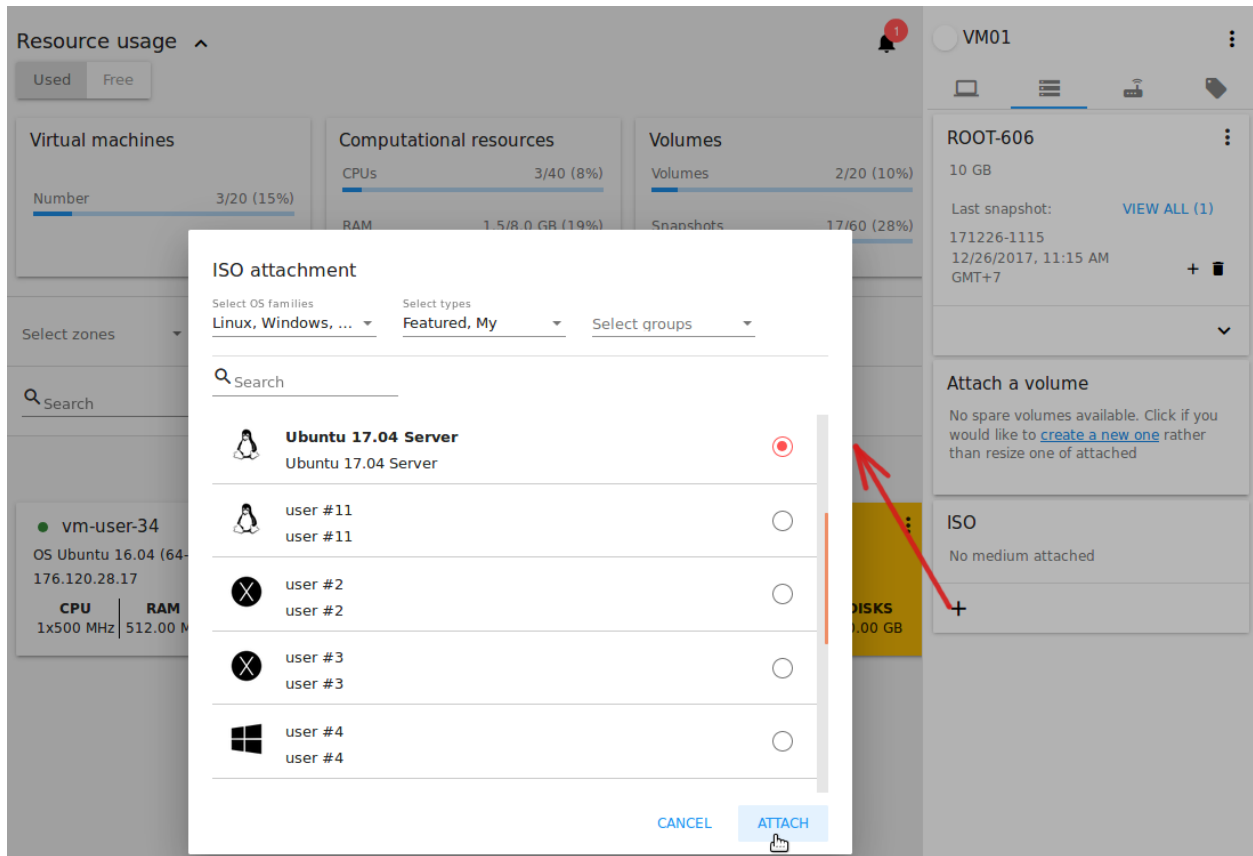


Network Tab

Under the Network tab the network configurations of the VM are presented.

1. **NIC information** - VM network details are shown here: Network name, Netmask, Gateway, IP, Broadcast URI, Traffic Type, Type, Default, MAC address.

You can add a secondary IP for the VM from this tab. Click “+” next to the Secondary IP option and confirm your action in the dialogue window. The IP appears for the VM.

You can delete the secondary IP by clicking the “Delete” button next to it.

2. **Firewall rules** - Allows viewing the security group assigned to the virtual machine. Click  to open the list of assigned security group(s).

You can filter the list by types and/or protocols. Or you can adjust the view by grouping the list by types and/or protocols.

In the modal window you can edit a security group. Click “Edit” to move to editing form. There you will be able to add rules, or delete the selected ones from the list.

To add rules, please, fill in the fields in the bar above the list and click “+”:





To delete rules, please, click Delete icon in the list. The rule will be deleted from the security group.

Then you can move back to the view mode, or close the window.

Please, note, when editing shared security groups, a warning message appears:

Click “Yes” if you still want to edit a shared security group. You will be moved to the “Firewall” section where you

vm-user-8




ROOT-396

10 GB

Last snapshot: [VIEW ALL \(1\)](#)


171218-1056
12/18/2017, 10:56 AM
GMT+7


+ 

Attach a volume

No spare volumes available. Click if you would like to [create a new one](#) rather than resize one of attached

ISO

Detach  Ubuntu 17.04 Server



The screenshot displays the CloudStack UI interface. The main section, titled "Resource usage", shows various resource metrics for VM2:

- Virtual machines:** Number 2/20 (10%)
- Computational resources:** CPUs 2/40 (5%), RAM 1.0/8.0 GB (13%)
- Volumes:** Volumes, Snapshots
- Storage:** Primary 115/200 GB (57%), Secondary 11/400 GB (3%)

Below these metrics are filters for "Select zones", "Select groups", "Select states", and "Group by". A search bar is also present.

At the bottom, two VM cards are shown:

- VM2:** OS Ubuntu 14.04 (32-bit), 176.120.28.8. CPU: 1x500 MHz, RAM: 512.00 MB, DISKS: 20.00 GB.
- VM3:** OS Ubuntu 16.04 (64-bit), 176.120.28.9. CPU: 1x500 MHz, RAM: 512.00 MB, DISKS: 92.00 GB.

On the right, a sidebar for VM2 is open, showing the "NIC#1 Configuration" tab. The configuration details are as follows:

Property	Value
IPv4	176.120.28.8/23
MAC address	1e:00:96:00:01:05
Gateway v4	176.120.28.1
Type	Shared
IPv6 address	2001:67c:20dc:1c00:1c00:9...
IPv6 CIDR	2001:67C:20DC:1C00::/64
IPv6 gateway	2001:67C:20DC:1C00::1
Secondary IP	+

Below the configuration, the "Firewall rules" section shows a single rule with ID 93112271-8702-4f73-a693-7cc52d7f...

vm-user-8

NIC#1 Configuration

IPv4	176.120.28.8/23
MAC address	1e:00:57:00:01:05
Gateway v4	176.120.28.1
Type	Shared
IPv6 address	2001:67c:20dc:1c00:1c00:...
IPv6 CIDR	2001:67C:20DC:1C00::/64
IPv6 gateway	2001:67C:20DC:1C00::1
Secondary IP	176.120.28.12

Firewall rules

default

VM01

Computational resources

CPU	6/40 (15%)
RAM	4.0/31.3 GB (13%)

Volumes

Volumes	16/20 (80%)
Snapshots	9/20 (45%)

Storage

Primary	177/200 GB (89%)
Secondary	77/400 GB (19%)

NIC#1 Configuration

IPv4	176.120.28.12/23
MAC address	1e:00:5b:00:01:09
Gateway v4	176.120.28.1
Type	Shared
IPv6 address	2001:67c:20dc:1c00:1c00:5bf...
IPv6 CIDR	2001:67C:20DC:1C00::/64
IPv6 gateway	2001:67C:20DC:1C00::1
Secondary IP	+

Firewall rules



c42d41dd-6119-47fa-9c1d-7fc0f53744bc...



Rules for c42d41dd-6119-47fa-9c1d-7fc0f53744bc-cs-sg

Select types Select protocols Group by

- Incoming TCP traffic to ip 0.0.0.0/0 to port range 1-65535
- Incoming ICMP traffic to ip 0.0.0.0/0 of ICMP type Any [-1] and ICMP code Any [-1]
- Incoming UDP traffic to ip 0.0.0.0/0 to port range 1-65535
- Outgoing TCP traffic to ip 0.0.0.0/0 to port range 1-65535
- Outgoing UDP traffic to ip 0.0.0.0/0 to port range 1-65535
- Outgoing ICMP traffic to ip 0.0.0.0/0 of ICMP type Any [-1] and ICMP code Any [-1]

EDIT CLOSE

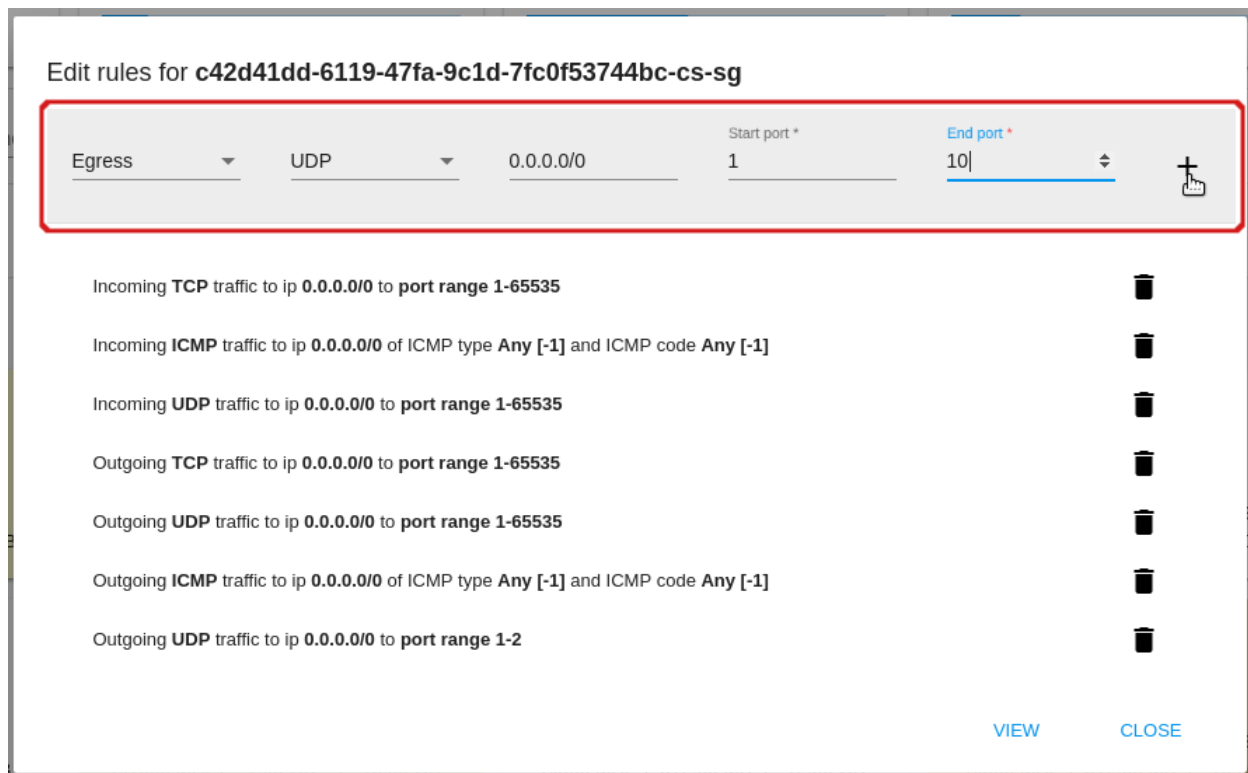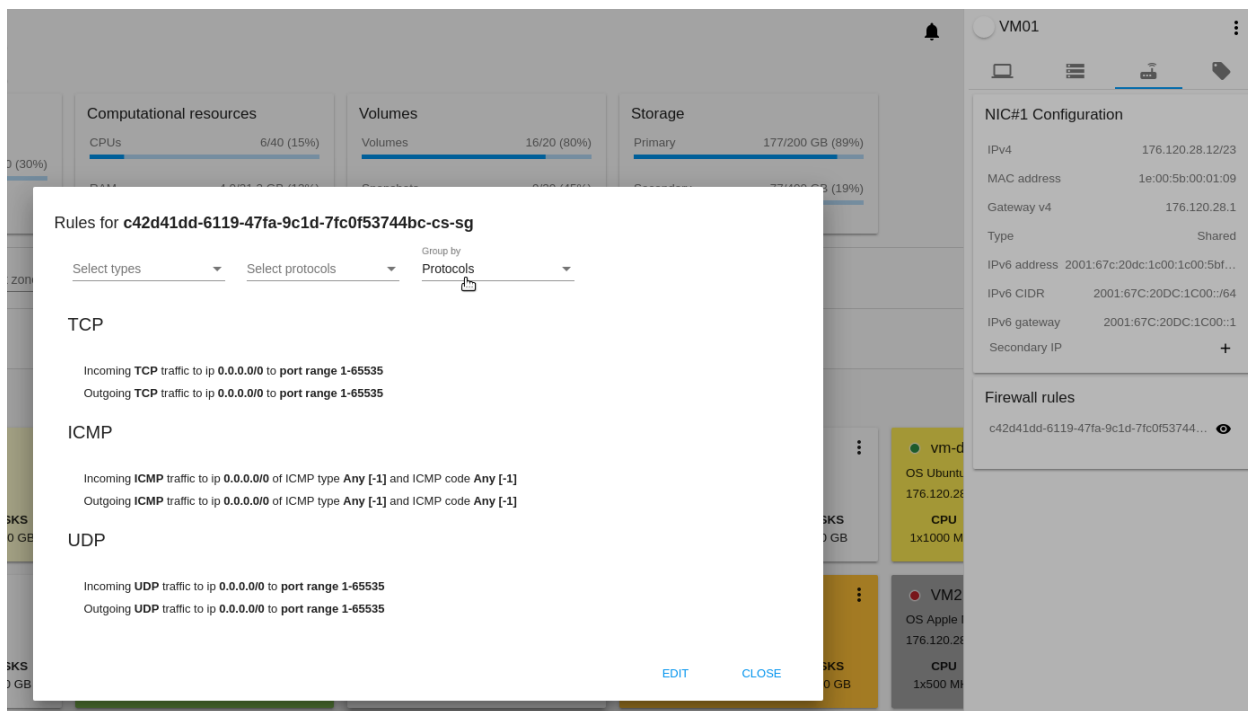

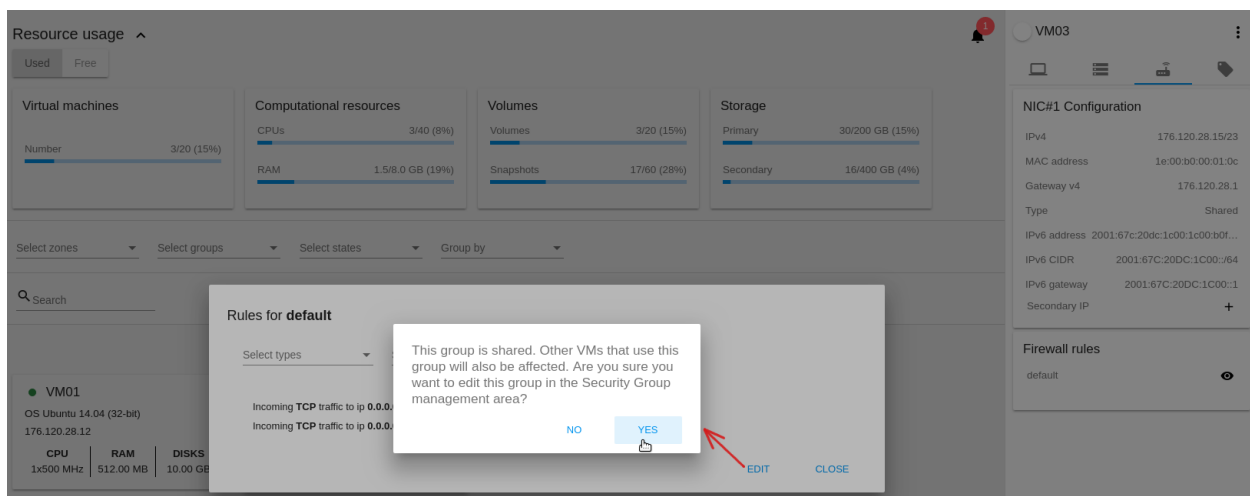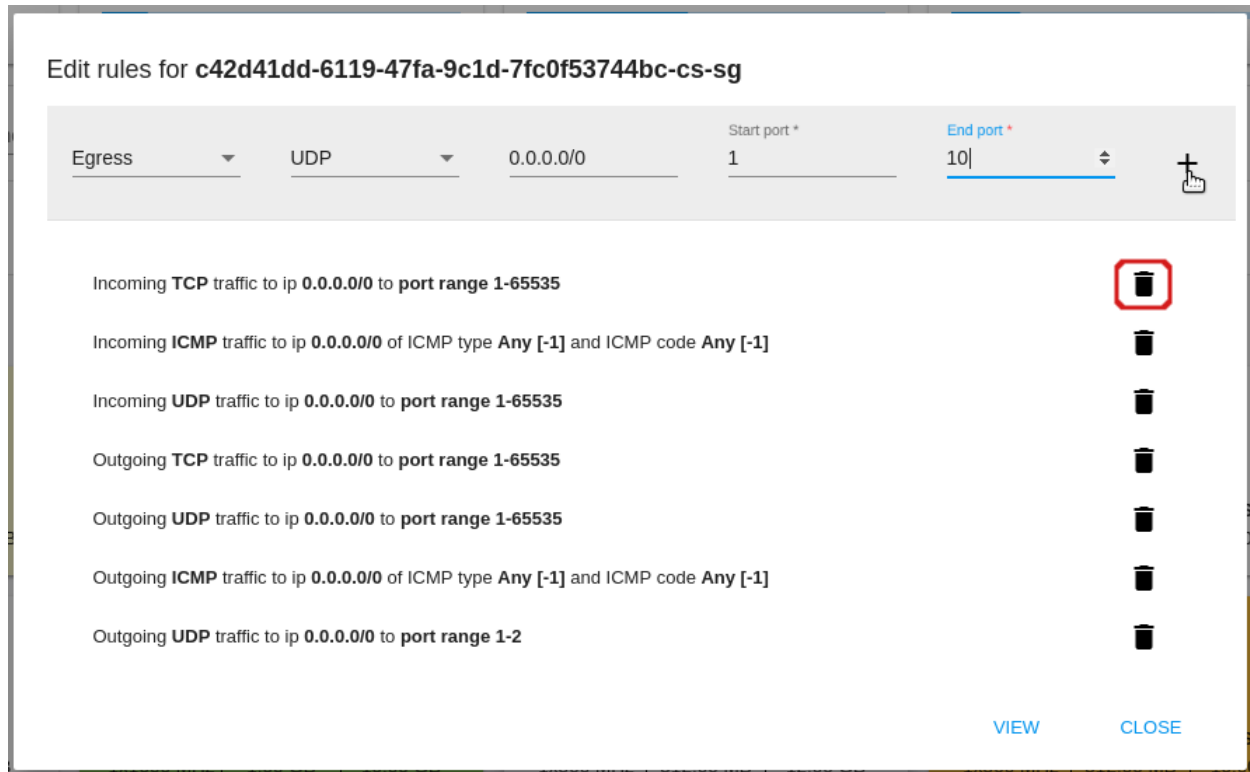

can edit the security group. After editing, go back to the virtual machine that uses this group. You will see the rules are edited.

See the [Firewall](#) section for more information on firewall rules in the system.

Tags Tab

Under this tab you can create and see the VM tags.

The screenshot shows the CloudStack-UI interface for VM2. The 'Tags' tab is selected, displaying a search bar and a list of system tags. The tags are:

Tag Name	Value
csui	
csui.vm.agreement-accepted	true
csui.vm.color	#00BCD4
csui.vm.password	K7pCvE

The interface also shows resource usage for VM2, including virtual machines, computational resources, volumes, and storage. The 'Tags' tab is highlighted, showing a search bar and a list of system tags. The tags are:

CloudStack-UI uses tags very extensively to provide additional UX capabilities. Tags are key-value pairs. So it makes a kind of a key-value storage for the meta-information - VM description or group, or a user language. The tags used by Cloudstack-UI are system tags. They are prefixed with `csui`. You can find the full list of system tags supported by CloudStack-UI at the [page](#).

System tags are used to provide functionality from the user interface perspective. Changing these tags affects the functionality of the application. The “Show system tags” checkbox allows to view or hide system tags of the virtual machine. Uncheck this box to hide system tags from the list. It helps to avoid accidental unwanted changes. If a user has disabled displaying of these tags, the system will remember it and next time tags will also be hidden.

To find the tag you are interested in, please, use the search tool above the tag list. You can enter a name or a part of the tag name to distinguish it in the list.

The tags assigned to the virtual machine are presented in the list. System tags are presented in one card, other tags - in a separate card. For each tag in the list the following actions are available when hovering the mouse over the tag key:

- Edit - Allows editing the tag. In the appeared form define a new key and/or value (both fields are required). Click “Edit” to save the edits. Click “Cancel” to drop the edits. The tag won’t be changed then.

vm-user-5

Search

+ group

☒ Show system tags

csui	
csui.vm.agreement-accepted	true
csui.vm.group	Group 1
csui.vm.password	9YusEz

+

- Delete - Allows deleting the tag. Click “Delete” and confirm your action in the dialogue window.

Create Tags

You can create a tag right from *Tags* tab.

Click “Create”  and fill in the appeared form:

Note: Required fields are marked with an asterisk (*).

- Key * - Enter a key here.
- Value * - Enter the value here.

When adding a system tag, click “+” in the card to open the creation form. You will see that the `csui` prefix is automatically prepopulated here.

If you create a non-system tag, it will be saved in a new card. If you have entered a key in the format `<prefix>.<example>`, a card will be named as “`<prefix>`”. When creating a new tag from this card, click “+” in the card and in the tag creation form the *Key* field will be prepopulated with the `<prefix>`.

2.2.5 Access a Virtual Machine

Depending on the installation source (ISO or a Template) the system allows getting an access to the VM interaction interface. Currently, the following options are supported:

- Open VNC console - This button under the “Access VM” action allows opening a console.

Resource usage ^

Used Free

Virtual machines

Number 2/20 (10%)

Computational resources

CPU 2/40 (5%)

RAM 1.0/8.0 GB (13%)

Volumes

Volumes

Snapshots

Storage

Primary 115/200 GB (57%)

Secondary 11/400 GB (3%)

Select zones Select groups Select states Group by

Search

VM2

OS Ubuntu 14.04 (32-bit)

176.120.28.8

CPU	RAM	DISKS
1x500 MHz	512.00 MB	20.00 GB

VM3

OS Ubuntu 16.04 (64-bit)

176.120.28.9

CPU	RAM	DISKS
1x500 MHz	512.00 MB	92.00 GB

VM2

Search

☒ Show system tags

Common

Key1	Value1
+	

csui

csui.vm.agreement-accepted	true
csui.vm.color	#00BCD4
csui.vm.password	K7pCvE
+	

Computational resources

CPU 3/40 (8%)

RAM 1.5/8.0 GB (19%)

Volumes

Volumes 4/20 (20%)

Snapshots 17/60 (28%)

Storage

Primary 24/200 GB (12%)

Secondary 16/400 GB (4%)

Select states Group by

Search

VM01

OS Ubuntu 14.04 (32-bit)

176.120.28.12

CPU	RAM	DISKS
1x500 MHz	512.00 MB	10.00 GB

VM01

Search

☒ Show system tags

csui




csui.vm.agreement-accepted	true
csui.vm.group	Group1
csui.vm.password	undefined
+	

Create a new tag


Key * prefix.example 14 / 255

Value * 1 1 / 255


CANCEL CREATE

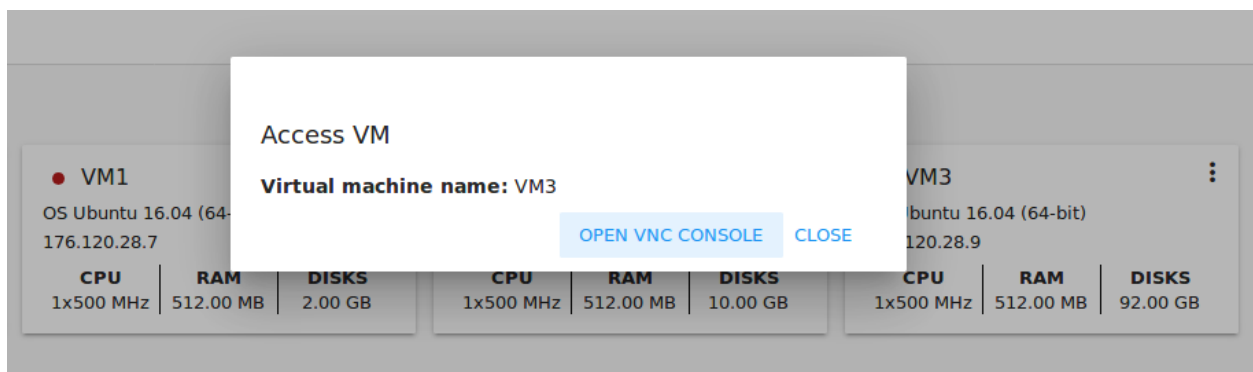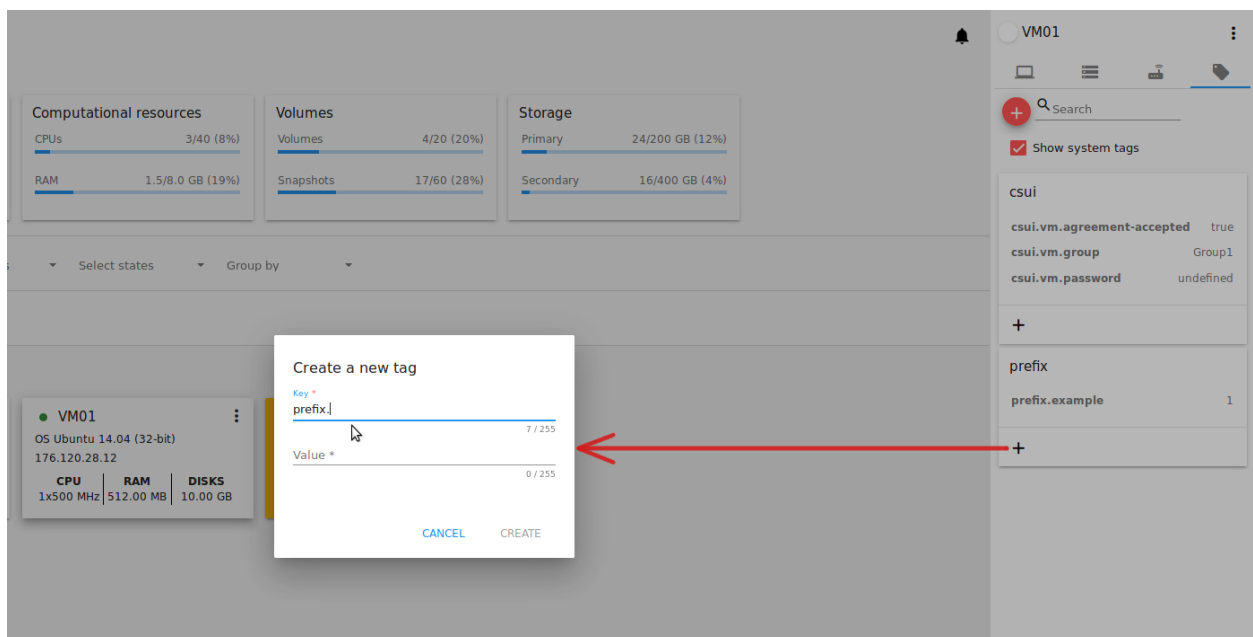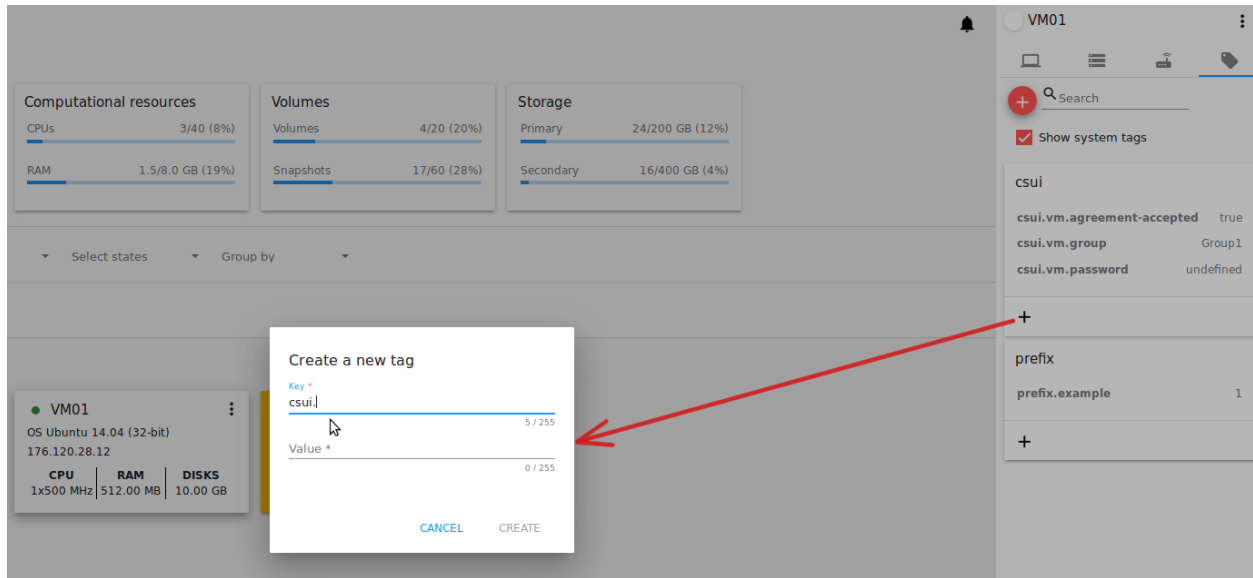

- WebShell if VM has a `csui.vm.auth-mode` tag with SSH value. To find more information on accessing VM via WebShell, please, refer to the [page](#). See the detailed instructions on the deployment of WebShell Plugin [here](#).

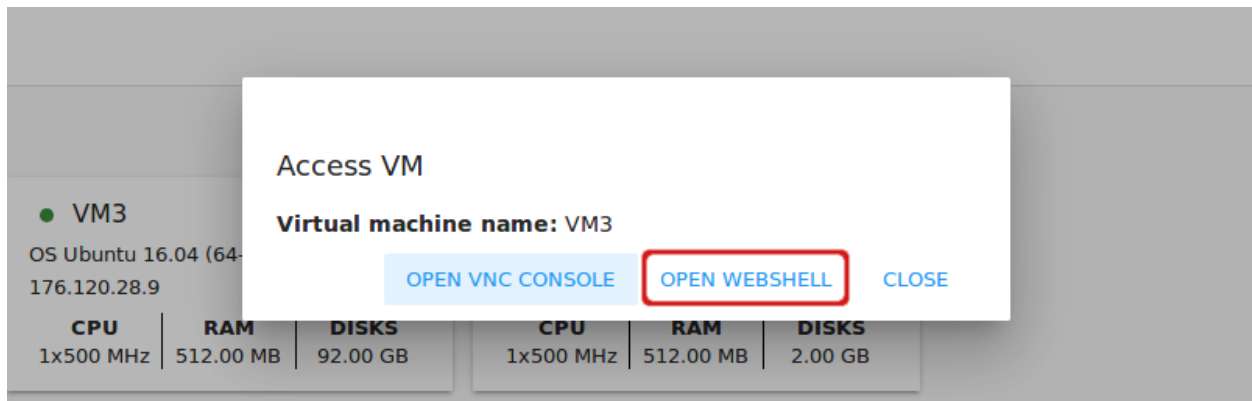

- Access via HTTP if VM has a `csui.vm.auth-mode` tag with HTTP value. To configure access to VM via HTTP, please, refer to [page](#).

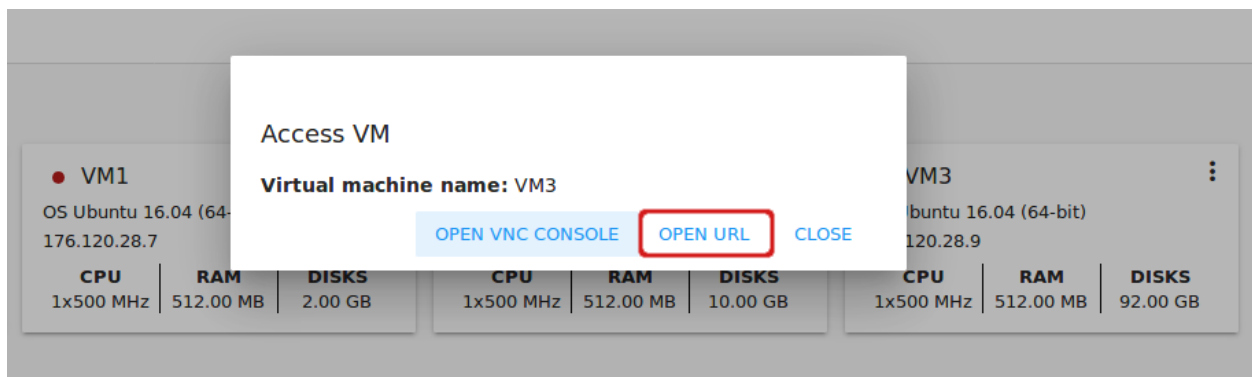

You can choose the way you like and make necessary settings.

2.3 Storage


Contents

- *Storage*
 - *Drive list*
 - * *Filtering of Drives*
 - *Create New Volume*
 - *Volume Details Sidebar*
 - * *Snapshots Action Box*
 - *Volume Action Box*



In the *Storage* section, you can create and manage drives for virtual machines.

2.3.1 Drive list

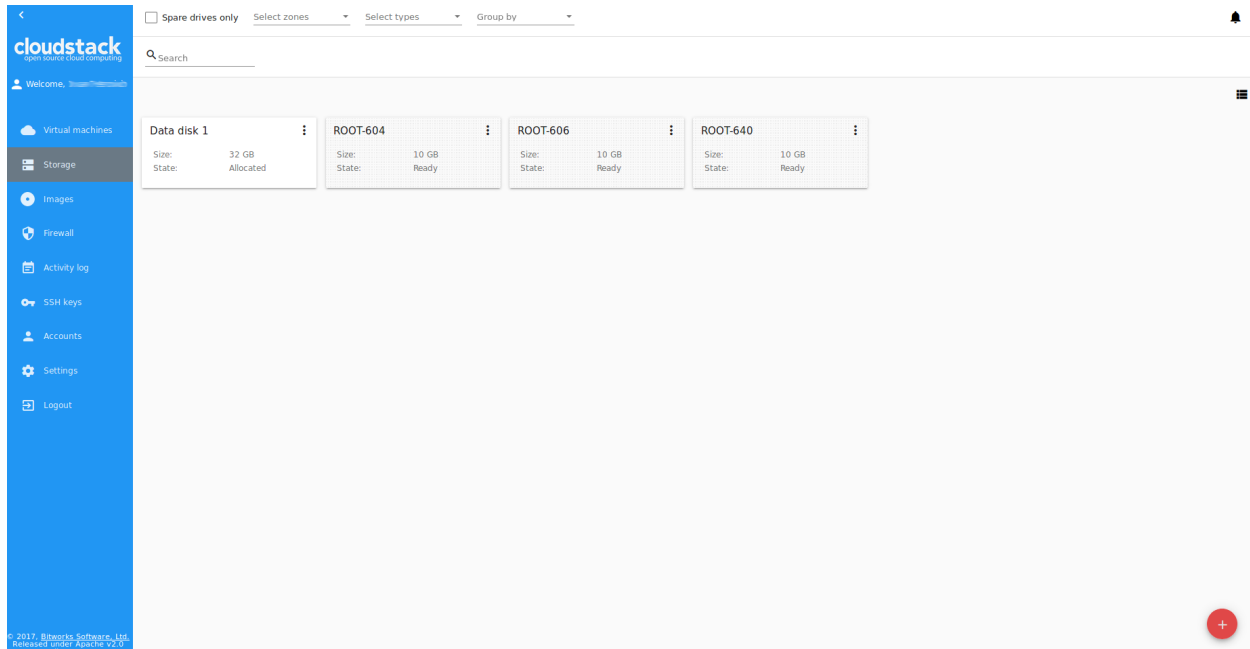Here you can find a list of your disks existing for your user.



Domain Administrator can see disks of all accounts in the domain.

Disks can be viewed as a list or as a grid of cards. Switch the view by clicking a view icon  /  in the upper-right corner.

Note: If you have just started working with CloudStack and you do not have virtual machines yet, you have no disks in the list. Once you create a VM, a root disk is created for it automatically. Creation of an additional disk takes resources and requires expenses. Please, make sure you definitely need an additional data disk.

Filtering of Drives

Root disks are visually distinguished from data disks in the list. There is an option to display only spare disks which allows saving user's time in certain cases.

As in all lists, there is the filtering tool for selecting drives by zones and/or types. You also can apply the search tool selecting a drive by its name or a part of the name.

For better distinguishing of drives in the list you can group them by zones and/or types, like in the figure below:

Domain Administrators can see the list of drives of all accounts in the domain. Filtering by accounts is available to Administrators.

For each drive in the list the following information is presented:

- Drive name,
- Size,
- State - Ready or Allocated.

The screenshot shows the CloudStack Storage page. The left sidebar contains navigation links: Virtual machines, Storage (selected), Images, Firewall, Activity log, SSH keys, Accounts, Settings, and Logout. The main content area displays a grid of storage volumes. At the top, there are filters: "Spare drives only" (checkbox), "Select accounts", "Select zones", "Select types", and "Group by". A search bar is also present. The grid contains the following volumes:

Volume Name	Size	State
Data disk 2	10 GB	Ready
Data disk 1	10 GB	Allocated
Data disk 3	2 GB	Allocated
ROOT-182	16 GB	Ready
ROOT-575	10 GB	Ready
ROOT-593	10 GB	Ready
ROOT-601	8 GB	Ready
ROOT-604	10 GB	Ready
ROOT-606	10 GB	Ready
ROOT-640	10 GB	Ready
ROOT-642	10 GB	Ready
ROOT-643	8 GB	Ready
ROOT-644	10 GB	Ready
ROOT-647	10 GB	Ready
ROOT-648	10 GB	Ready

This screenshot shows the same CloudStack Storage page, but with a red box highlighting the filter area at the top. The filter area includes the "Spare drives only" checkbox, the "Select zones" dropdown, the "Select types" dropdown, and the "Group by" dropdown. The search bar is also visible. The grid of storage volumes is partially visible below the filter area.


This screenshot shows the CloudStack Storage page with the "Group by" dropdown menu open and set to "Types". The main content area is divided into two sections: "Additional Volumes" and "System Volumes".


Additional Volumes

Volume Name	Size	State
Data disk 1	10 GB	Allocated

System Volumes


Volume Name	Size	State
ROOT-604	10 GB	Ready
ROOT-654	10 GB	Ready

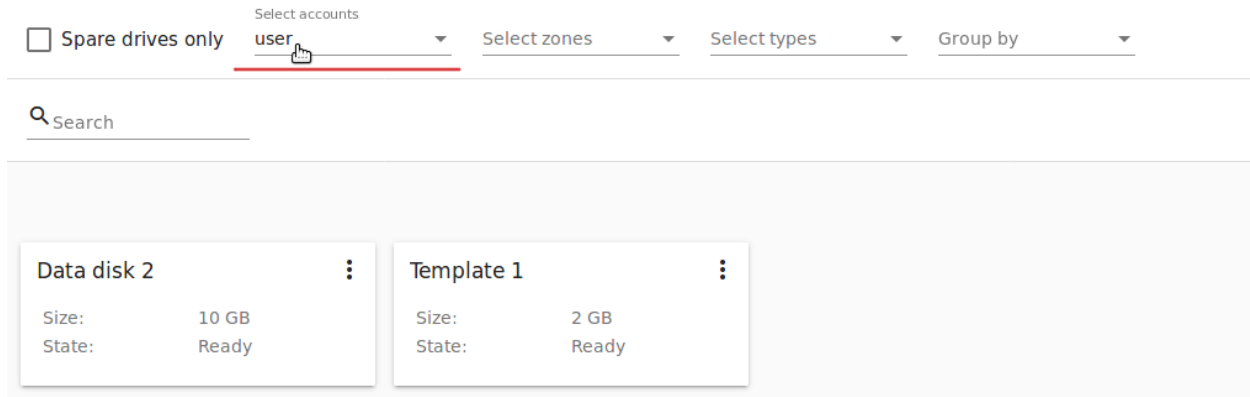

The Actions button  is available to the right. It expands the list of actions for a disk. See the information on actions in the [Volume Action Box](#) section below.

2.3.2 Create New Volume

In the *Storage* section you can create new volumes.

By clicking the “Create” button  in the bottom-right corner you opens a creation form.

If you have just started working with CloudStack and you do not have virtual machines yet, you have no disks in the list. Once you create a VM, a root disk is created for it automatically. Creation of an additional disk takes resources and requires expenses. Please, make sure you definitely need an additional disk. When clicking “Create”, a dialogue window will ask you if you are sure you want to create a drive. Confirm your creation action by clicking “Yes”:

A creation form will appear.

To create a new volume fill in the fields:

Note: Required fields are marked with an asterisk (*).


- Name * - Enter a name of the volume.
- Zone * - Select a zone from the drop-down list.
- Disk offering * - Select from the list of available offerings opening it in a modal window by clicking “Select”. For each disk offering you will see a range of parameters. The following parameters are shown by default:
 - Read rate (MB/s);
 - Write rate (MB/s);
 - Read rate (IO/s);
 - Write rate (IO/s).


More parameters can be added via the [configuration file](#) by an Administrator.

Select a disk offering in the list and click “SELECT”.

If the selected disk offering has a custom disk size (it is set by Administrator), you can change the disk size moving the slider to the volume size you wish.



Click “Create” to save the settings and create the new volume. You will see the drive appears in the list.

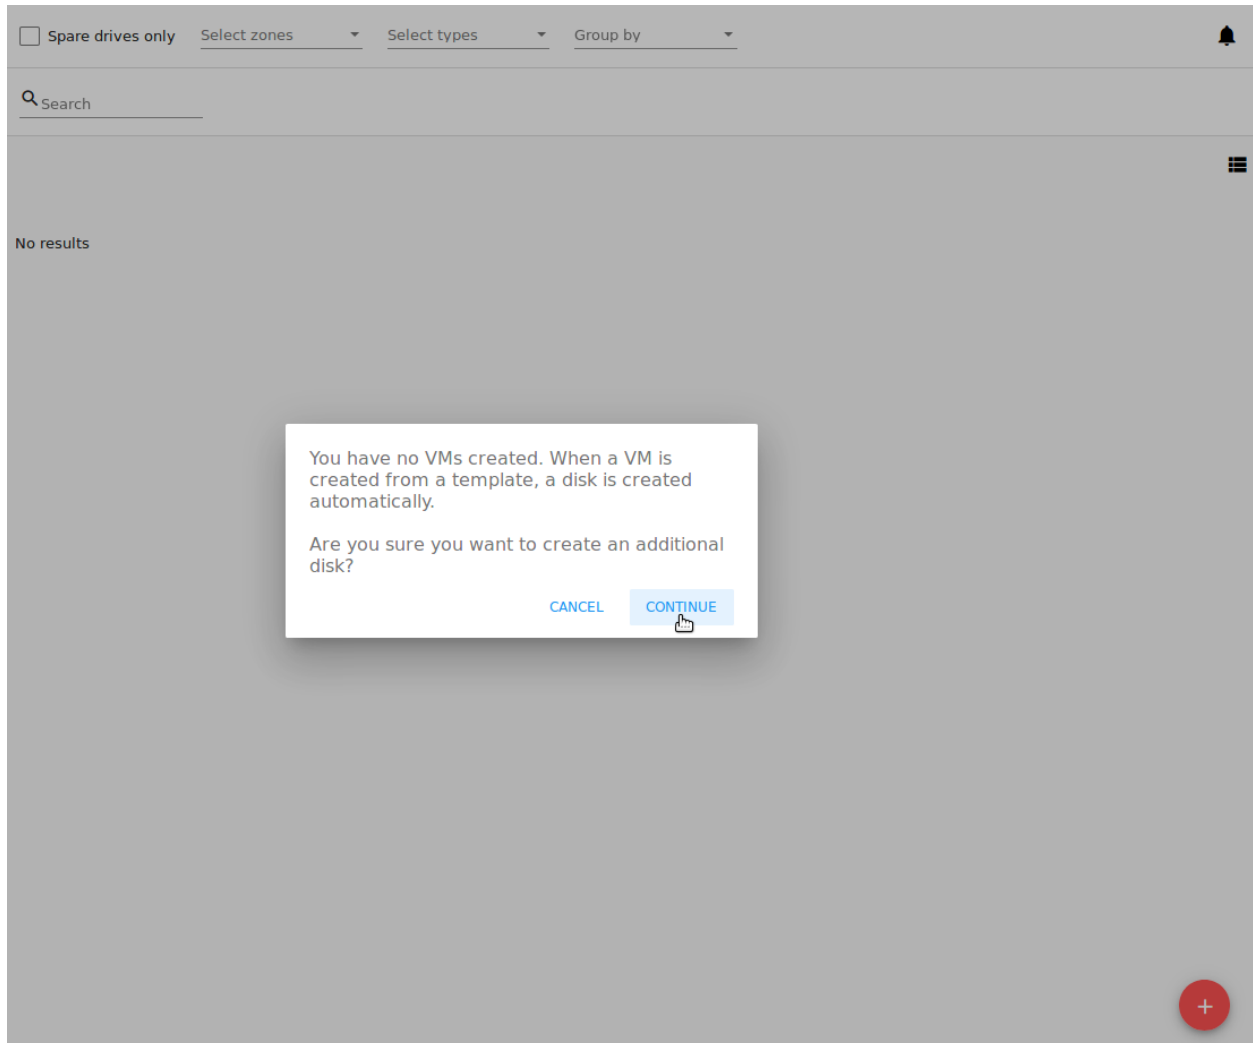

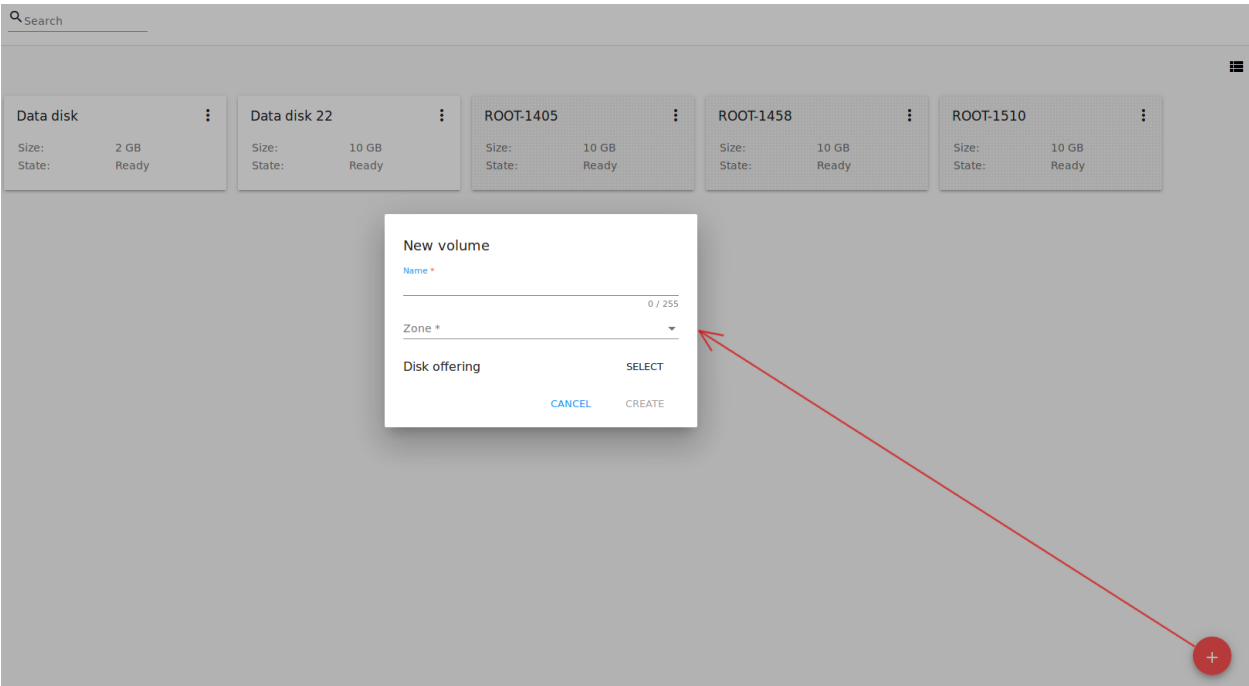

	Read MB/s	Write MB/s	Read IO/s	Write IO/s	Description	
do-1	-	-	-	-	test-description	<input type="radio"/>
test-do-1	-	-	-	-	test offering	<input checked="" type="radio"/>
test-do-2	-	-	-	-	test offering	<input type="radio"/>
test-do-3	-	-	-	-	test-size	<input type="radio"/>


CANCELSELECT

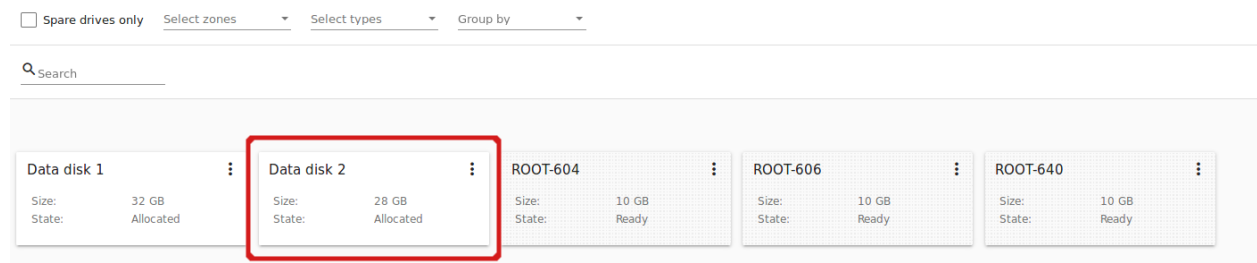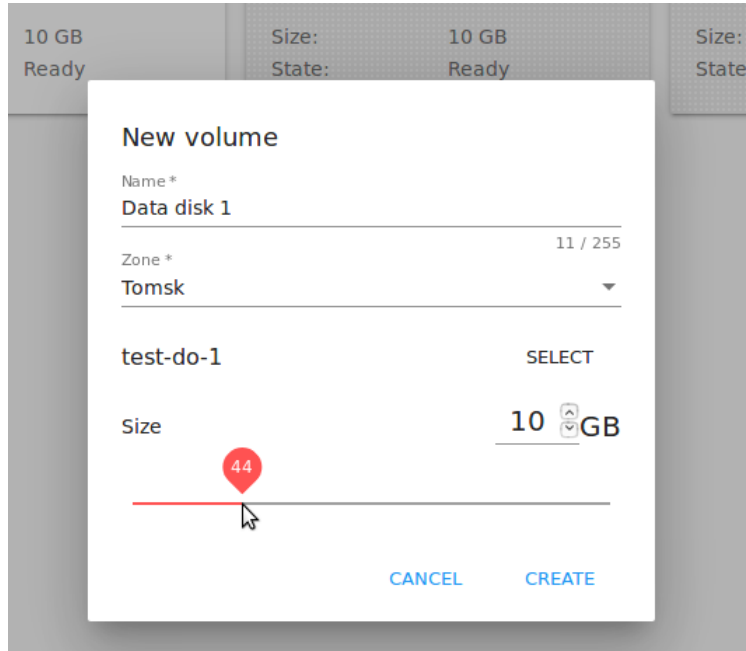

Click “Cancel” to drop all the settings. The drive will not be created then.

2.3.3 Volume Details Sidebar

By clicking a disk in the list you can access the information on the volume.

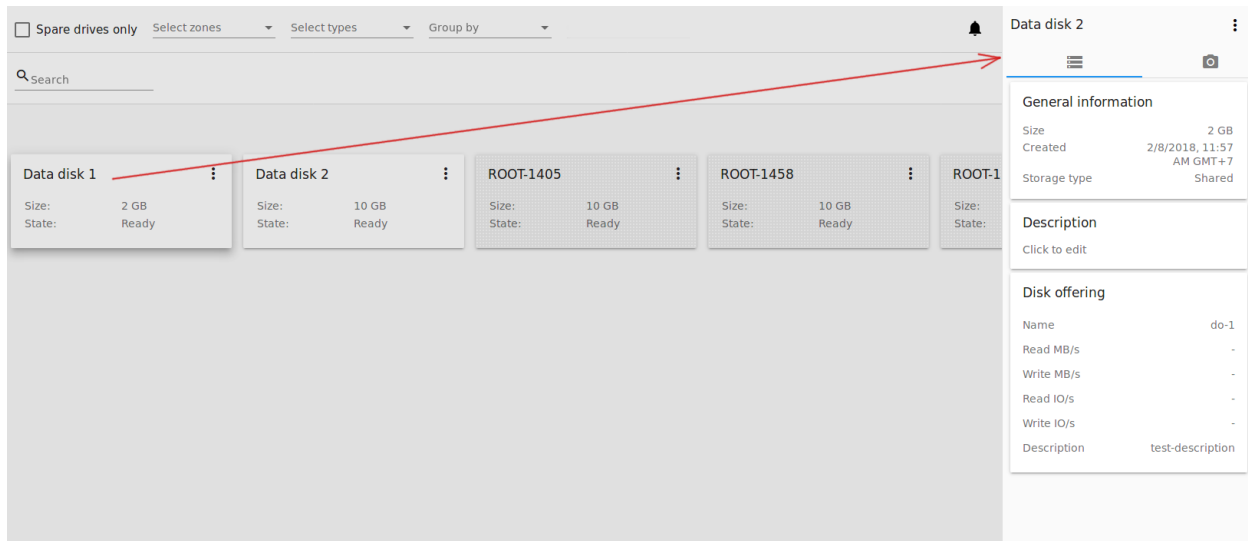

At the right sidebar you can find two tabs:

1. Volume tab - Provides the information on the disk volume:
 - General information - Presents disk size, date and time of creation, the storage type (shared, local).
 - Description - Allows entering a short description to the drive. Click at the Description card and enter a short description in the text block.

Click “Save” to save the description. Description will be saved to volume [tags](#).

You can edit the description by clicking the “Edit” button  in the tab.

- Disk offering - Presents the information on the disk offering chosen at disk creation.
2. Snapshots tab - Allows creating disk snapshots. Snapshots can be taken for disks with the “Ready” status only.

Click the “Add” button  and enter in the dialogue window:

- Name - Define a name for the snapshot. It is auto-generated in the format <date>-<time>. But you can specify any name you wish.
- Description - Add a description of the snapshot to know what it contains.

Then click “Create” and see the snapshot has appeared in the list.

Every snapshot is saved in a separate card. There you will see the name and time of the snapshot.

For each snapshot the list of actions is available. Find more information on snapshot actions in the [Snapshots Action Box](#) section below.

Data disk 2

General information

Size

2 GB

Created

2/8/2018, 11:57 AM GMT+7

Storage type

Shared

Description

Enter text

Short description here|

CANCEL

SAVE

Disk offering

Name

do-1

Read MB/s

-

Write MB/s

-

Read IO/s

-

Write IO/s

-

Description

test-description

Data disk 2

General information


Size	2 GB
Created	2/8/2018, 11:57 AM GMT+7
Storage type	Shared

Description

Short description here

Disk offering

Name	do-1
Read MB/s	-
Write MB/s	-
Read IO/s	-
Write IO/s	-
Description	test-description

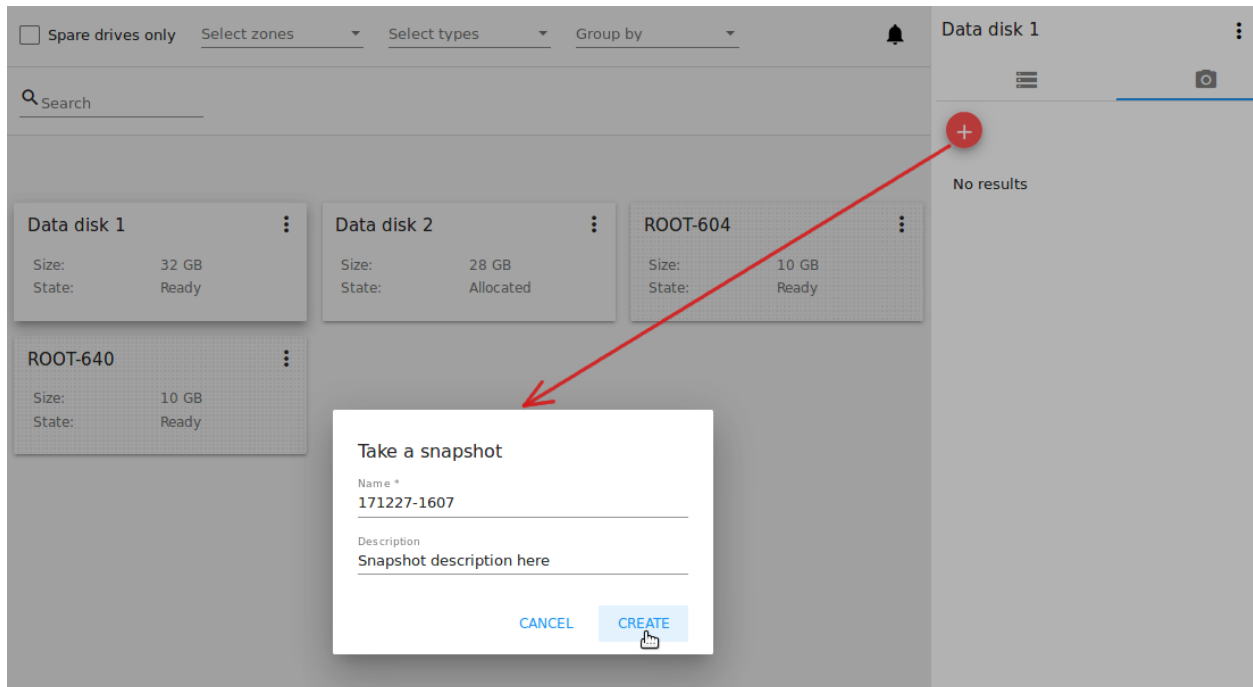

Snapshots Action Box

Like in the Virtual Machine information tab the same actions are available for a snapshot:

- **Create a template** - Allows creating a template from the snapshot. This template can be used for VM creation.

Fill in the form to register a new template:

- Name * - Enter a name of the new template.
- Description * - Provide a short description of the template.
- OS type * - Select an OS type from the drop-down list.
- Group - Select a group from the drop-down list.
- Password enabled - Tick this option if the template has the password change script installed. That means the VM created on the base of this template will be accessed by a password, and this password can be reset.
- Dynamically scalable - Tick this option if the template contains XS/VM Ware tools to support the dynamic scaling of VM CPU/memory.

Note: Required fields are marked with an asterisk (*).



Click “Show additional fields” to expand the list of optional settings. It allows creating a template that requires HVM. Once all fields are filled in click “Create” to create the new template.

- **Create Volume** - Allows creating a volume from the snapshot.


Type a name for a new volume into the Name field in the modal window. Click “Create” to register a new volume.

Click “Cancel” to cancel the volume creation.

- **Revert Volume To Snapshot** - Allows turning the volume back to the state of the snapshot.

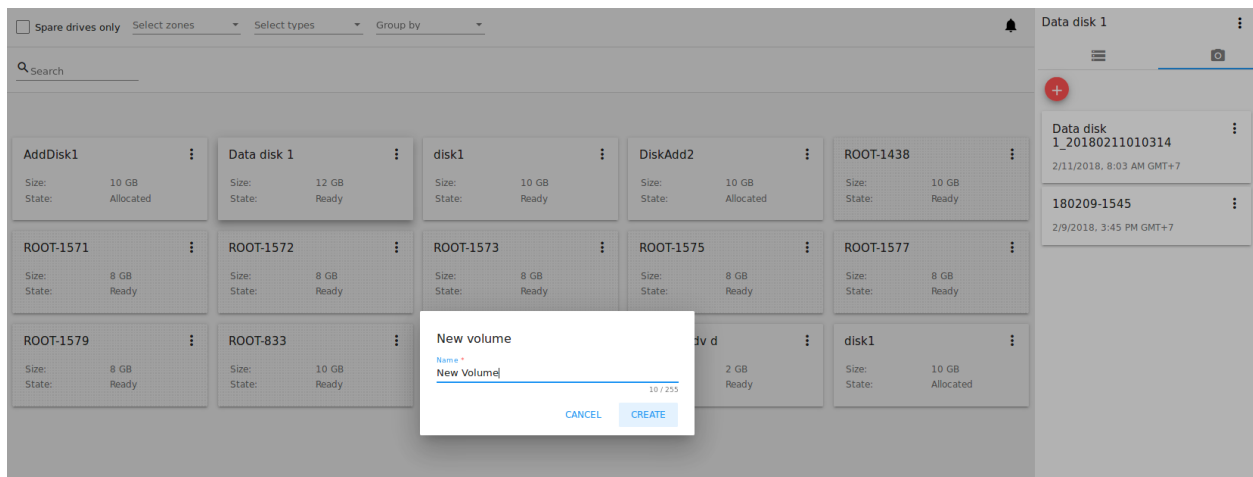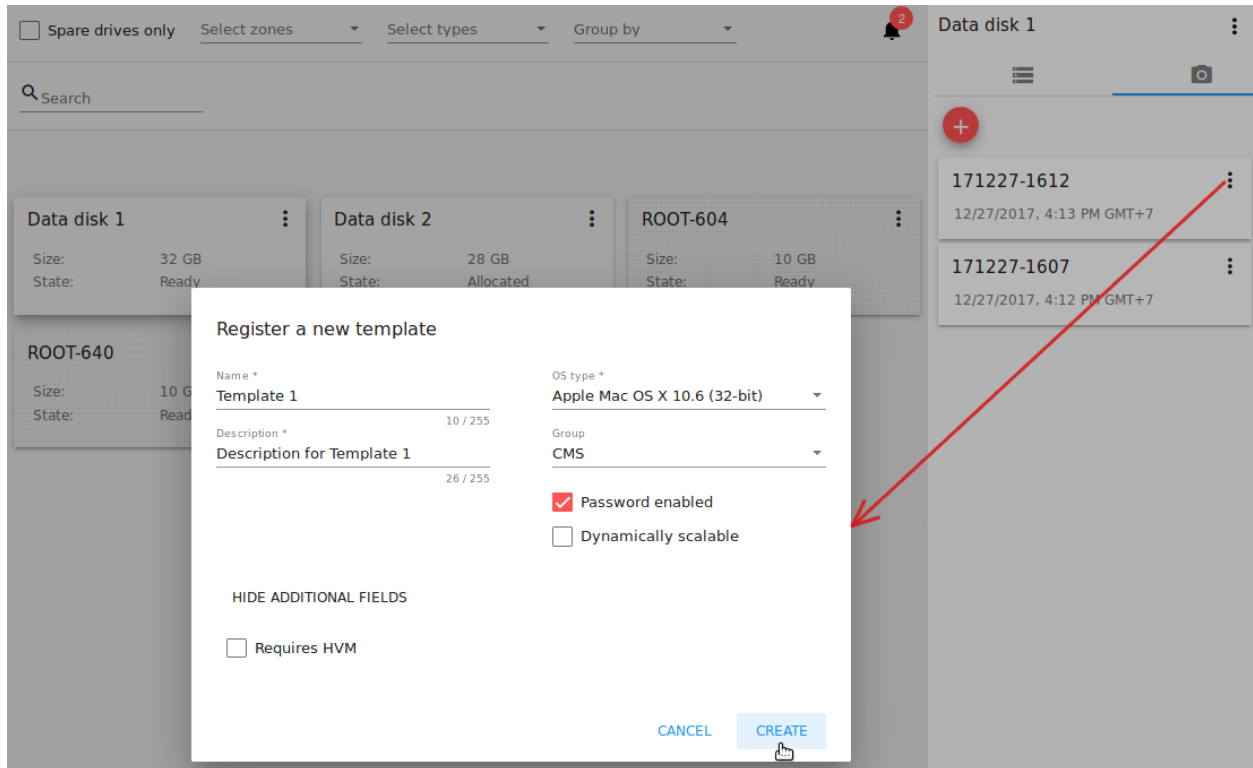


In the dialogue window confirm your action. Please, note, the virtual machine the volume is assigned to will be rebooted.

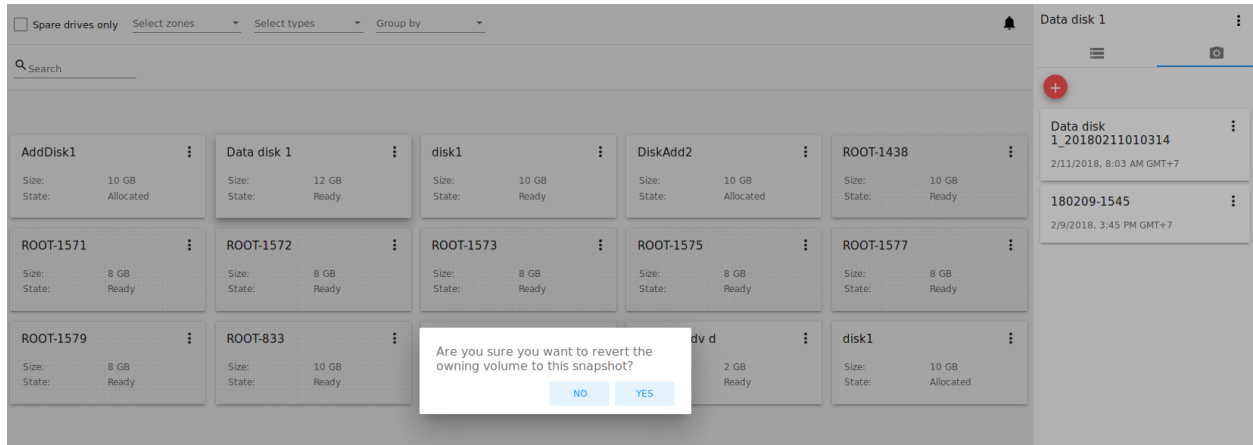

- **Delete** - Allows deleting the snapshot. Click “Delete” in the Action box and confirm your action in modal window. The snapshot will be deleted. Click “Cancel” to cancel the snapshot deleting.

2.3.4 Volume Action Box

Action on drives are available under the Actions button .

The following actions are available on disk:

For root disks:

- Take a snapshot;
- Set up snapshot schedule;
- Resize the disk.

For data disks:

- Take a snapshot;
- Set up snapshot schedule;
- Detach;
- Resize the disk;
- Delete.

Take a snapshot

You can take a snapshot of the disk to preserve the data volumes. Snapshots can be taken for disks with the “Ready” status only.

Click “Take a snapshot” in the disk Actions list and in the dialogue window enter the following information:

- Name of the snapshot * - Define a name for the snapshot. It is autogenerated in the form <date>-<time>. But you can specify any name you wish.
- Description - Add a description of the snapshot to know what it contains.

Note: Required fields are marked with an asterisk (*).

All snapshots are saved in the list of snapshots. For a snapshot you can:

- Create a template;
- Delete the snapshot.

See the [Snapshots Action Box](#) section for more information.

Set up snapshot schedule


This action is available for disks with the “Ready” status only.

You can schedule the regular snapshotting by clicking “Set up snapshot schedule” in the Actions list.

In the appeared window set up the schedule for recurring snapshots:

- Select the frequency of snapshotting - hourly, daily, weekly, monthly;
- Select a minute (for hourly scheduling), the time (for daily scheduling), the day of week (for weekly scheduling) or the day of month (for monthly scheduling) when the snapshotting is to be done;
- Select the timezone according to which the snapshotting is to be done at the specified time;
- Set the number of snapshots to be made.

Click “+” to save the schedule. You can add more than one schedule but only one per each type (hourly, daily, weekly, monthly).

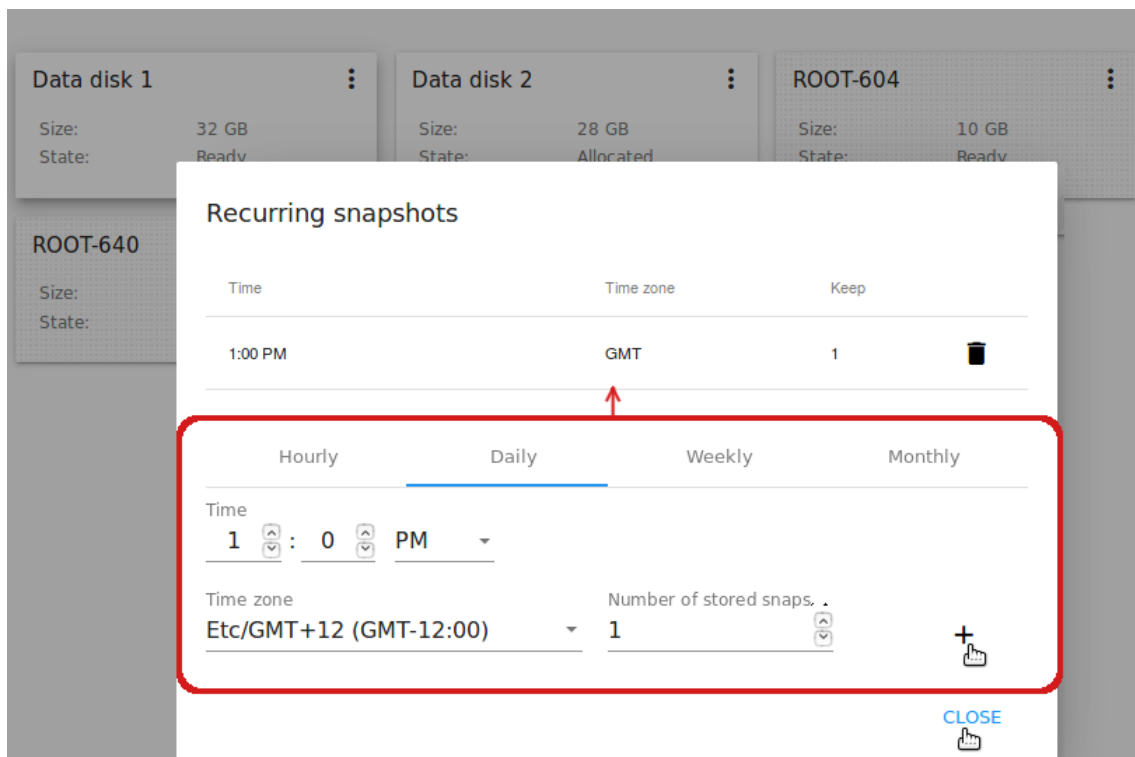


Resize the disk

Note: This action is available to data disks created on the base of disk offerings with a custom disk size. Disk offerings with custom disk size can be created by Root Administrators only.

You can change the disk size by selecting “Resize the disk” option in the Actions list. You are able to enlarge disk size only.

In the appeared window set up a new size and click “Resize” to save the edits.

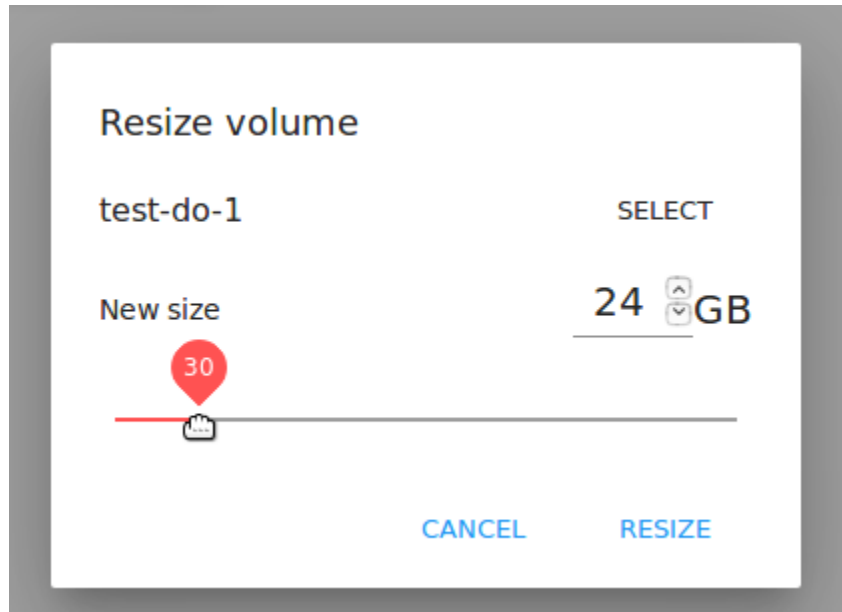

Click “Cancel” to drop the size changes.

Attach/Detach

This action can be applied to data disks. It allows attaching/detaching the data disk to/from the virtual machine.

Click “Attach” in the Actions list and in the dialogue window select a virtual machine to attach the disk to. Click “Attach” to perform the attachment.

An attached disk can be detached. Click “Detach” in the Actions list and confirm your action in the dialogue window. The data disk will be detached from the virtual machine.


Delete

This action can be applied to data disks. It allows deleting the data disk from the system.

Click “Delete” in the Actions list and confirm your action in the dialogue window. If a volume has snapshots the system will ask you if you want to delete them as well. Click “YES” to delete the snapshots of the volume. Click “NO” to keep them.

The data disk will be deleted from the system.

2.4 Images

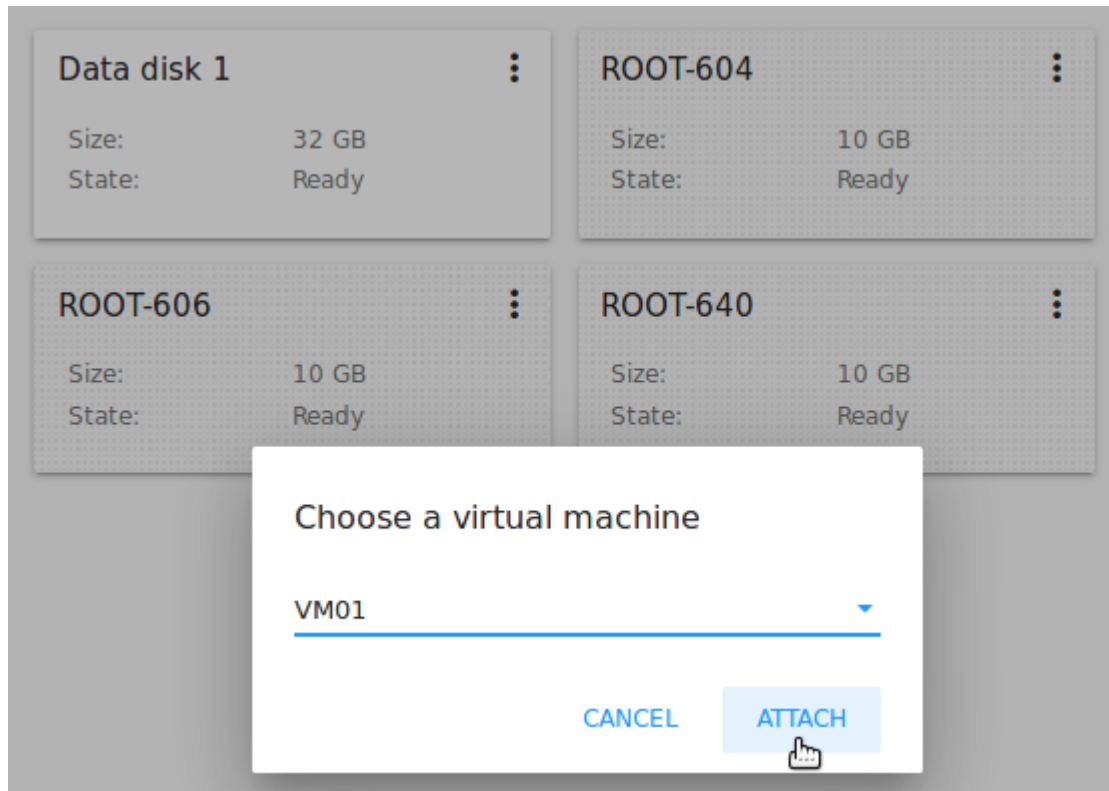

Contents

- *Images*
 - *Images List*
 - * *Filtering of Images*
 - *Create Template*
 - *Create ISO*
 - *Template/ISO Details Sidebar*
 - *Template/ISO Action Box*

In the *Images* section, you can manage Templates and ISO files that are used as installation sources for VMs.


A template is a reusable configuration for virtual machines. When users create a VM, they can choose from a list of templates. Administrators and users can create new templates and add them to CloudStack.

ISO files are another installation source for virtual machines.


You can switch from Templates to ISOs by selecting a corresponding option above:

2.4.1 Images List

Existing templates/ISOs are presented in the list in the “Images” section. A user can see the templates/ISOs belonging to his/her user only. Domain Administrator can see templates/ISOs of all users in the domain but cannot perform actions on other users’ templates.

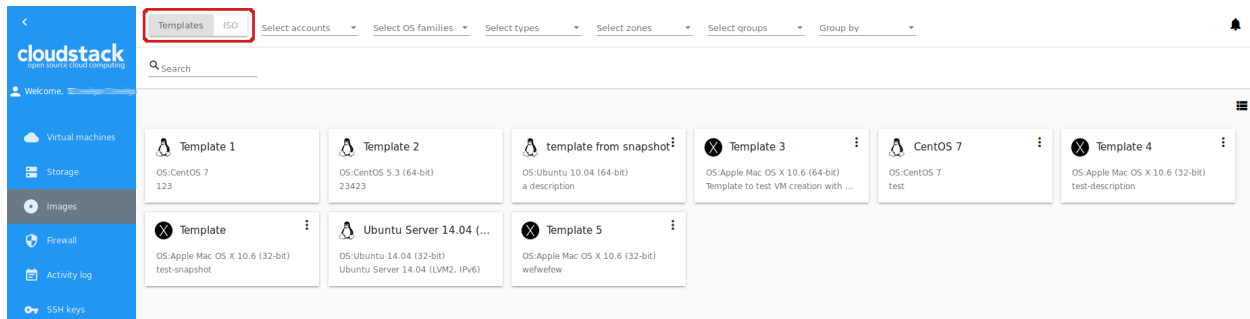


You can switch the list view of templates/ISOs to the box view using the view button  in the upper-right corner.

For each template/ISO in the list, you can see its name, OS family, description. The Actions button  expands the list of actions. Actions are available to those templates/ISOs that belong to your user only (corresponding to “My” type). Administrators can see templates/ISOs of all users in the domain, but cannot manage them.

Filtering of Images

The list of templates/ISOs can be filtered using the filtering tool. The filtering parameters are as follows:

- Accounts (for Domain Administrators);
- OS families;
- Types;
- Zones;
- Groups.

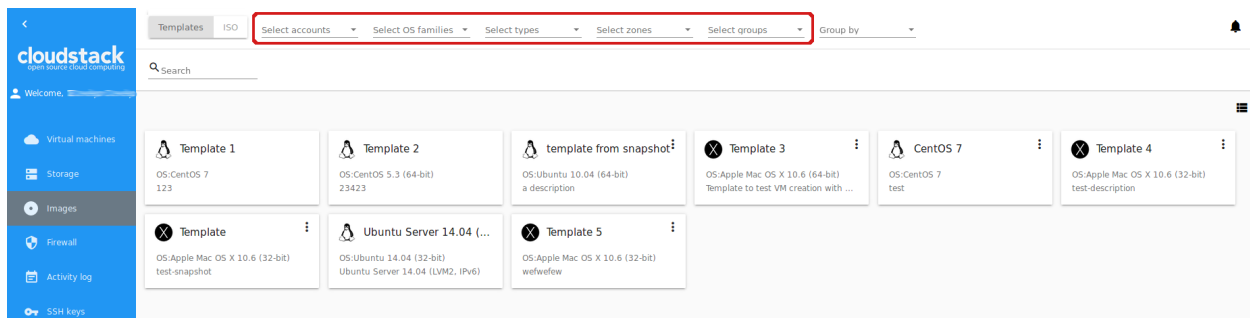



Besides, you can adjust the list view using the grouping tool. Templates/ISOs can be grouped by zones or/and groups. Administrators can group the list by accounts.


Use the search tool to easily find a template/ISO by its name or by a part of the name.

2.4.2 Create Template

There is a variety of ways to add more templates to the system. In the *VM Details Sidebar* section, we have described one way of template creation from a VM volume snapshot in the “Storage” tab of the VM information sidebar (see *Snapshot Action Box*). From the *Volume Details Sidebar* of the “Storage” section, you also can create a template on the base of the volume snapshot (see *Snapshots Action Box*).

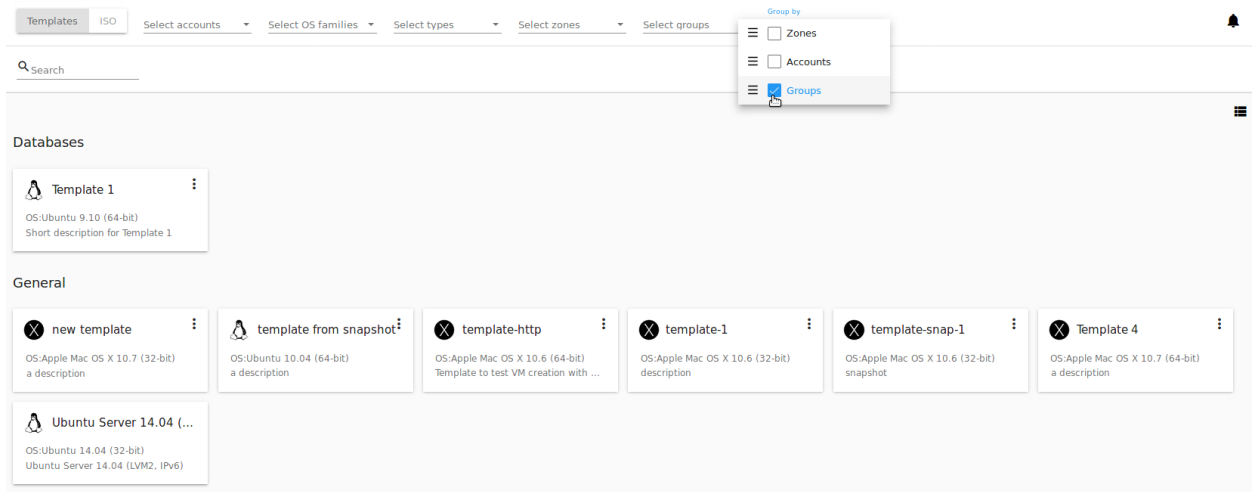

One more way to create a new template is filling in the form in the *Images* section by clicking “Create”  in the bottom-right corner.

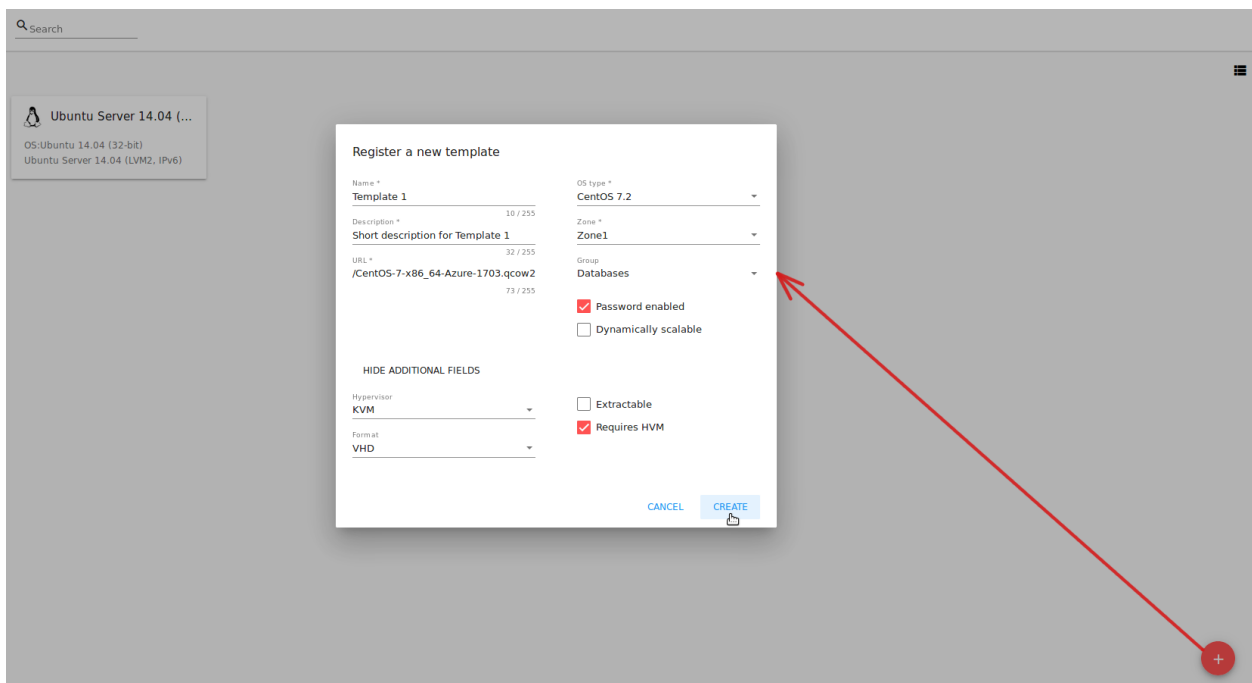

It will open a creation form where you should specify the following information:

1. Name * - Enter a name for the new template.
2. Description * - Provide a short description to have a general idea about the template.
3. URL * - Specify a valid URL of the template file.
4. OS type * - This helps CloudStack and the hypervisor perform certain operations and make assumptions that improve the VM performance. Select from the drop-down list the necessary option, or select “Other” if there is no needed option in the list.
5. Zone * - Choose the zone where you want the template to be available.

6. Group - Select a group from the drop-down list. The list of groups is managed by Administrator in the [configuration file](#). The group assigned to a template is saved to template tags with the `csui.template.group` tag. The group can be edited or deleted from the [Template/ISO Details Sidebar](#) from the “Template” tab or by editing or deleting the corresponding tag in the “Tags” tab.
7. Password enabled checkbox - Tick this option if your template has the CloudStack password change script installed. That means the VM created on the base of this template will be accessed by a password, and this password can be reset.
8. Dynamically scalable checkbox - Tick this option if the template contains XS/VM Ware tools to support dynamic scaling of VM CPU/memory.

Note: Required fields are marked with an asterisk (*).

9. “Show additional fields” allows expanding the form and set more settings:
 - Hypervisor - Select a hypervisor from the drop-down list.
 - Format - The format of the template upload file, e.g. VHD or RAW or VMDK.
 - Extractable - Tick this option if the template is available for extraction. If this option is selected, end-users can download a full image of a template.
 - Requires HVM - Tick this option for creating a template that requires HVM.

Once all fields are filled in, click “Create” to create the template with these settings. The created template will appear in the list.

Click “Cancel” to close the form without template creation. All fields will be cleared.

2.4.3 Create ISO



You can create a new ISO file in the *Images* section by clicking “Create” in the bottom-right corner.

It will open a creation form where you should specify the following information:

1. Name * - Enter a name for the new ISO file.
2. Description * - Provide a short description to have a general idea about the ISO file.
3. URL * - Specify a valid URL of the ISO file.
4. OS type * - This helps CloudStack and the hypervisor perform certain operations and make assumptions that improve the VM performance. Select from the drop-down list the necessary option, or select “Other” if there is no needed option in the list.
5. Zone * - Choose the zone where you want the ISO file to be available.
6. Group - Select a group from the drop-down list. The list of groups is managed by Administrator in the [configuration file](#). The group assigned to ISO is saved to ISO tags with the `csui.template.group` tag. The group can be edited or deleted from the [Template/ISO Details Sidebar](#) from the “Template” tab or by editing or deleting the corresponding tag in the “Tags” tab.

Note: Required fields are marked with an asterisk (*).

7. “Show additional fields” allows expanding the form and set more settings:

- Extractable - Tick this option if the ISO file is available for extraction. If this option is selected, end-users can download a full image of an ISO file.
- Bootable - Tick this option to indicate whether the machine can be booted using this ISO.

Once all fields are filled in, click “Create” to create the ISO file with these settings. The created ISO file will appear in the list.

Click “Cancel” to close the form without ISO creation. All fields will be cleared.

The created ISO will appear in the list.


2.4.4 Template/ISO Details Sidebar


The information on each template/ISO is presented in the sidebar to the right. It is opened by clicking the template/ISO card or line in the list. The information is presented here in 3 tabs. Above the tabs you can see the template/ISO general information:


- Name - Template/ISO name and symbol,
- Actions button - Actions list allowing the Delete action.

1. Template tab:

- Description - Template/ISO description provided at its creation.
- OS - The OS selected for this template/ISO.
- General Information - The settings saved for this template/ISO: size, creation date, type, hypervisor, other settings.

- URL - The URL provided for this template/ISO. Next to it you can see the “Copy” icon . Click it to copy the URL to clipboard and then paste it in the address line.

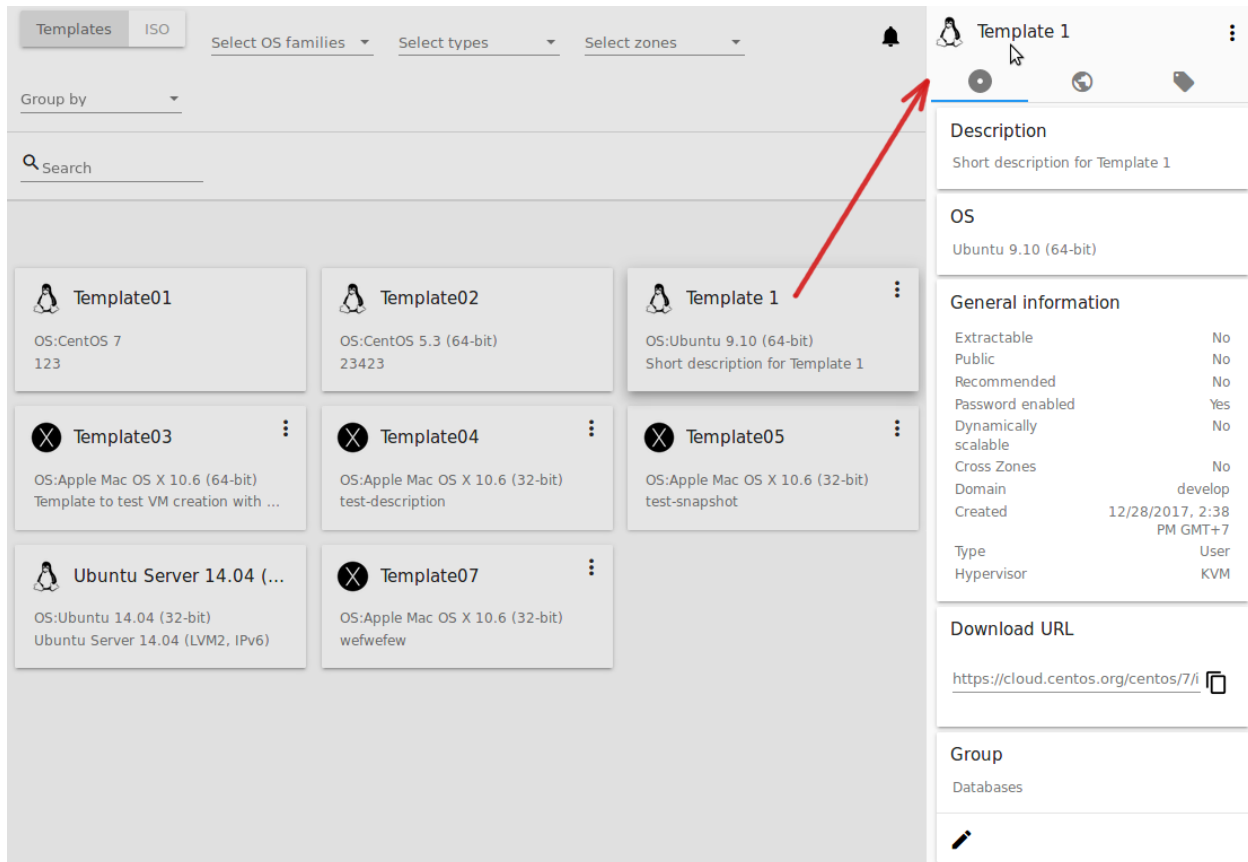

- Group - Template/ISO group. You can change the group by clicking “Edit” . Choose an existing group in the appeared window and click “ASSIGN” to assign the template/ISO to the selected group.

From this window, you can remove the template/ISO from the group. Select the “Remove from the group <group name>” option and click “REMOVE”.

2. Zones tab - Shows the zone where the template/ISO is available. If the zone has “Yes” for the *Ready* status, the template/ISO can be used for VM creation.
3. Tags tab - Presents the list of tags assigned to the template/ISO.



Tags can be system or non-system. System tags are used to provide the functionality from the user interface perspective. Changing these tags affects the functionality of the application. The “Show system tags” checkbox allows to view or hide system tags of the template. Hiding system tags helps to avoid accidental unwanted changes. If a user has disabled displaying of these tags, the system will remember it and next time tags will also be hidden. Uncheck the “Show system tags” checkbox to hide system tags from the list.



The following system tags can be used for templates/ISOs:


- `csui.template.group` - Used to assign a template/ISO to a group.
- `csui.template.download-url` - Used for URL, if any provided for the template/ISO.

Note: Please, see the [list of tags](#) to find system tags that can be used for a template/ISO.

To find the tag you are interested in, please, use the search tool above the tag list. You can enter a name or a part of the tag name to distinguish it in the list.

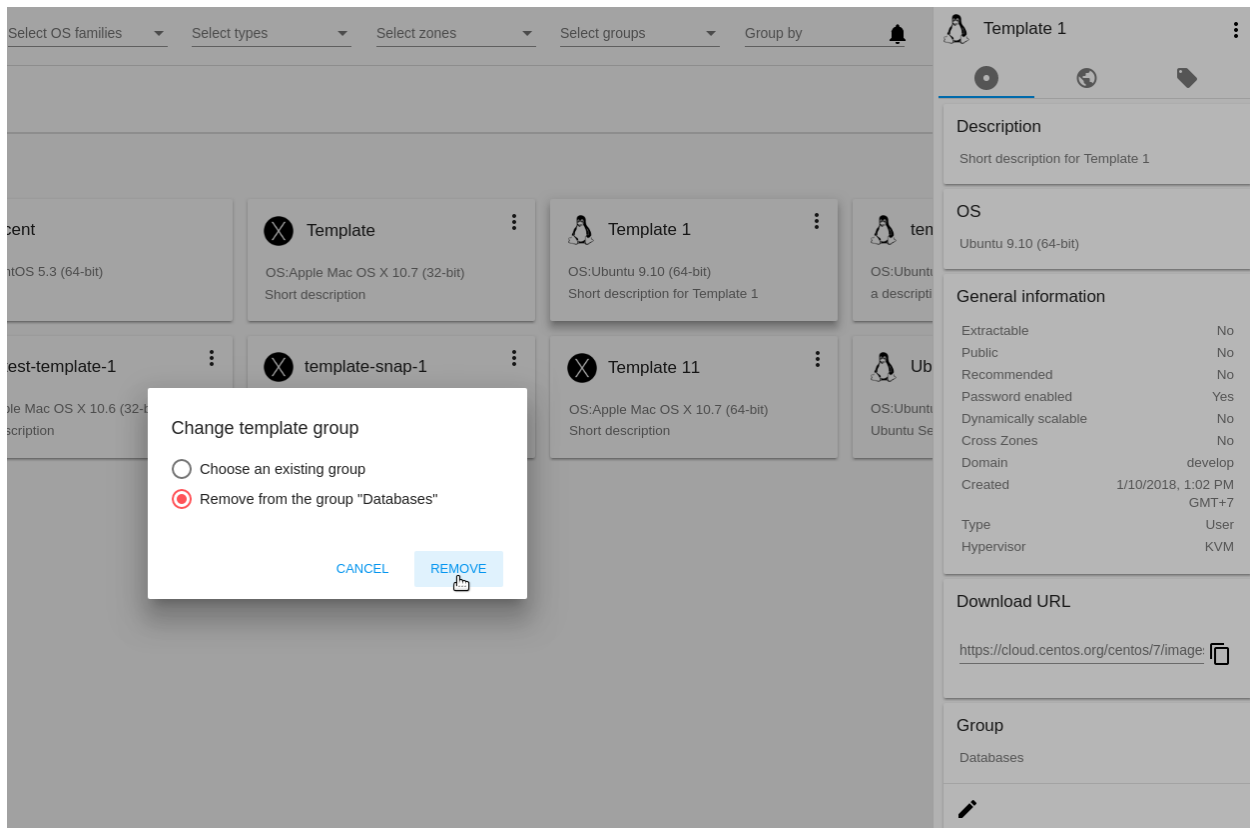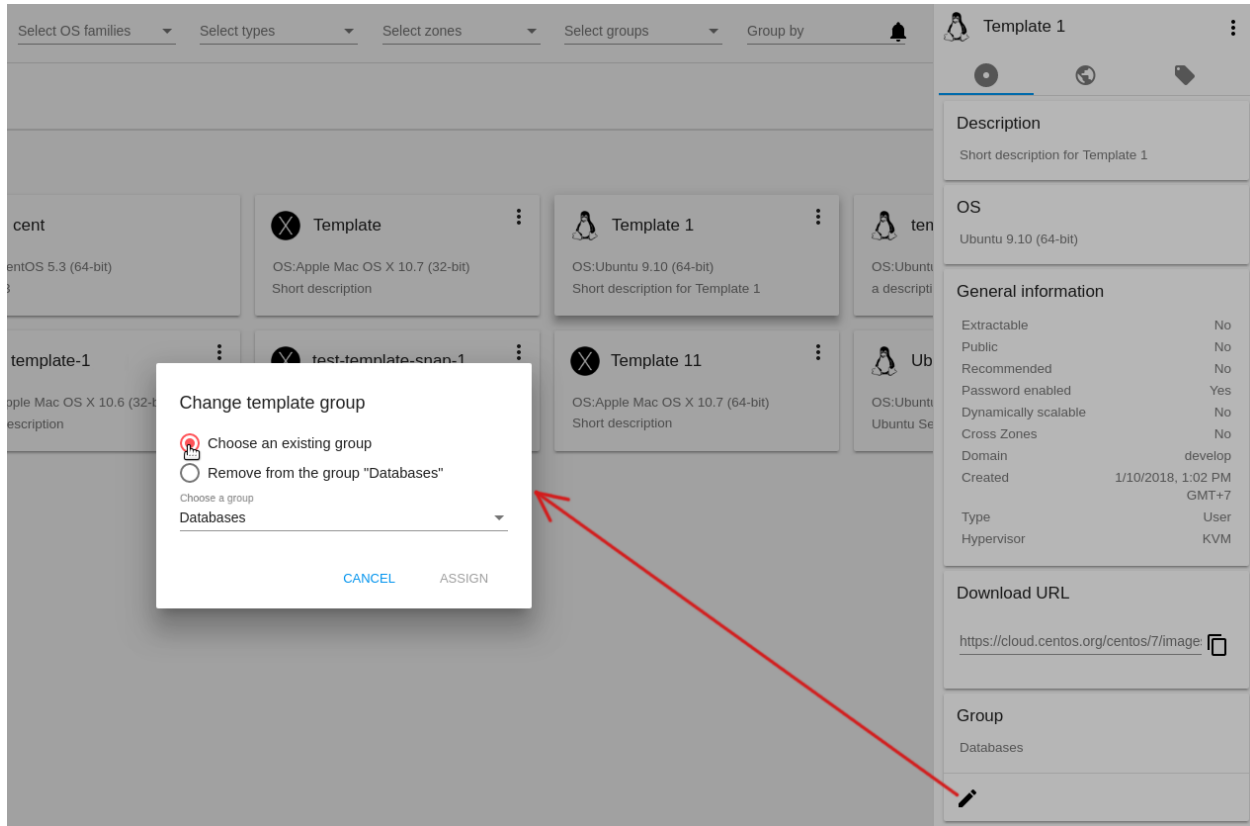

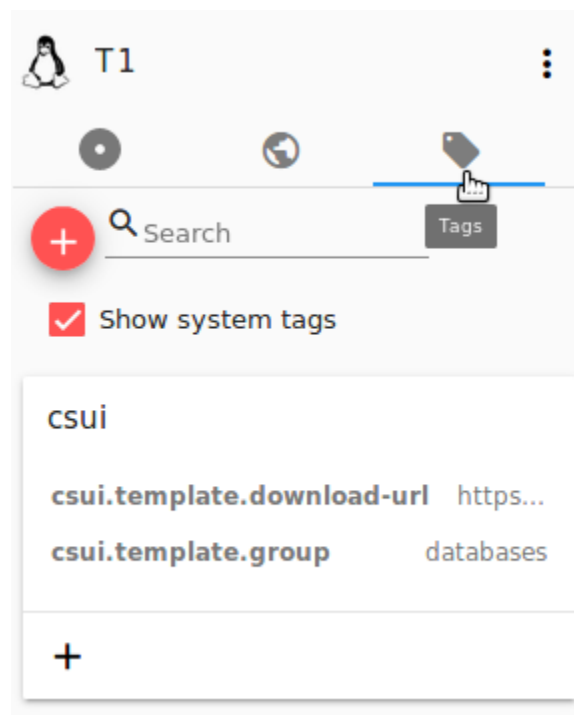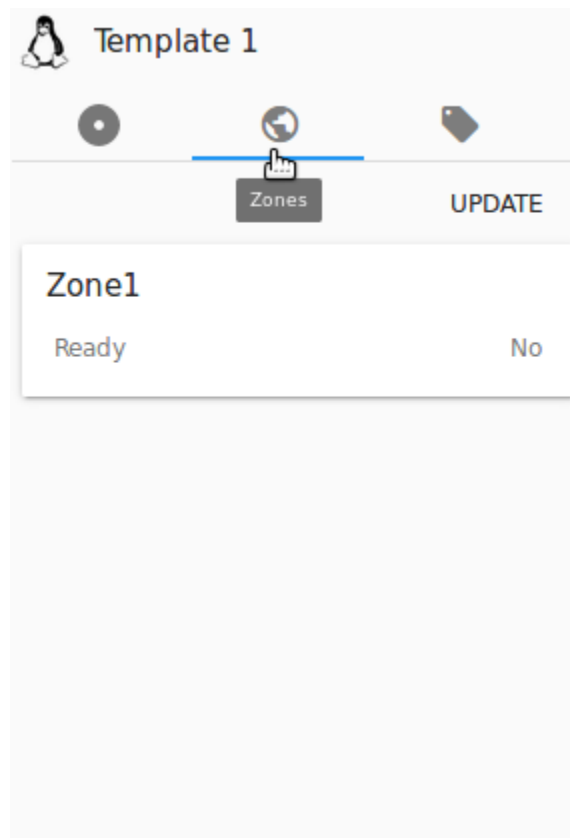


To add a tag for the template/ISO click “Create” . In the appeared form enter:

- Key *
- Value *

Note: Required fields are marked with an asterisk (*).

Click “Create” to assign a new tag to the template/ISO.

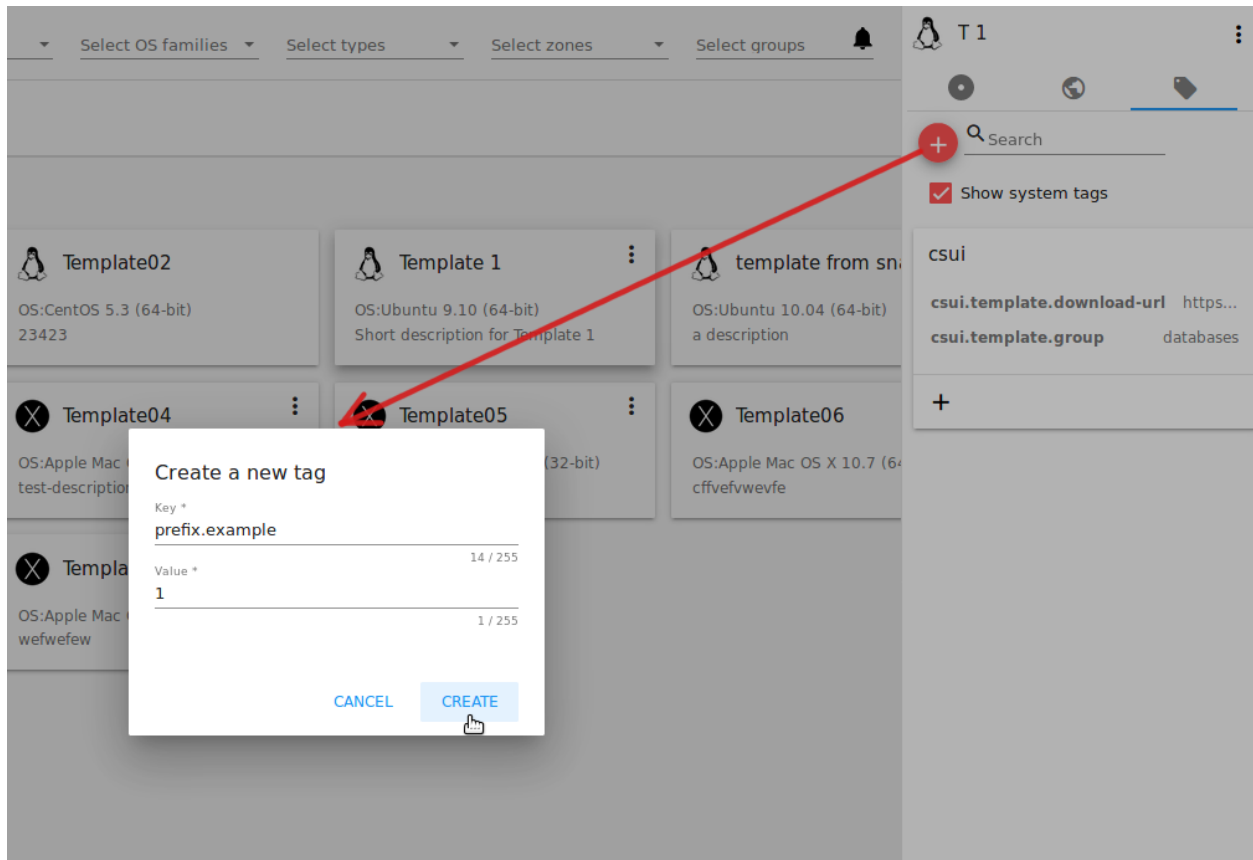



When adding a system tag, click “+” in the card to open the creation form. You will see that the `csui` prefix is automatically prepopulated here.


If you create a non-system tag, it will be saved in a new card. If you have entered a key in the format `<prefix>.<example>`, a card will be named as “`<prefix>`”. When creating a new tag from this card, click “+” in the card and in the tag creation form the *Key* field will be prepopulated with the `<prefix>`.

Tags can be edited or/and deleted. Mouse over the tag in the list and see “Edit” and “Delete” buttons.


Click “Edit” to change the tag’s key or value in the appeared form. Save the edits.


Click “Delete” to delete the tag from the list for this template. Confirm your action in the dialogue window. Make sure the tag disappeared from the list of assigned tags.

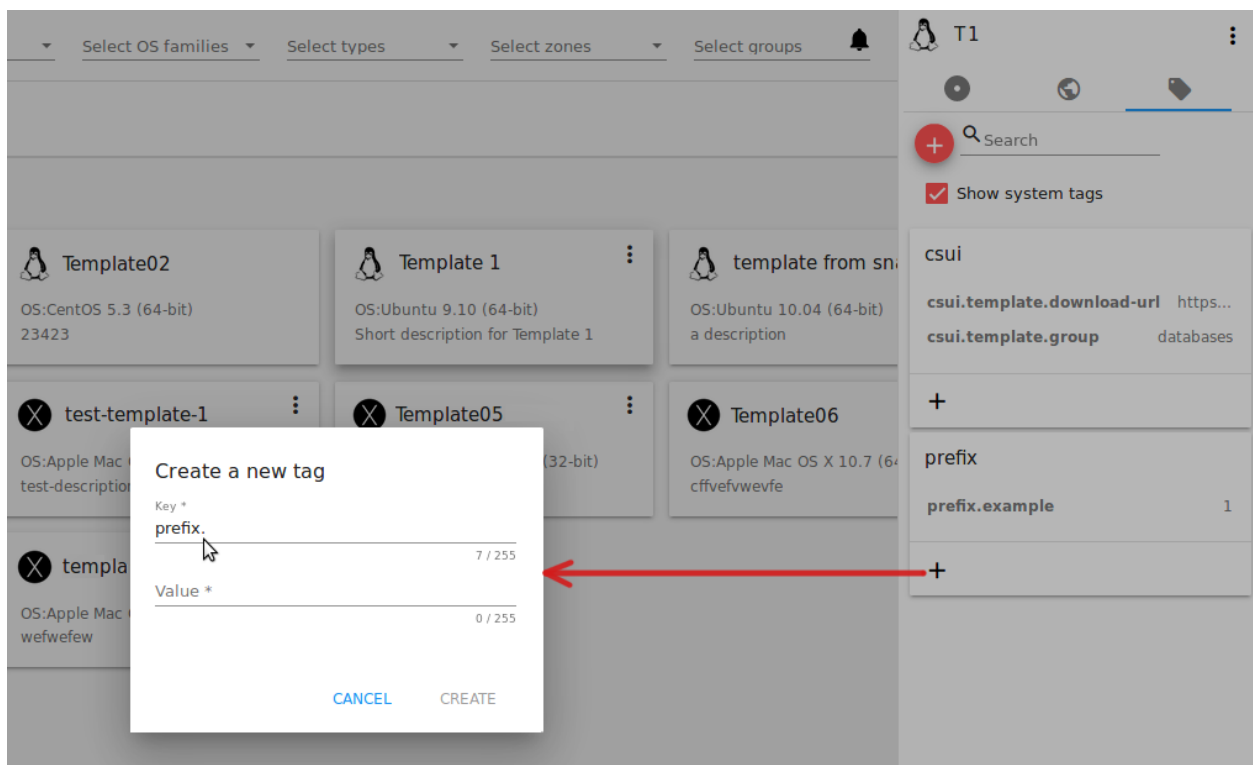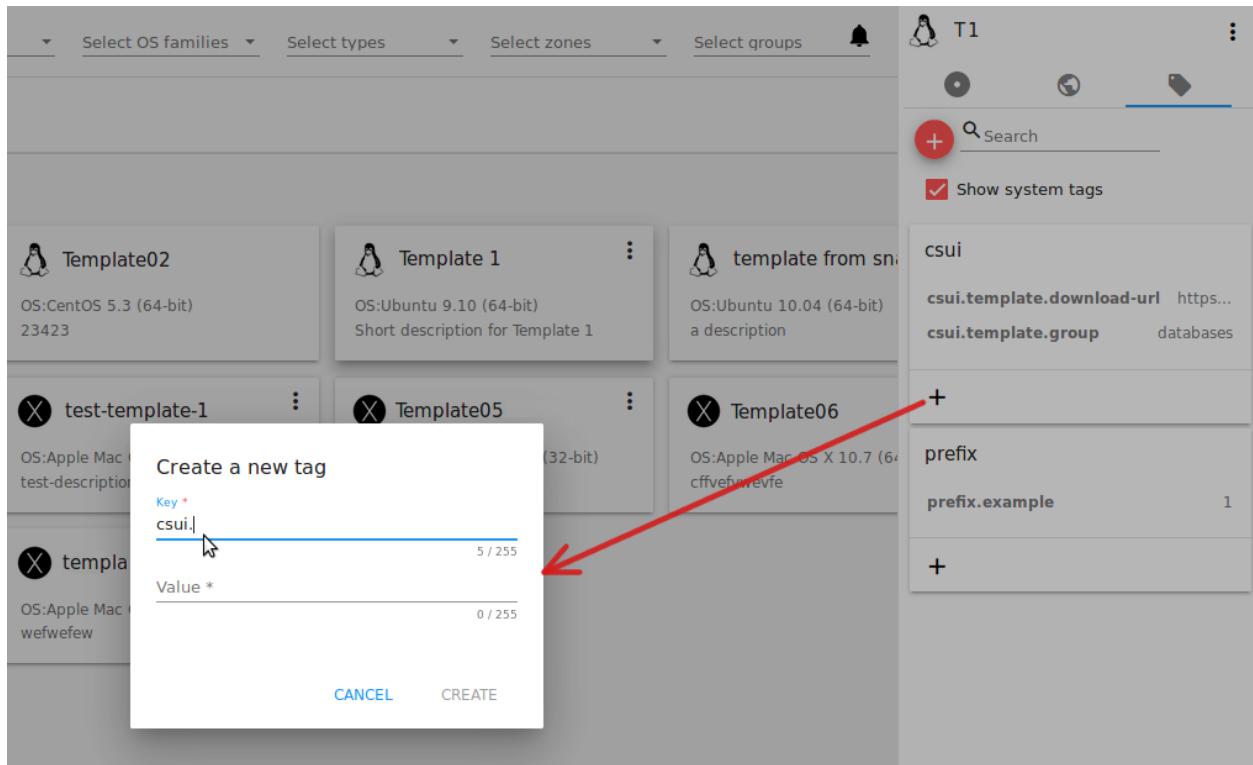

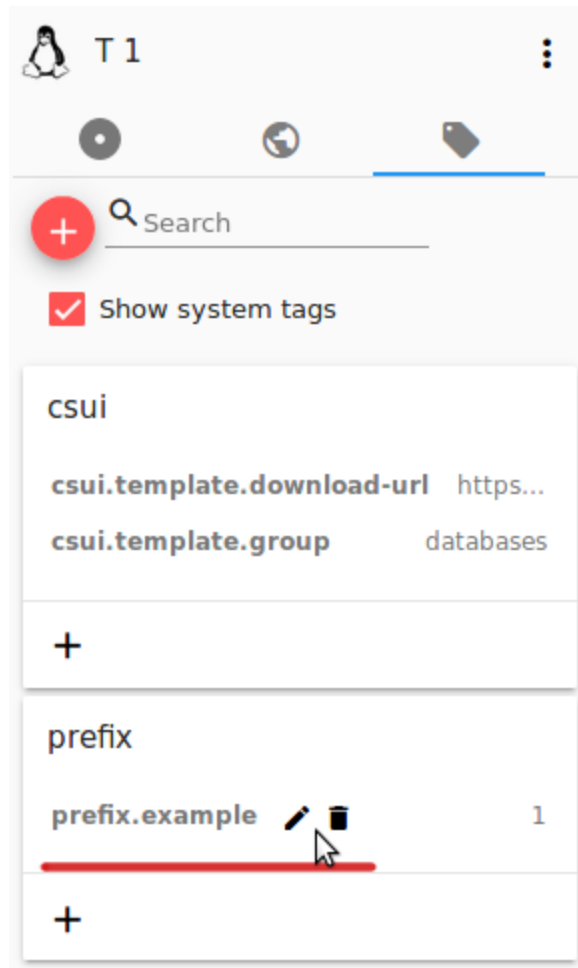

2.4.5 Template/ISO Action Box

By clicking “Actions”  you can expand the list of actions for those templates/ISO that belong to your user only (corresponding to “My” type). The deleting action is available here.

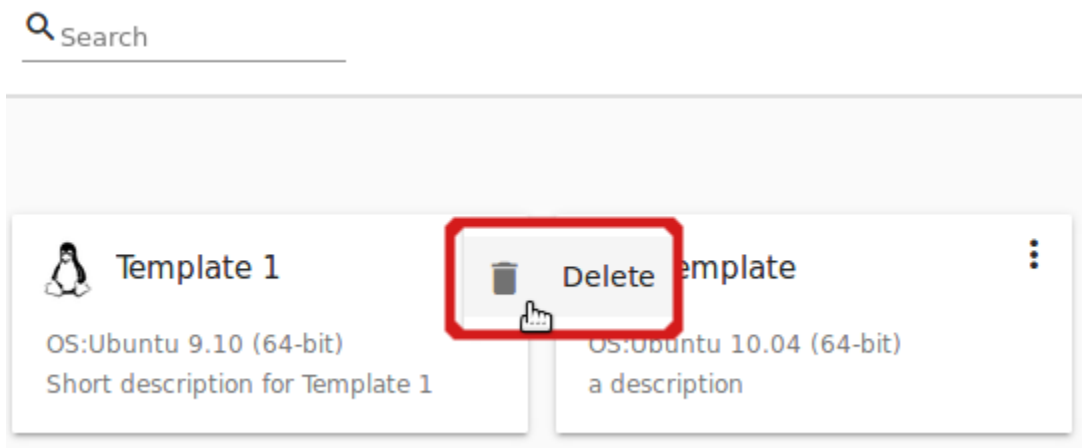

Click “Delete” to delete the template/ISO and then confirm your action in the dialogue window. The template/ISO will be deleted.



Click “Cancel” to close the window without deleting a template/ISO.

2.5 Snapshots

Contents
<ul style="list-style-type: none">• <i>Snapshots</i><ul style="list-style-type: none">– <i>Snapshots List</i><ul style="list-style-type: none">* <i>Filtering of Snapshots</i>– <i>Snapshot Details Sidebar</i>– <i>Snapshot Actions Box</i>

The *Snapshots* section contains the information on snapshots existing in the system.

2.5.1 Snapshots List

The list of snapshots can be presented in the box view or in the list view. Change the view using  /  button.

Filtering of Snapshots

Filtering of snapshots is available above the list.

You can filter the list by the following parameters:

cloudstack
open source cloud computing

Welcome, [View Profile](#)

- Virtual machines
- Storage
- Images
- Snapshots**
- Firewall
- Activity log
- SSH keys
- Accounts
- Settings
- Logout

Select types Group by Select a date

Search

180212-1404 Volume: Deleted Created: 2/12/2018, 2:04 PM GMT...	180212-1402 Volume: Deleted Created: 2/12/2018, 2:02 PM GMT...	180212-1352 Volume: Deleted Created: 2/12/2018, 1:52 PM GMT...	180212-1351 Volume: ROOT-833 Created: 2/12/2018, 1:51 PM GMT...	180212-1351 Volume: ROOT-1438 Created: 2/12/2018, 1:51 PM GMT...
180212-1351 Volume: ROOT-1438 Created: 2/12/2018, 1:51 PM GMT...	180212-1351 Volume: ROOT-1438 Created: 2/12/2018, 1:51 PM GMT...	180212-1200 Volume: ROOT-1562 Created: 2/12/2018, 12:00 PM GMT...	180212-1159 Volume: ROOT-1562 Created: 2/12/2018, 11:59 AM GMT...	180212-1151 Volume: ROOT-1562 Created: 2/12/2018, 11:51 AM GMT...
180212-1117 Volume: Deleted Created: 2/12/2018, 11:17 AM GMT...				

Select accounts Select types Group by Select a date

Search

180212-1404 Volume: Deleted Created: 2/12/2018, 2:04 PM GMT...	180212-1402 Volume: Deleted Created: 2/12/2018, 2:02 PM GMT...	180212-1352 Volume: Deleted Created: 2/12/2018, 1:52 PM GMT...	180212-1351 Volume: ROOT-833 Created: 2/12/2018, 1:51 PM GMT...	180212-1351 Volume: ROOT-1438 Created: 2/12/2018, 1:51 PM GMT...
180212-1351 Volume: ROOT-1438 Created: 2/12/2018, 1:51 PM GMT...	180212-1351 Volume: ROOT-1438 Created: 2/12/2018, 1:51 PM GMT...	180212-1200 Volume: ROOT-1562 Created: 2/12/2018, 12:00 PM GMT...	180212-1159 Volume: ROOT-1562 Created: 2/12/2018, 11:59 AM GMT...	180212-1151 Volume: ROOT-1562 Created: 2/12/2018, 11:51 AM GMT...
180212-1117 Volume: Deleted Created: 2/12/2018, 11:17 AM GMT...				


- by Accounts (for Administrators);
- by Type - Hourly, Daily, Weekly, Monthly, Manual depending on the schedule of snapshotting.
- by Creation Date - Select a date using a date picker.

Group snapshots by accounts (available for Administrators) and/or by type.

The searching tool allows to find a snapshot by:


- its name or a part of the name;
- snapshot description.

For each snapshot in the list the following information is presented:

- State bullet - green for backed up, red for any error behavior, yellow for creating, grey for allocated.
- Name of the snapshot.
- Volume the snapshot is created for.
- Date and time of creation
- Actions button .

2.5.2 Snapshot Details Sidebar

A details sidebar presents the information on a snapshot. It appears to the right by clicking a snapshot in the list.

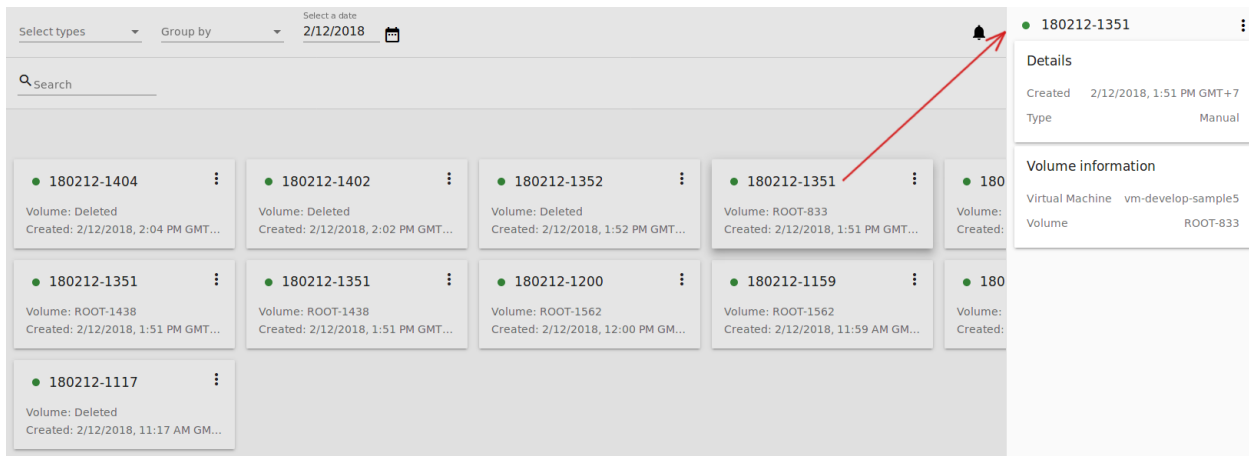

The following information is presented in the details sidebar:


- Date and time of creation;
- Type - Presents the snapshot type;
- Volume information and a virtual machine it is assigned to.

2.5.3 Snapshot Actions Box

The following actions are available for snapshots:

- Create template;
- Create volume;

- Revert volume to snapshot;
- Delete.

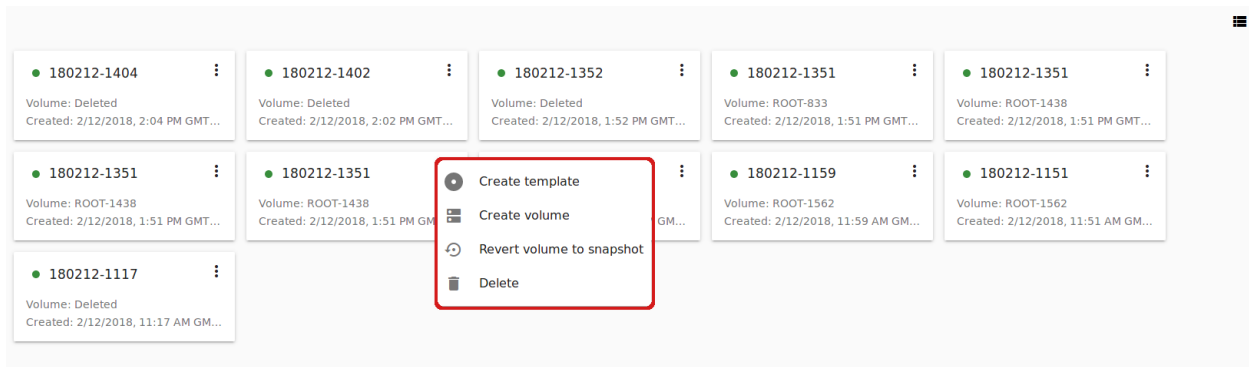

Below you will find details for each action.

Create Template

Open a creation form to register a new template from the snapshot.

Fill in the fields:

- Name * - Enter a name of the new template.
- Description * - Provide a short description of the template.
- OS type * - Select an OS type from the drop-down list.
- Group - Select a group from the drop-down list.
- Password enabled - Tick this option if your template has the CloudStack password change script installed. That means the VM created on the base of this template will be accessed by a password, and this password can be reset.
- Dynamically scalable - Tick this option if the template contains XS/VM Ware tools to support dynamic scaling of VM CPU/memory.

Note: Required fields are marked with an asterisk (*).

Click “Show additional fields” to expand the list of optional settings. It allows creating a template that requires HVM. Tick this option in this case.

Once all fields are filled in click “Create” to create the new template.

Click “Cancel” to cancel the template creation.

Create Volume

This action allows creating a volume from the snapshot.

Type a name for a new volume into the Name field in the modal window. Click “Create” to register a new volume.

Click “Cancel” to cancel the volume creation.

Revert Volume to Snapshot

This action allows turning the volume back to the state of the snapshot. It is available to those snapshots that have a volume.

Register a new template

Name *	OS type *
Template 1	Apple Mac OS X 10.6 (32-bit) ▾
Description *	Group
Description for template 1	High CPU ▾
10 / 255	
26 / 255	
<input checked="" type="checkbox"/> Password enabled	
<input type="checkbox"/> Dynamically scalable	

HIDE ADDITIONAL FIELDS

☒ Requires HVM

CANCEL

CREATE



● 180212-1404
Volume: Deleted
Created: 2/12/2018, 2:04 PM GMT...

● 180212-1402
Volume: Deleted
Created: 2/12/2018, 2:02 PM GMT...

● 180212-1352
Volume: Deleted
Created: 2/12/2018, 1:52 PM GMT...

● 180212-1351
Volume: ROOT-833
Created: 2/12/2018, 1:51 PM GMT...

● 180212-1351
Volume: ROOT-1438
Created: 2/12/2018, 1:51 PM GMT...

● 180212-1351
Volume: ROOT-1438
Created: 2/12/2018, 1:51 PM GMT...

● 180212-1351
Volume: ROOT-1438
Created: 2/12/2018, 1:51 PM GMT...

● 180212-1200
Volume: ROOT-1562
Created: 2/12/2018, 11:51 AM GMT...

● 180212-1159
Volume: ROOT-1562
Created: 2/12/2018, 11:59 AM GMT...

● 180212-1151
Volume: ROOT-1562
Created: 2/12/2018, 11:51 AM GMT...

● 180212-1117
Volume: Deleted
Created: 2/12/2018, 11:17 AM GMT...

New volume

Name *


New Volume

10 / 255

CANCEL

CREATE


In the dialogue window confirm your action. Please, note, the virtual machine the volume is assigned to will be rebooted.

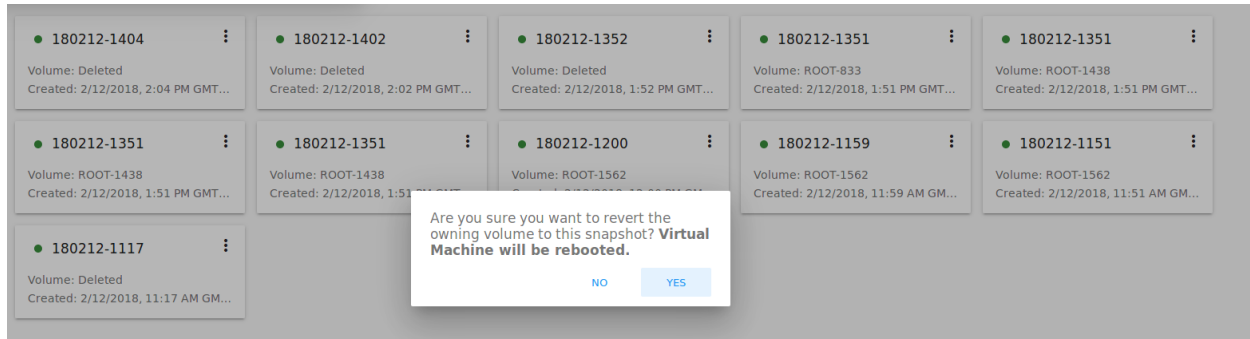

Delete

This action allows deleting a snapshot from the system.

Click “Delete” in the Action box and confirm your action in modal window. The snapshot will be deleted.

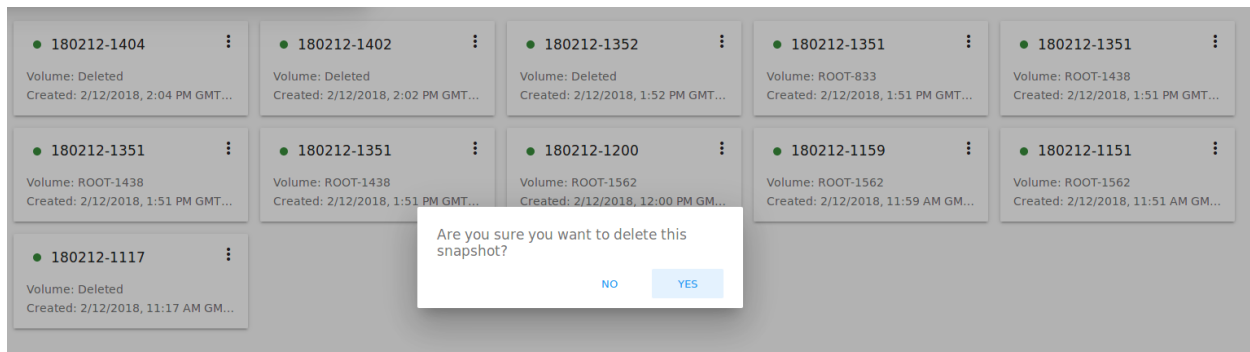


Click “Cancel” to cancel the snapshot deleting.

2.6 Firewall

Contents

- *Firewall*
 - *Firewall List*
 - *Create a Security Group Template*
 - *Create a Shared Security Group*
 - *Private Security Groups*
 - *Security Group Details Sidebar*
 - *Security Group Action Box*
 - * *Edit a Firewall Template/Security Group*

The *Firewall* section contains templates to create a security group for a virtual machine and shared security groups used for virtual machines of other users.

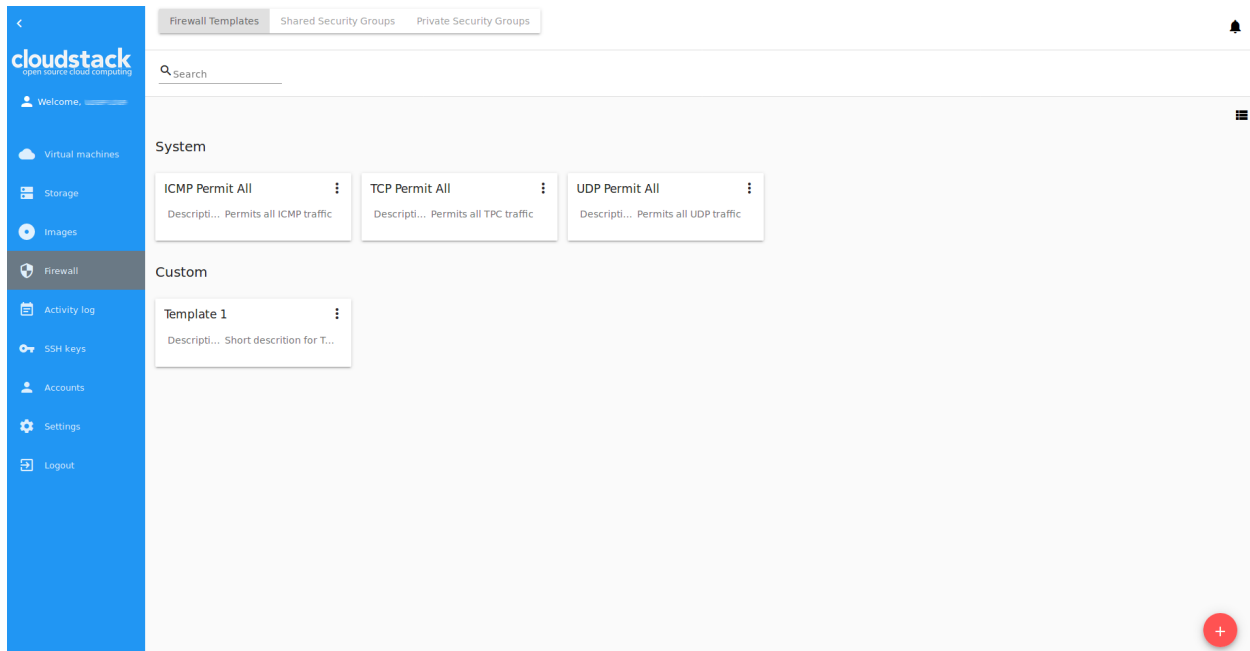

Firewall templates are presets of rules that can be system or developed by a user (custom). Administrators can specify default presets during the interface deployment in the JSON configuration file (find more in [Configurations Guide](#)). Now there are “TCP Permit All”, “UDP Permit All”, “ICMP Permit All” system firewall templates in the system. They just pass all the traffic. We offer them because we would like a user to make his virtual machines accessible without diving into technical details. If it is necessary, a custom firewall template can be created. Find more information on how to create a custom firewall template at [Create a Security Group Template](#).

Upon VM creation the system creates a new security group for a VM on the base of templates. This group is initially filled with all the rules from specified presets. Next, when the user changes the rules for a certain virtual machine, it does not affect other machines. These changed rules make a **private security group** used for that virtual machine only.

The second way is to use a **shared security group** for your virtual machine. Shared groups are used by other VMs. Changes of rules in them may affect other VMs.



Users can manage security group rules in two modes: a “view” mode with filtering by types and protocols and an “edit” mode. Security groups editing is available when switching from “view” mode to “editing” mode. If the group is shared, the user is warned that changes will affect other VMs using this group. This behavior allows avoiding undesirable changes for other VMs.


Templates, shared and private security groups are placed in different tabs of the *Firewall* section. You can switch from templates to shared or private security groups using the tool above the list.

A user can see security groups of his/her user only. An Administrator can observe security groups of all accounts in the domain.

2.6.1 Firewall List


The security groups are presented in a list format. You can change the view from list to cards clicking the switch view

icon  /  in the upper-right corner.

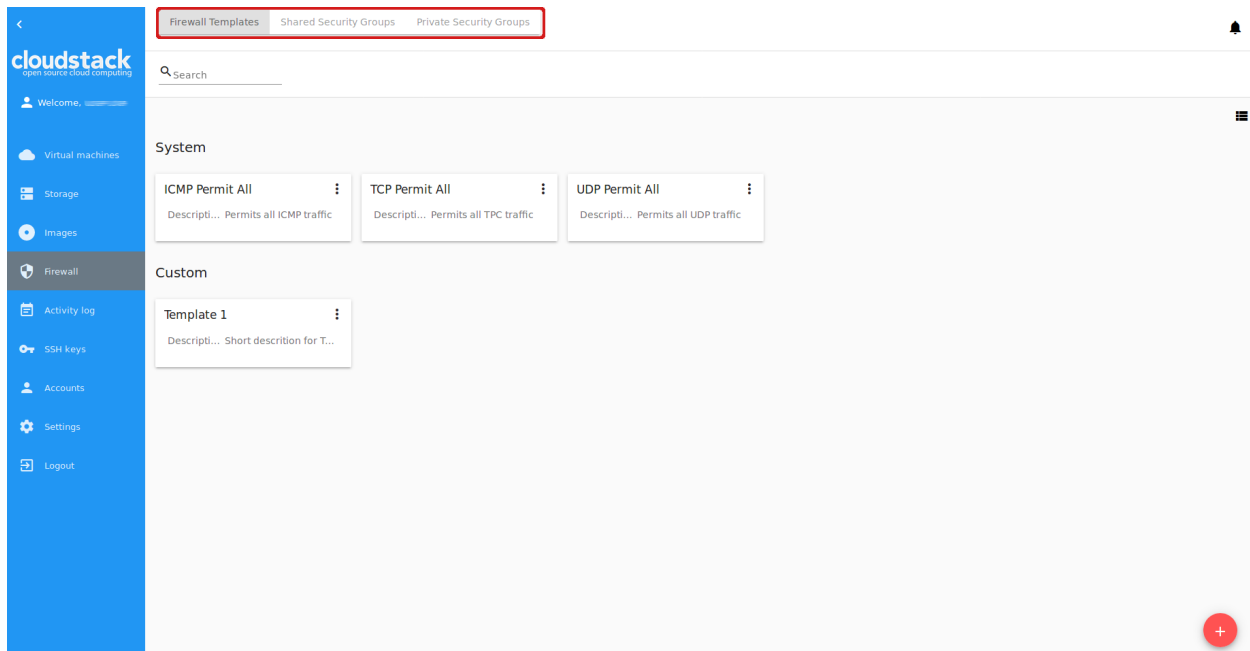

To quickly find the security group you need, please, use the search tool above the list. Enter a name or a part of the name of the template/security group and see the immediate result.

Administrators can filter the list of templates/shared groups by accounts.

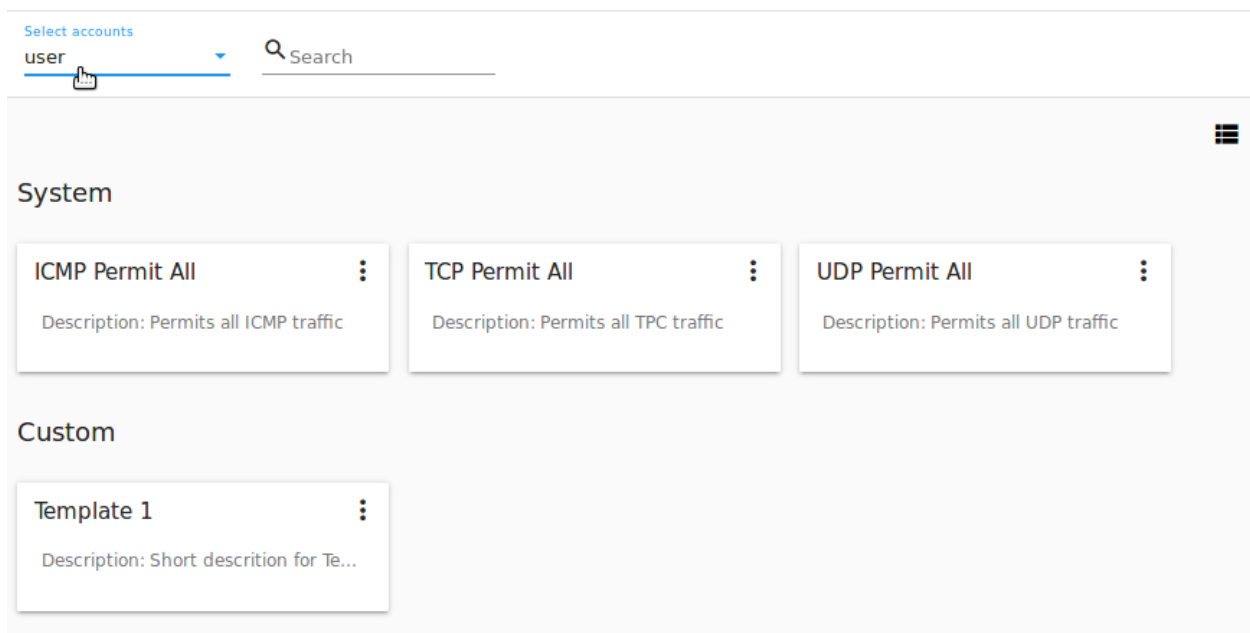


2.6.2 Create a Security Group Template

You can create your own template. It will be available as a base at a new private security group creation for VM.

A new security group template is created on the base of existing templates. This security group will be created as a custom template (with a `custom-template` type).

If you would like to create a new security group template, click “Create” in the bottom-right corner and fill in the form:

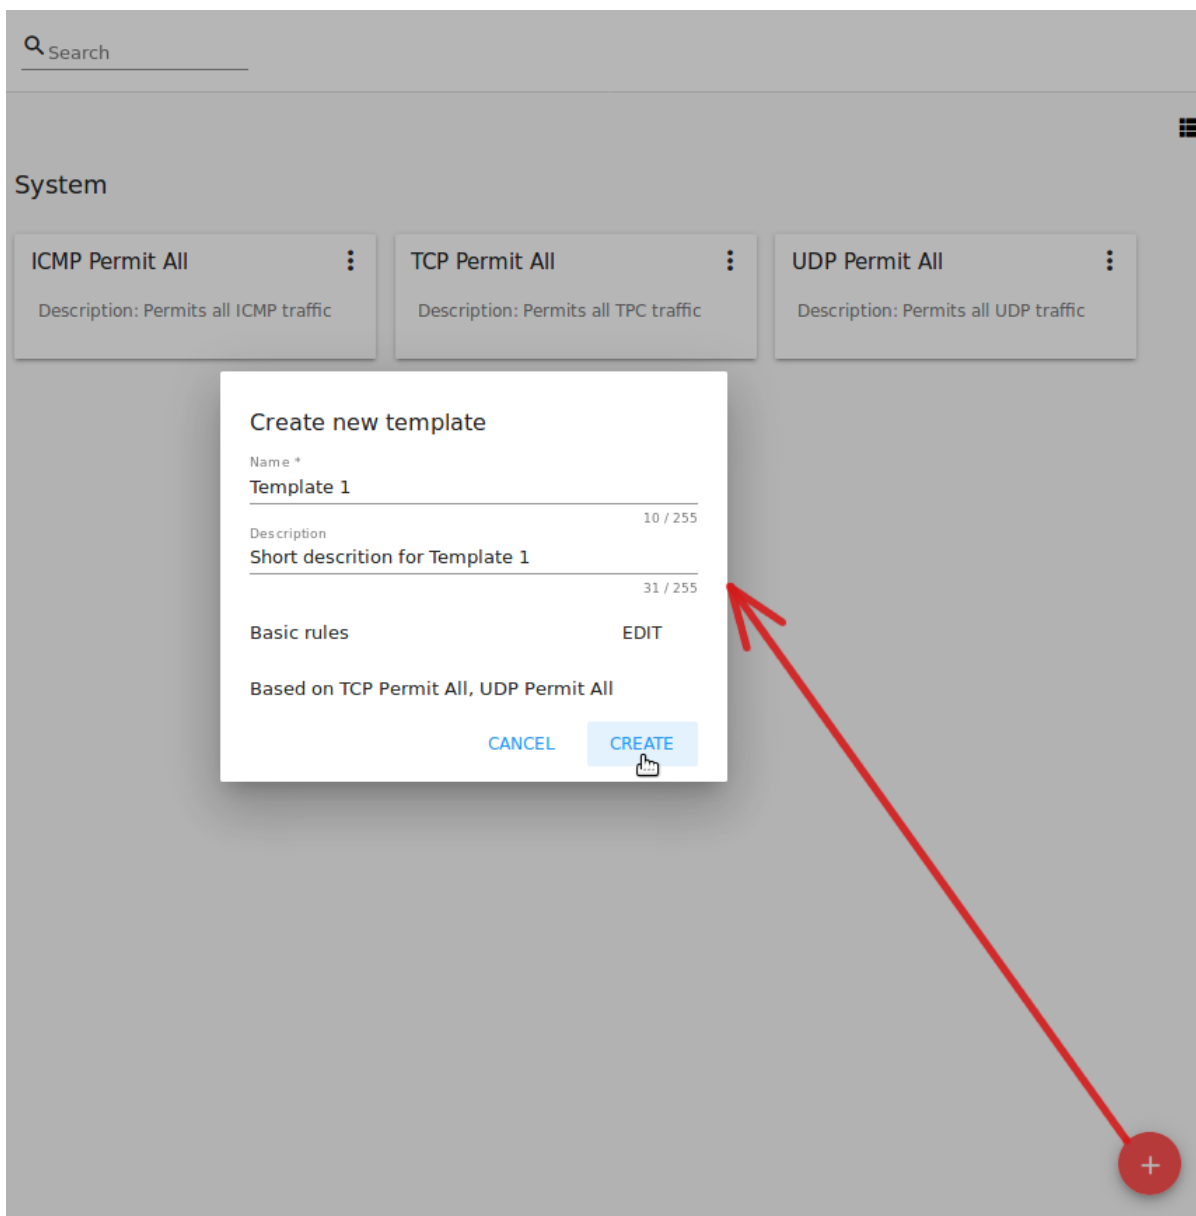

- Name * - Enter a name for the template.
- Description - Provide a short description for the firewall template.
- Basic rules - Click “ADD” to open the list of rules to assign them to the template. In the appeared window select a template in the “All templates” list at the left and move it to the “Selected templates” list at the right by clicking the arrow icon:

Click “SELECT ALL” to move all templates from left to right at once.

Click “RESET” to drop all selected templates.

In the list below you will see the rules corresponding to the selected templates. All of them are checked as selected. Uncheck those you do not wish to add to your firewall template.

Click “SAVE” to apply the selected rules to your security group template.

Build a new security group

All templates

SELECT ALL

Selected templates

TCP Permit All

UDP Permit All

ICMP Permit All

Template 1

>

<

Network rules

CANCEL

SAVE

Build a new security group

All templates	SELECT ALL	Selected templates	RESET
UDP Permit All		TCP Permit All	
ICMP Permit All			
Template 1			


Network rules

Incoming TCP traffic to ip 0.0.0.0/0 to port range 1-65535	<input checked="" type="checkbox"/>
Outgoing TCP traffic to ip 0.0.0.0/0 to port range 1-65535	<input type="checkbox"/>

CANCEL SAVE

Click “CANCEL” to drop the selected options. No rules will be assigned to the template. You will return to the “Create a new security group” window.

When all fields are completed, click “CREATE” to create the new firewall template. The template will appear in the list of firewall templates as *Custom*:

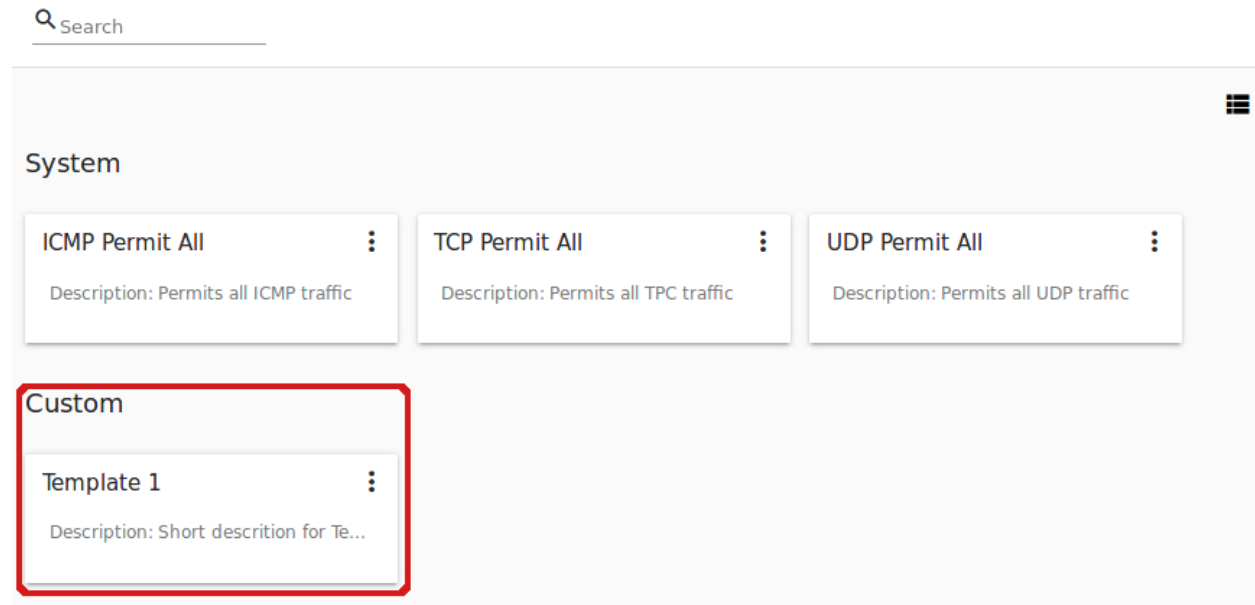

Click “CANCEL” to cancel the template creation process. No firewall templates will be created then. All fields will be cleared in the form.

2.6.3 Create a Shared Security Group

You can create a shared security group and it will be available for creating virtual machines of other users.

A new shared security group is created on the base of existing templates. This security group will be created with a `shared` type.

If you would like to create a new shared security group, click “Create” in the bottom-right corner and fill in the form:

- Name * - Enter a name for the group.
- Description - Provide a short description for the group.
- Basic rules - Click “ADD” to open the list of rules to assign them to the group. In the appeared window select a template in the “All templates” list at the left and move it to the “Selected templates” list at the right by clicking the arrow icon:

Click “SELECT ALL” to move all templates from left to right at once.

Click “RESET” to drop all selected templates.

In the list below you will see the rules corresponding to the selected templates. All of them are checked as selected. Uncheck those you do not wish to add to your shared security group.

Click “SAVE” to apply the selected rules to your security group template.

Click “CANCEL” to drop the selected options. No rules will be assigned to the security group. You will return to the “Create a new security group” window.

Click “CREATE” to create the new shared security group. The group will appear in the list of shared security groups.

Build a new security group

All templates

SELECT ALL

Selected templates

TCP Permit All

UDP Permit All

ICMP Permit All

Template 1

>

<

Network rules

CANCEL

SAVE

Build a new security group

All templates

SELECT ALL

Selected templates

RESET

UDP Permit All

ICMP Permit All

Template 1

TCP Permit All


Network rules



Incoming **TCP** traffic to ip **0.0.0.0/0** to port range **1-65535**

Outgoing **TCP** traffic to ip **0.0.0.0/0** to port range **1-65535**

CANCEL

SAVE

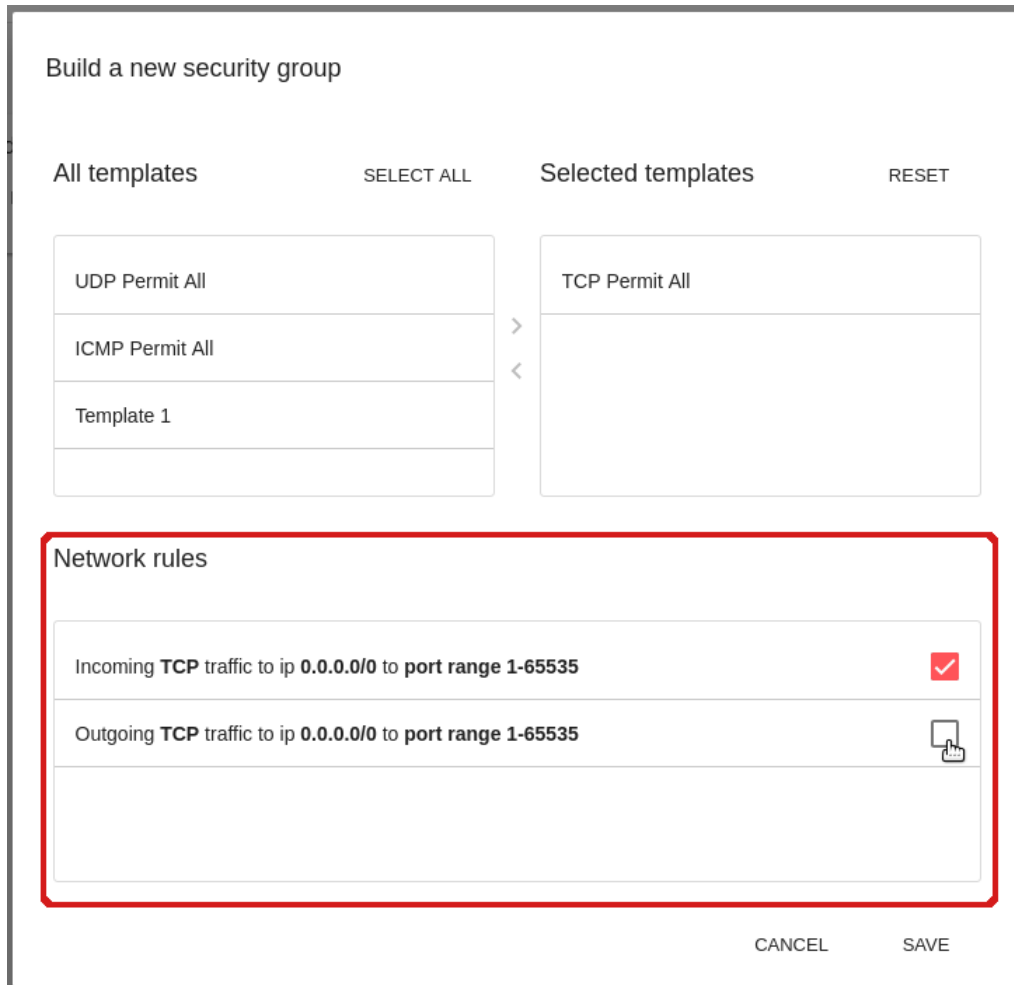

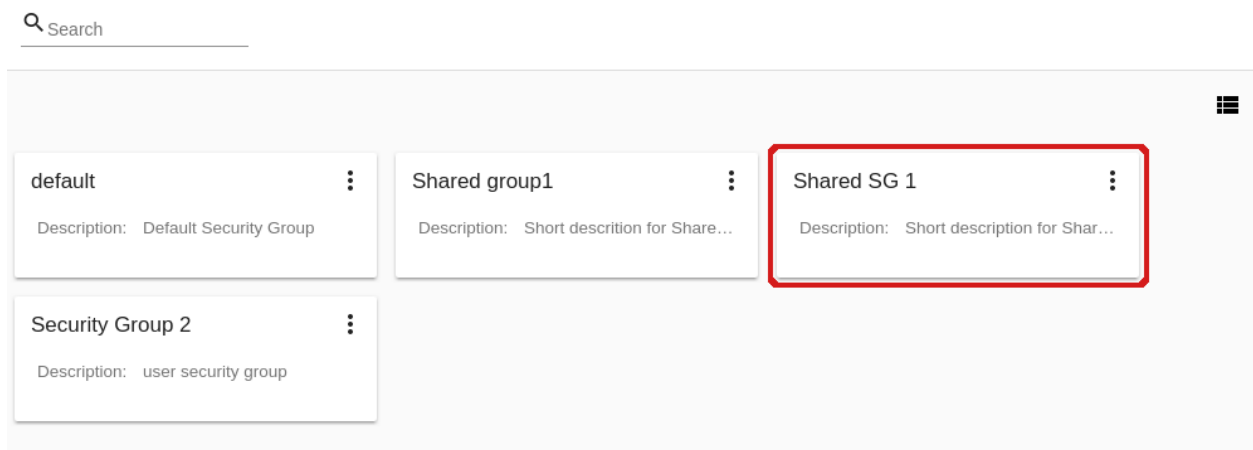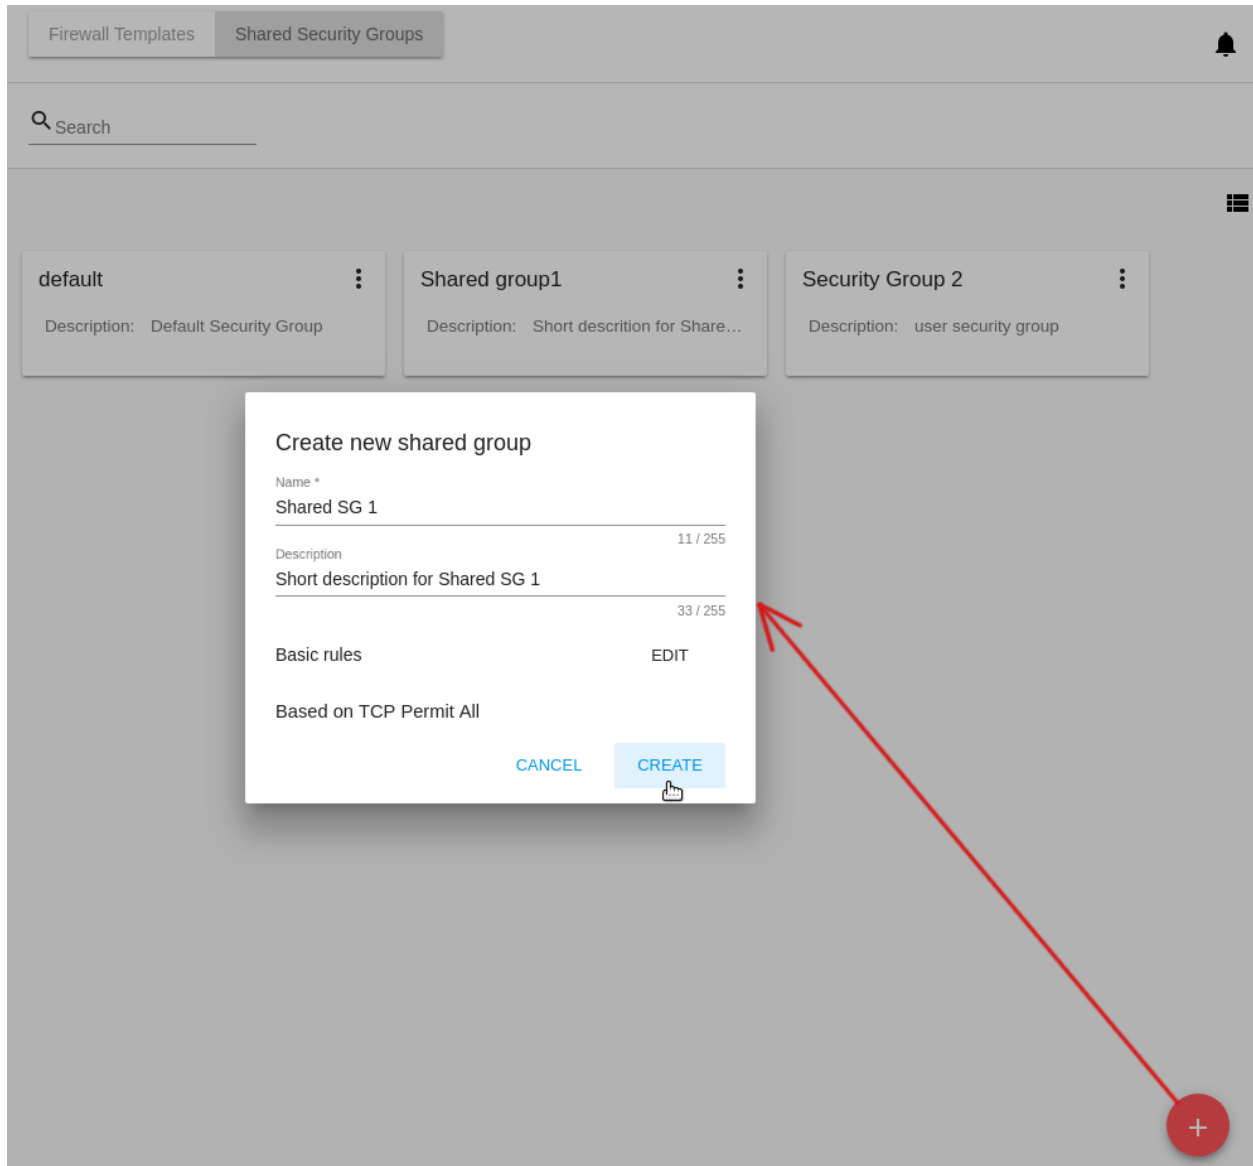

Click “CANCEL” to cancel the group creation process. No group will be created then. All fields will be cleared in the form.

2.6.4 Private Security Groups

Private security groups are listed in the *Private Security Groups* section.

Security groups appear in this section once they are created for a virtual machine (see [Create a Virtual Machine](#)). A private security group name has the following format - sg-{{ virtual machine name }} - containing the name of the virtual machine it is created for.

You can quickly find a group by its name or a part of the name using the searching tool above the list.

Firewall Templates Shared Security Groups Private Security Groups

☐ Orphan Search 12

8a385460-985f-4812-83f6-...
VM name: Not available

Besides, Administrators can filter the list by accounts.


Firewall Templates Shared Security Groups Private Security Groups

Select accounts ☐ Orphan Search

ff8b62f1-9ab2-4971-982b-...
VM name: Not available

c59ee72d-8183-40cf-b845-...
VM name: vm-develop-337

You can filter the list by ticking the “Orphan” checkbox above. It allows displaying only the security groups that are not used by any machine.

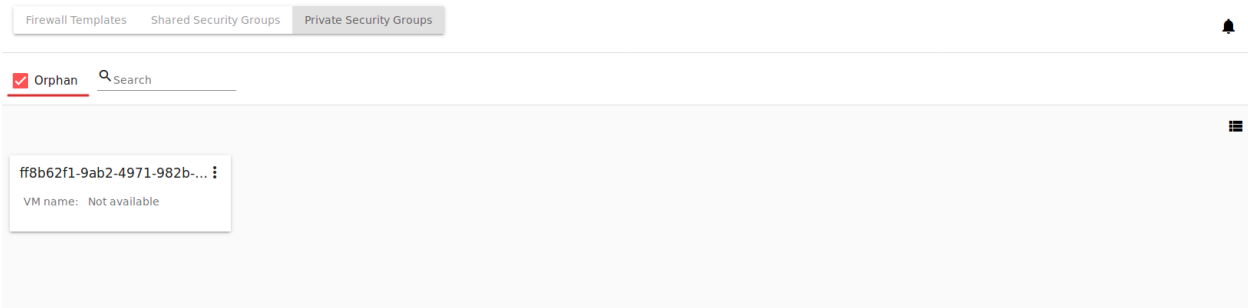


The “Orphan” option appears above the list in case the security groups that are not used by any VM exist in the list. This might happen in case a VM has been deleted but a group has been not (because of an error or incorrect behavior).


2.6.5 Security Group Details Sidebar

You can see the firewall rules details in the sidebar to the right.

Click the template/shared/private security group in the list and open the sidebar. You will see two tabs there - Details and Tags.

The **Details** tab contains the following information:

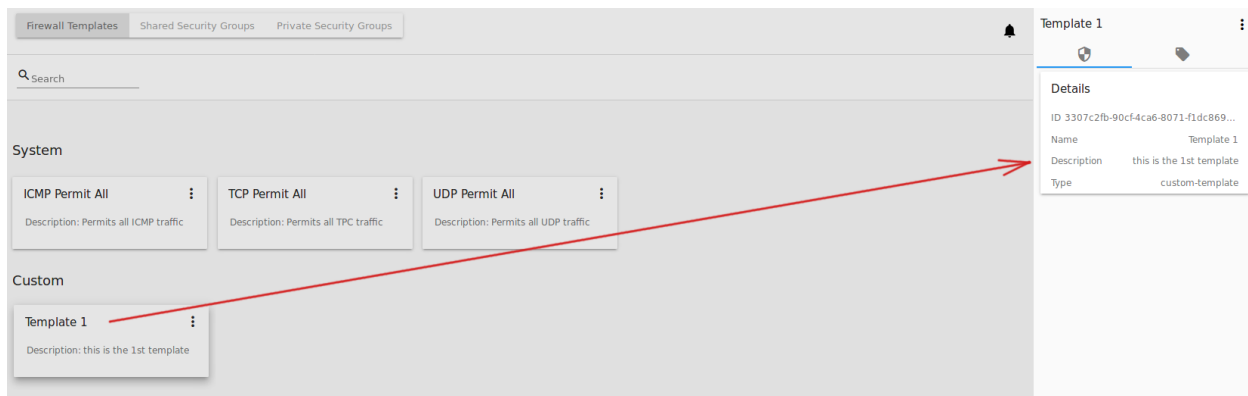

- Name of the security group;
- *Security Group Action Box* under ;
- ID of the security group;
- Description giving an idea what the security group contains (not available for private security groups);
- Type - Defines the security group types. For firewall templates it can be `custom-template` for custom templates, or `predefined-template` for system templates. For shared security groups it is `shared`. For private security groups you will see `private`.



For shared security groups you also can see what virtual machines this group is assigned to. The machine name in the list is active. You can move to the virtual machine details bar by clicking it.

For private security groups a VM name is also displayed in the details sidebar, but it is not active.

default



Details

ID 33bde2cb-c13a-434d-958b-3b410...

Name

default

Description


Default Security Group

Type

shared


VMs using the group


VM2



The **Tags** tab presents the list of tags assigned to the security group. Using the search tool above you can quickly find a tag by its name.

System tags are listed in a separate card.

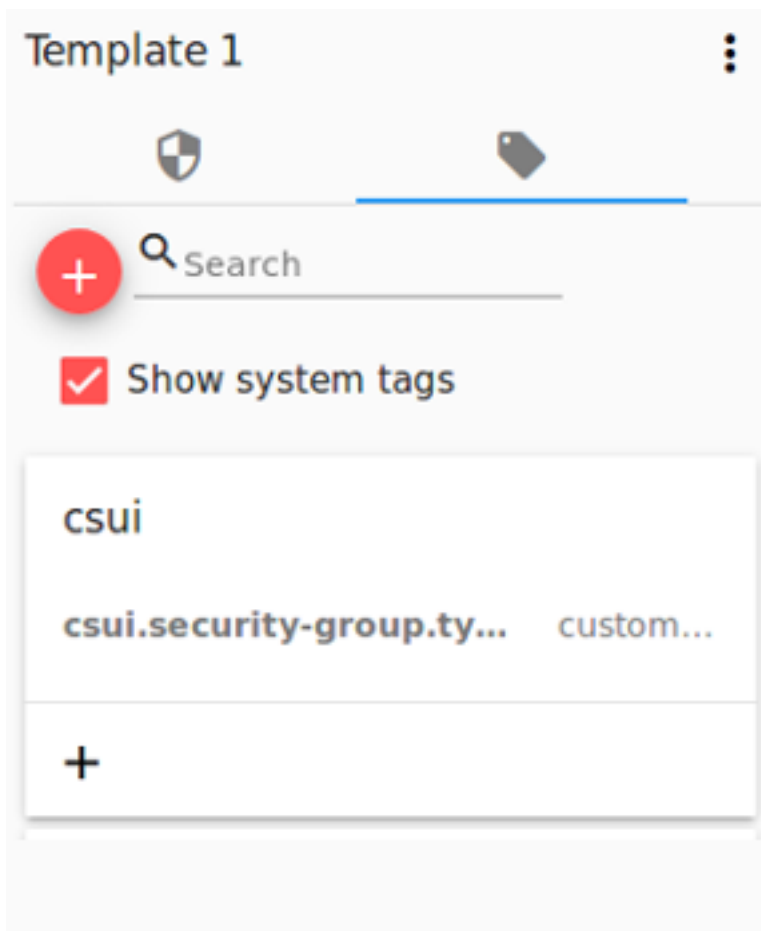


lick  to add a tag. Enter a key and a value.

Click “Create” to create the new tag. It will be saved in a separate card.


An existing tag can be edited or deleted by clicking a correspondent icon next to the tag’s name.

2.6.6 Security Group Action Box


Firewall templates, shared and private security groups have an Action box with the following actions in it:

- View - Allows viewing the rules in the group/template. Click “Rules”  to open the rules implemented to the template.
- Delete - Allows deleting the group or the template from the system.

Note: A template/security group cannot be deleted if it is used for a virtual machine, or it belongs to another user. Deleting action is not available for system firewall templates.

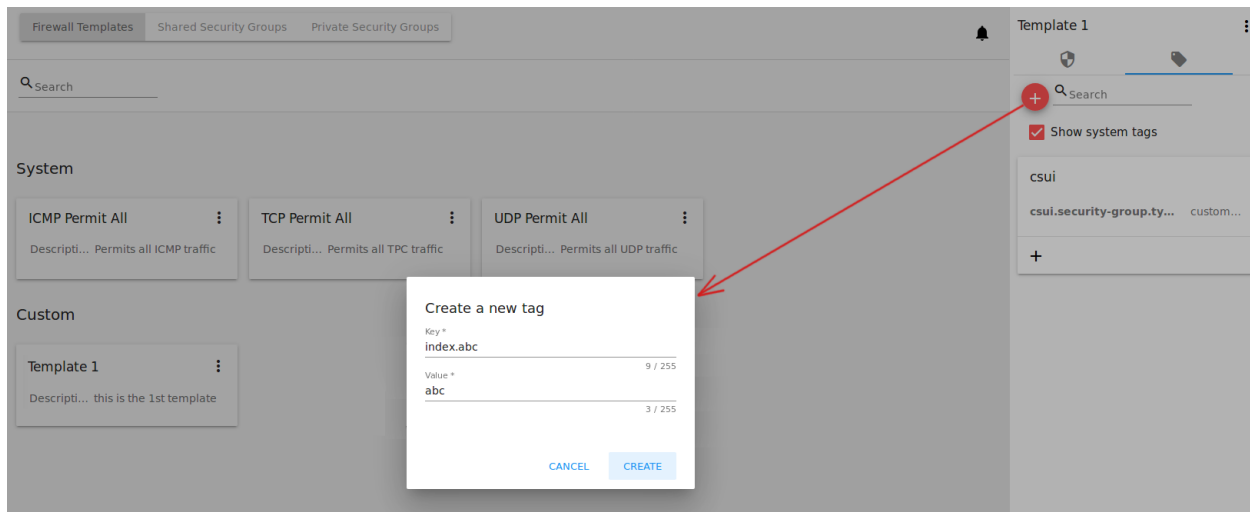


Edit a Firewall Template/Security Group

When clicking “Rules”  in the Action box you open a modal window where the rules of the template/security group are listed. The list of rules can be filtered by:

- Types - Ingress and/or Egress;
- Protocols - TCP and/or UDP and/or ICMP;

Besides, you can group the rules by types and/or protocols.

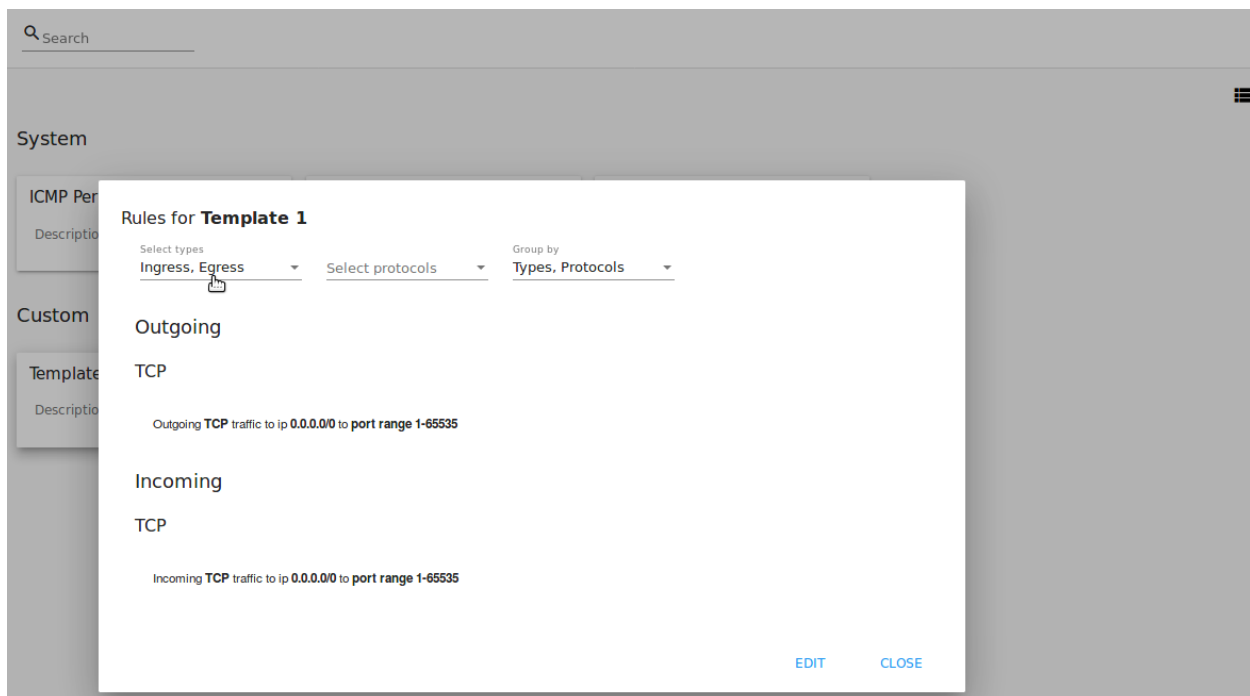

You can edit the implemented rules right in this modal window by clicking “EDIT” below the list. When switching to the edit mode you are enabled to add rules or delete the selected ones from the list.

To add rules, please, fill in the fields in the panel above the list and click “+”:

Edit rules for **Template 1**

Ingress TCP 0.0.0.0/0 Start port * 3 End port * 10 +

Outgoing

TCP

Outgoing TCP traffic to ip 0.0.0.0/0 to port range 1-65535

Incoming

TCP

Incoming TCP traffic to ip 0.0.0.0/0 to port range 1-65535

VIEW CLOSE

To delete rules, please, click the Delete icon in the list. The rule will be deleted from the security group.

Then you can move back to the view mode, or close the window. You will see the rules are edited.

Please, note, when editing shared security groups, a warning message appears:

Click “Yes” if you still want to edit a shared security group. You will be switched to the “Edit” mode. Change the security group as you need following the instructions above.

Note: Editing is not available for system firewall templates and security groups of other users. You can view the rules only.


2.7 Activity log

Contents

- *Activity log*
 - *Events List*
 - * *Filtering of Events*


In the *Activity log* section you can see user activity in the account. Event search by main parameters - date and keywords - is supported to make it easier to find a necessary event for a specific date or type.

Edit rules for **Template 1**

Ingress **TCP** **0.0.0.0/0** **Start port *** **3** **End port *** **10** 


Outgoing

TCP



Outgoing **TCP** traffic to ip **0.0.0.0/0** to port range **1-65535** 

Incoming

TCP


Incoming **TCP** traffic to ip **0.0.0.0/0** to port range **1-65535** 

[VIEW](#) [CLOSE](#)

default  **test-user-sg** 

Description: Default Security Group Description: test user sg


Rules for default

Select types  Select

Incoming **TCP** traffic to ip **0.0.0.0/0** to port range **1-65535**

Incoming **TCP** traffic to ip **0.0.0.0/0** to port range **1-65535**

Incoming **TCP** traffic to ip **0.0.0.0/0** to port range **1-65535**



[NO](#) [YES](#)


[EDIT](#) [CLOSE](#)

This group is shared. Other VMs that use this group will also be affected. Are you sure you want to edit this group?

2.7.1 Events List

Events in the Activity log are listed in a chronological order from the latest till the earliest. It represents the full list of events for a selected day.

A user can view activities for his/her user only. An Administrator can see events for all accounts in the domain.

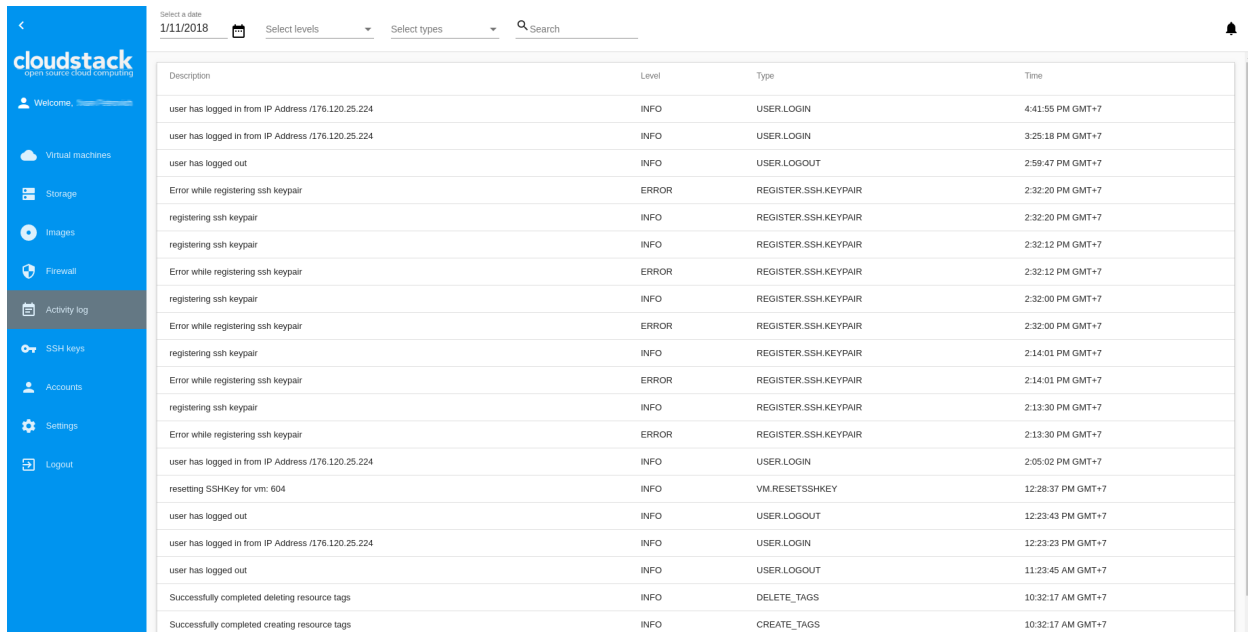

Description	Level	Type	Time
user has logged in from IP Address /176.120.25.224	INFO	USER.LOGIN	4:41:55 PM GMT+7
user has logged in from IP Address /176.120.25.224	INFO	USER.LOGIN	3:25:18 PM GMT+7
user has logged out	INFO	USER.LOGOUT	2:59:47 PM GMT+7
Error while registering ssh keypair	ERROR	REGISTER.SSH.KEYPAIR	2:32:20 PM GMT+7
registering ssh keypair	INFO	REGISTER.SSH.KEYPAIR	2:32:20 PM GMT+7
registering ssh keypair	INFO	REGISTER.SSH.KEYPAIR	2:32:12 PM GMT+7
Error while registering ssh keypair	ERROR	REGISTER.SSH.KEYPAIR	2:32:12 PM GMT+7
registering ssh keypair	INFO	REGISTER.SSH.KEYPAIR	2:32:00 PM GMT+7
Error while registering ssh keypair	ERROR	REGISTER.SSH.KEYPAIR	2:32:00 PM GMT+7
registering ssh keypair	INFO	REGISTER.SSH.KEYPAIR	2:14:01 PM GMT+7
Error while registering ssh keypair	ERROR	REGISTER.SSH.KEYPAIR	2:14:01 PM GMT+7
registering ssh keypair	INFO	REGISTER.SSH.KEYPAIR	2:13:30 PM GMT+7
Error while registering ssh keypair	ERROR	REGISTER.SSH.KEYPAIR	2:13:30 PM GMT+7
user has logged in from IP Address /176.120.25.224	INFO	USER.LOGIN	2:05:02 PM GMT+7
resetting SSHKey for vm: 604	INFO	VM.RESETSSHKEY	12:28:37 PM GMT+7
user has logged out	INFO	USER.LOGOUT	12:23:43 PM GMT+7
user has logged in from IP Address /176.120.25.224	INFO	USER.LOGIN	12:23:23 PM GMT+7
user has logged out	INFO	USER.LOGOUT	11:23:45 AM GMT+7
Successfully completed deleting resource tags	INFO	DELETE_TAGS	10:32:17 AM GMT+7
Successfully completed creating resource tags	INFO	CREATE_TAGS	10:32:17 AM GMT+7


The following information for each event is presented in the list:

- Event description.
- Level - A kind of a category the event belongs to. It can show:
 - INFO - For regular activities, for example, logging in, creating a VM, attaching a disk.
 - WARN - For any warnings occurred.
 - ERROR - For any errors occurred, for example, an error while registering an SSH key pair.
- Type - Displays in what aspect of the system the event has taken place, for example: `USER.LOGIN` - for events happened at user authentication to the system; `VOLUME.RESIZE` - for events at disk size change.
- Time of the event.

Filtering of Events

To easily find an event in the list use the filtering tool above.


Any user can filter events by:

- Date - Allows selecting events for a specific date. By default, the today's date is selected. Click  and in the appeared calendar change the date for the day you wish to see activities for.

Click “OK” to filter the list. The events will be selected in accordance with the chosen date.

Click “CANCEL” to drop the selection.

-Levels - Allows selecting events by levels. Choose the level/levels you wish from the drop-down list.

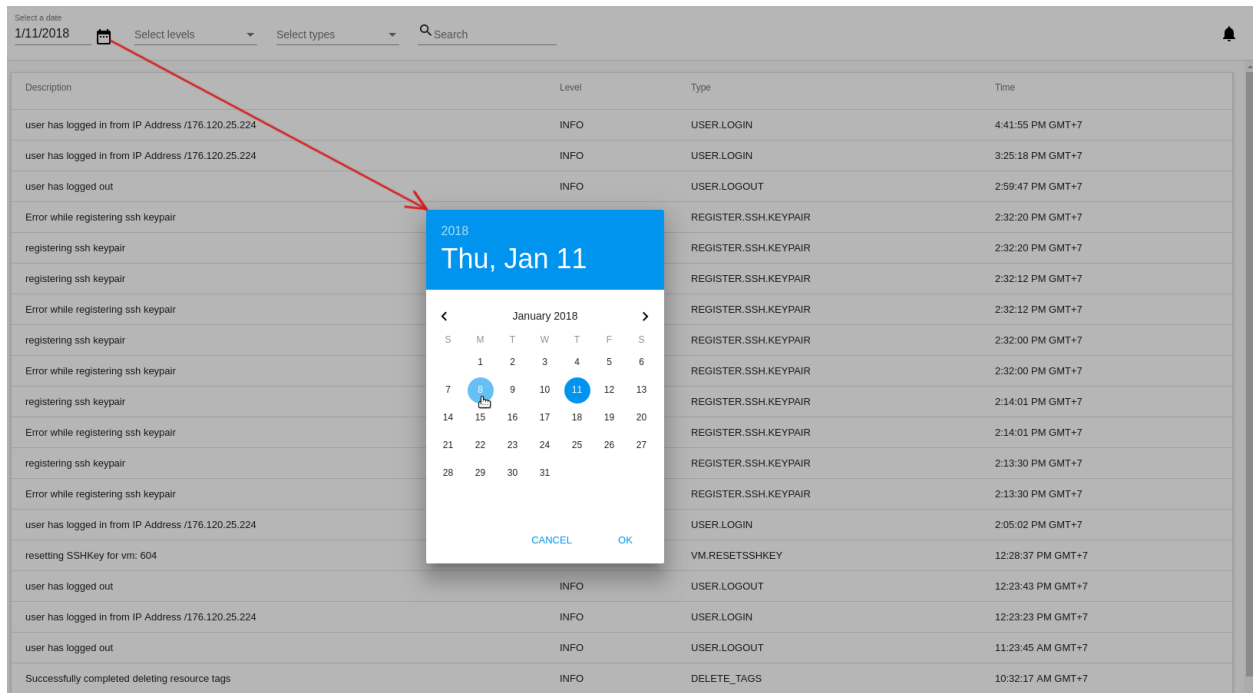

-Types - Allows selecting events by types. Choose the type/types from the drop-down list.

An Administrator has an additional filtering parameter - accounts.

Use the search tool to find an event by keywords or a part of a word.

2.8 SSH Keys

Contents

- *SSH Keys*
 - *SSH Key List*
 - * *Filtering of SSH Keys*
 - *Create an SSH Key*
 - *SSH Key Details Sidebar*
 - *SSH Key Action Box*

In the *SSH keys* section you can create and manage SSH keys.

In addition to the username and password authentication, CloudStack supports using SSH keys to log in to the cloud infrastructure for additional security. Find more information in the [official documentation](#).

CloudStack-UI allows managing SSH key in a separate section which is more convenient for a user.

Select a date
1/11/2018

Select levels

Select types

Select accounts
user

Search

Description	Level	Type	Time
user has logged out	INFO	USER.LOGOUT	4:51:50 PM GMT+7
user has logged in from IP Address /176.120.25.224	INFO	USER.LOGIN	4:41:55 PM GMT+7
user has logged in from IP Address /176.120.25.224	INFO	USER.LOGIN	3:25:18 PM GMT+7
user has logged out	INFO	USER.LOGOUT	2:59:47 PM GMT+7
Error while registering ssh keypair	ERROR	REGISTER.SSH.KEYPAIR	2:32:20 PM GMT+7
registering ssh keypair	INFO	REGISTER.SSH.KEYPAIR	2:32:20 PM GMT+7
Error while registering ssh keypair	ERROR	REGISTER.SSH.KEYPAIR	2:32:12 PM GMT+7
registering ssh keypair	INFO	REGISTER.SSH.KEYPAIR	2:32:12 PM GMT+7
Error while registering ssh keypair	ERROR	REGISTER.SSH.KEYPAIR	2:32:00 PM GMT+7
registering ssh keypair	INFO	REGISTER.SSH.KEYPAIR	2:32:00 PM GMT+7
Error while registering ssh keypair	ERROR	REGISTER.SSH.KEYPAIR	2:14:01 PM GMT+7
registering ssh keypair	INFO	REGISTER.SSH.KEYPAIR	2:14:01 PM GMT+7
Error while registering ssh keypair	ERROR	REGISTER.SSH.KEYPAIR	2:13:30 PM GMT+7
registering ssh keypair	INFO	REGISTER.SSH.KEYPAIR	2:13:30 PM GMT+7
user has logged in from IP Address /176.120.25.224	INFO	USER.LOGIN	2:05:02 PM GMT+7
resetting SSHKey for vm: 604	INFO	VM.RESETSSHKEY	12:28:37 PM GMT+7
user has logged out	INFO	USER.LOGOUT	12:23:43 PM GMT+7
user has logged in from IP Address /176.120.25.224	INFO	USER.LOGIN	12:23:23 PM GMT+7
user has logged out	INFO	USER.LOGOUT	11:23:45 AM GMT+7

Select a date
12/27/2017

Select levels


Select types

Search
destr



Description	Level	Type	Time
Successfully completed destr ^o ying Vm. Vm Id: 640	INFO	VM.DESTR ^O Y	4:04:51 PM GMT+7
destr ^o ying vm: 640	INFO	VM.DESTR ^O Y	4:04:48 PM GMT+7
destr ^o ying Vm. Vm Id: 640	INFO	VM.DESTR ^O Y	4:04:48 PM GMT+7
Successfully completed destr ^o ying Vm. Vm Id: 640	INFO	VM.DESTR ^O Y	4:04:05 PM GMT+7
destr ^o ying vm: 640	INFO	VM.DESTR ^O Y	4:04:01 PM GMT+7
destr ^o ying Vm. Vm Id: 640	INFO	VM.DESTR ^O Y	4:04:01 PM GMT+7

2.8.1 SSH Key List

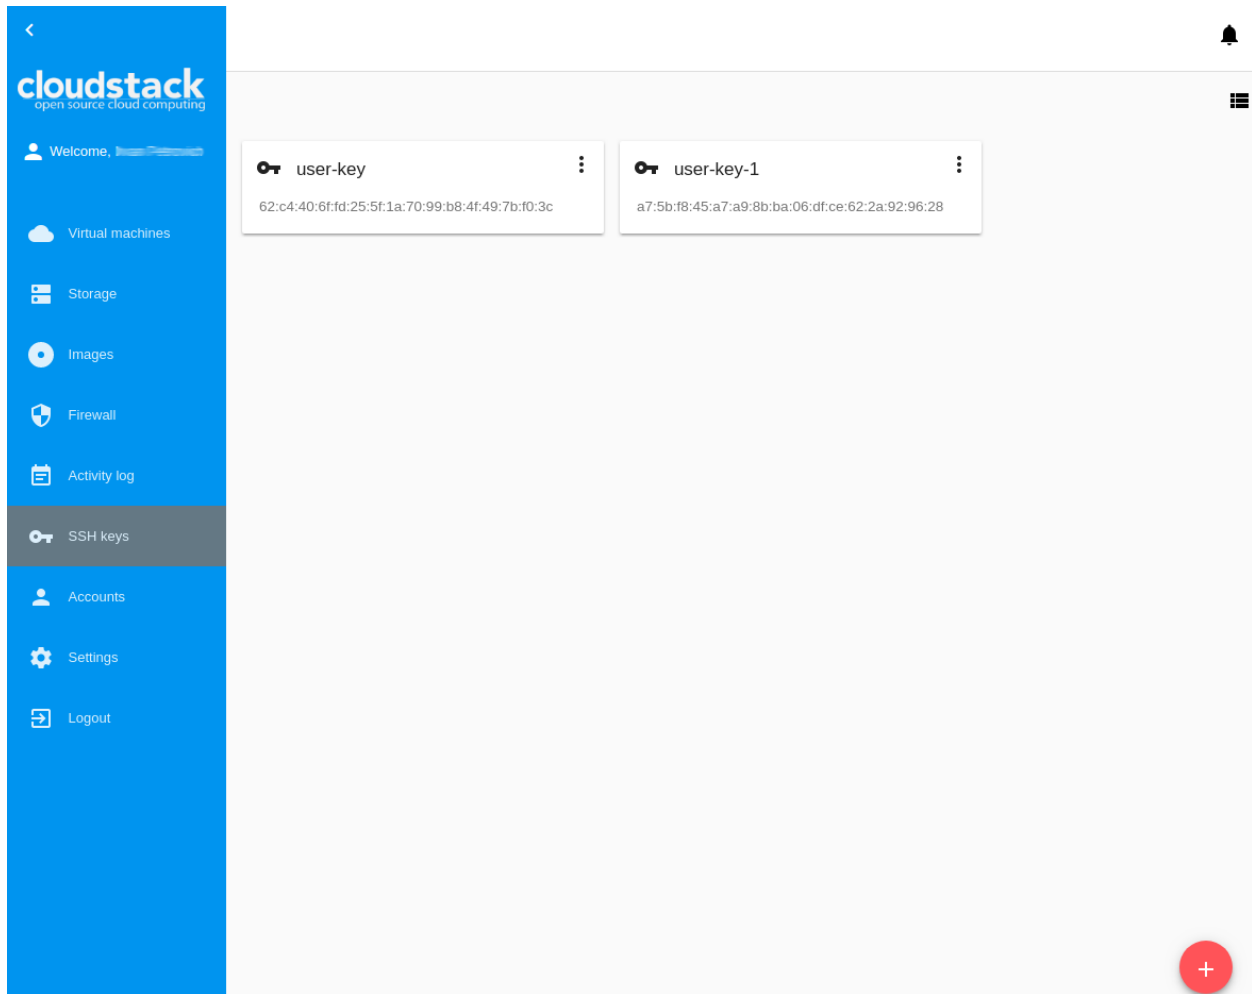SSH keys existing in the account are presented in this section. A user can see and manage SSH keys for his/her user only.



Administrators can see and manage keys for all accounts in the domain.


You can switch the view from a list mode to a card mode using the switch tool  /  in the upper-right corner.

For every key the following information is displayed:

- Key name;
- SSH public key;
- Action box - Allows deleting a key from the system.


Filtering of SSH Keys

The filtering tool is available to Administrators. It is placed above the list of keys and allows filtering keys by accounts. Besides, the keys can be grouped by accounts that may be convenient for list viewing.

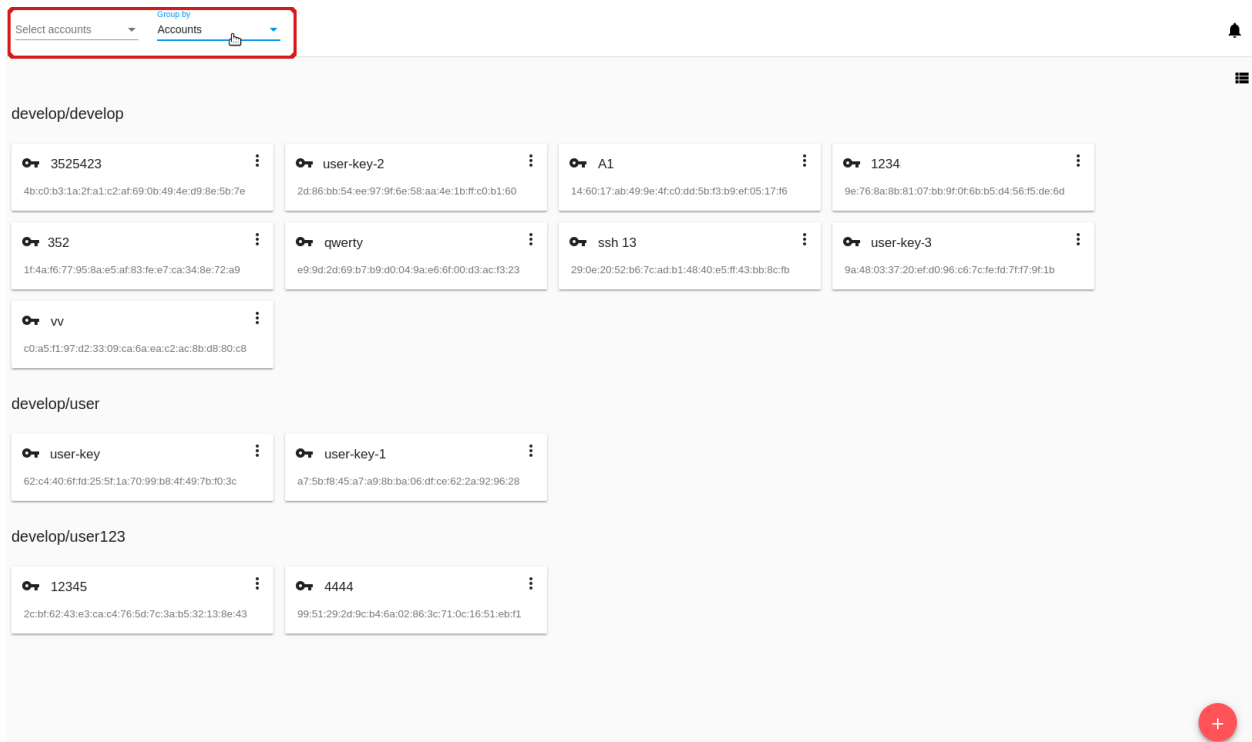

2.8.2 Create an SSH Key

You can generate a new SSH key to use for authentication.

By clicking “Create”  in the bottom-right corner you will open a form where you should specify a key name:

Then click “CREATE”. The SSH key will be auto-generated. The public key will appear in the list of SSH keys with a fingerprint. In the modal window, you will see the private key. This private key is not saved in the system. You should save it for yourself. Click “COPY” to correctly copy it and save it locally.

Then click “OK” to close the window.

You can specify an SSH public key entering its value in the field. It should start from `ssh-rsa` followed by one space and at least one symbol. Then click “CREATE”. The key will be saved. No private key is required in this case.


The created SSH key is available to assign to VMs now.


2.8.3 SSH Key Details Sidebar

By clicking an SSH key in the list you will open a details sidebar to the right.


It contains the following information:

- SSH key name;
- Key action box allowing key deleting;
- SSH public key fingerprint;
- SSH key description - In this block a description can be added to understand better what this key is for. Click the block and enter a short description in the text field. Then click “SAVE” to save it.

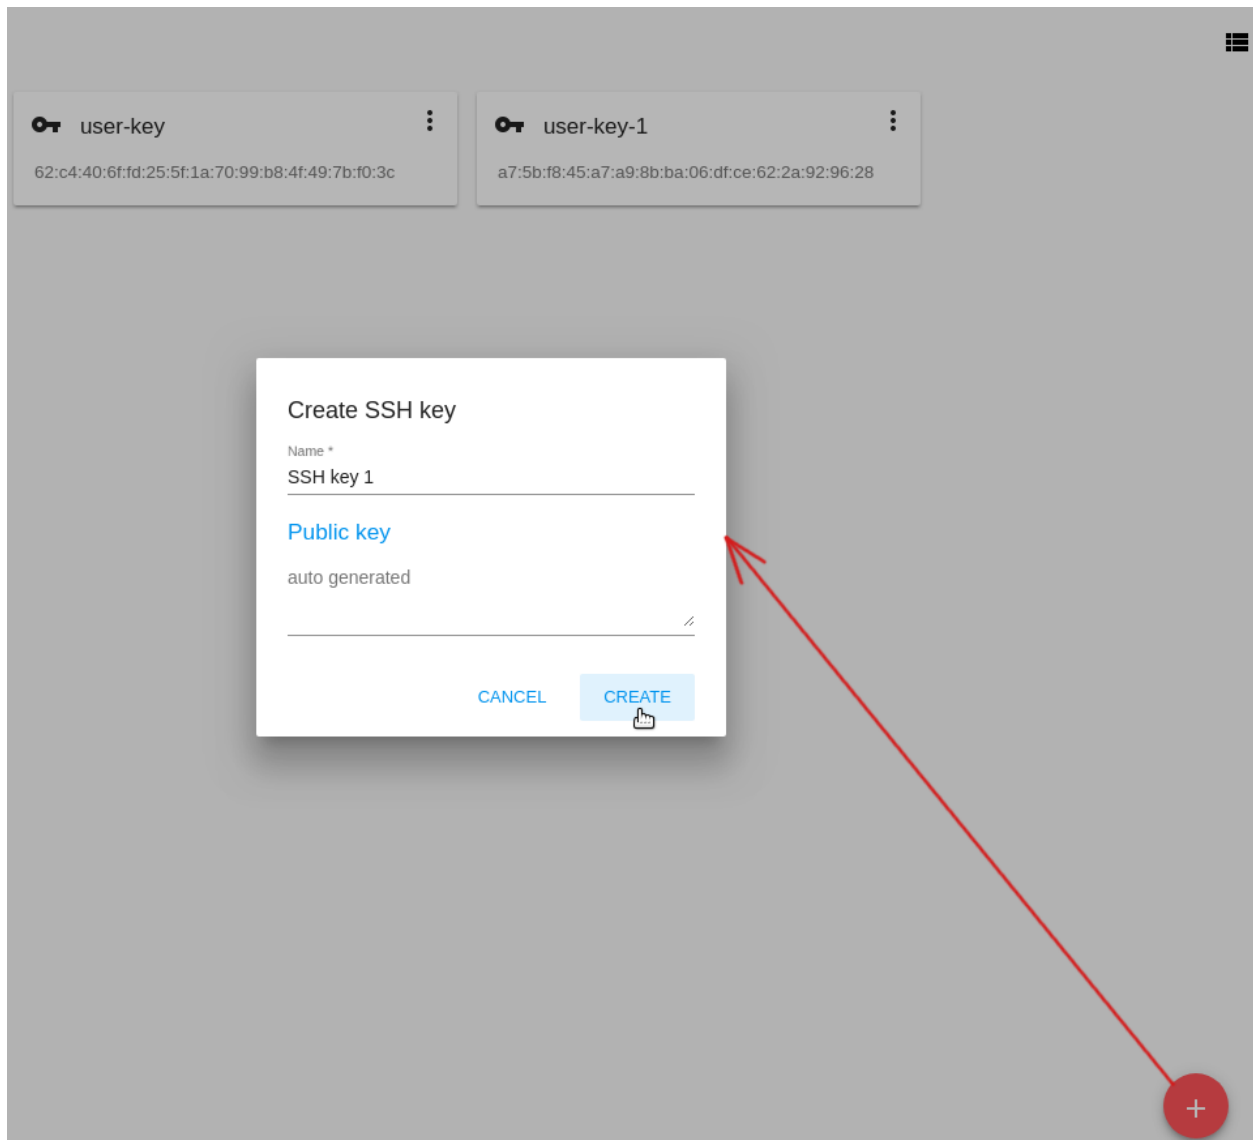

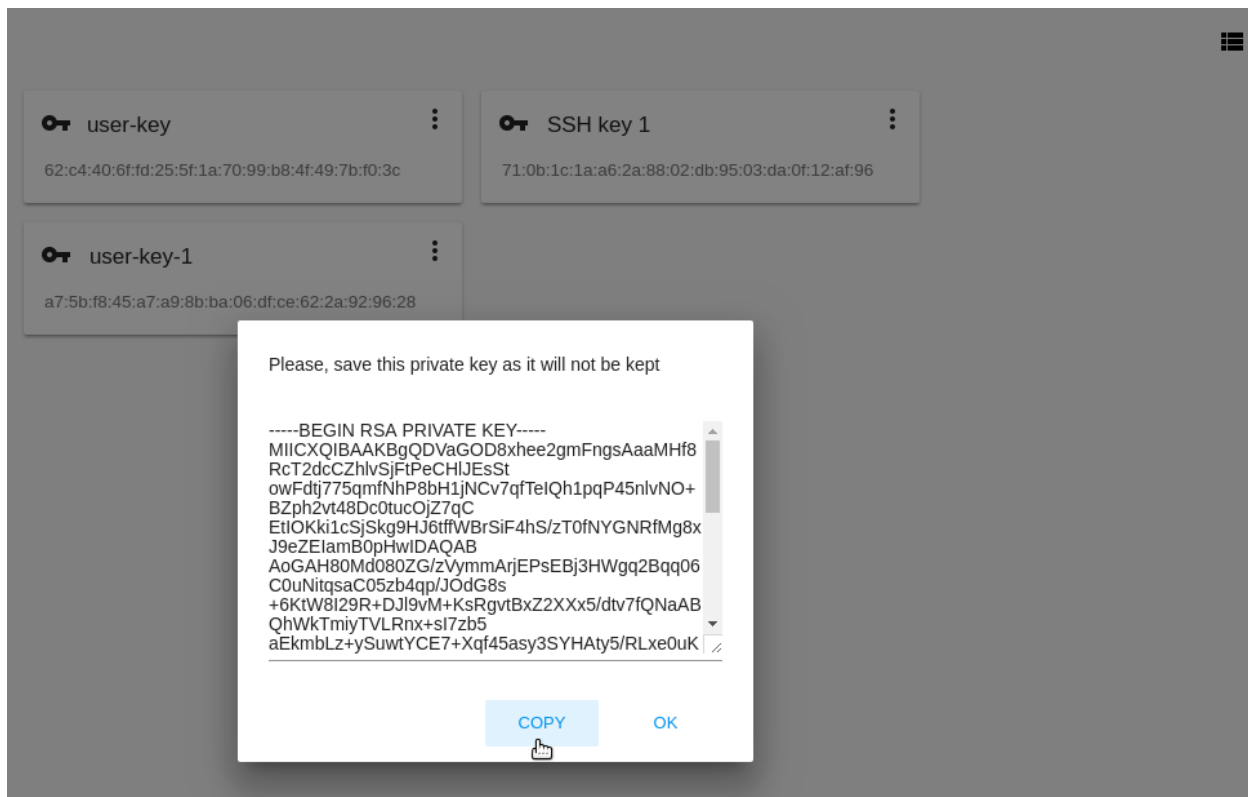


Click “CANCEL” to drop adding a description.

You can edit the description of an SSH key by clicking . Change the existing description in the text field and save the edits.

The description is saved to account tags if they are supported for the account. Account tags can be switched on in the [configuration file](#) by an Administrator.

2.8.4 SSH Key Action Box



By clicking “Actions”  you can expand the list of actions for those SSH keys that belong to your user only. The deleting action is available here.

Click “Delete” to delete a key and then confirm your action in the dialogue window. The key will be deleted. Click “Cancel” to close the window without deleting a key.

2.9 Accounts

Contents

- *Accounts*
 - *Account List*
 - * *Filtering of Accounts*

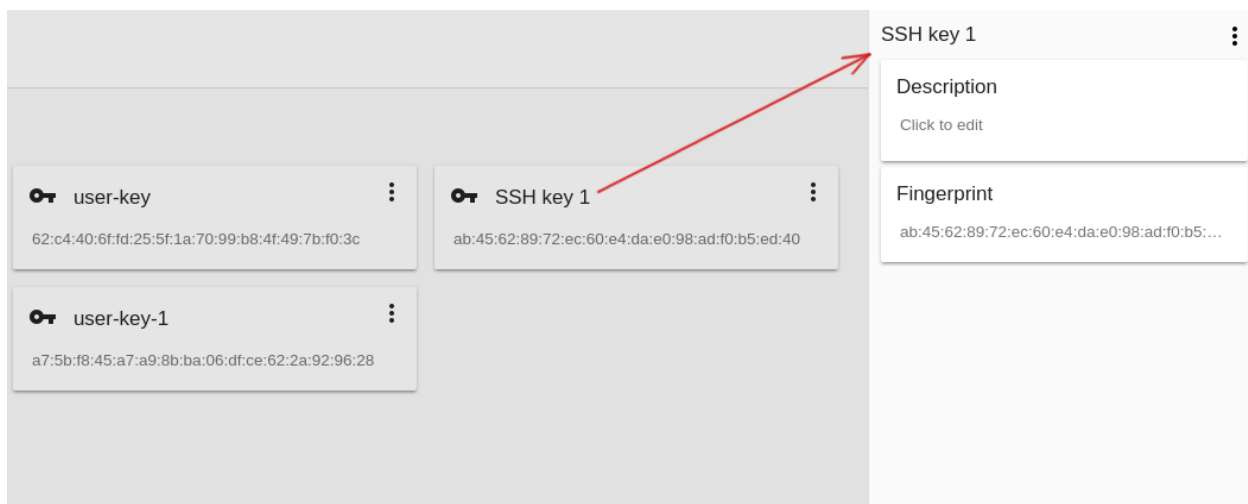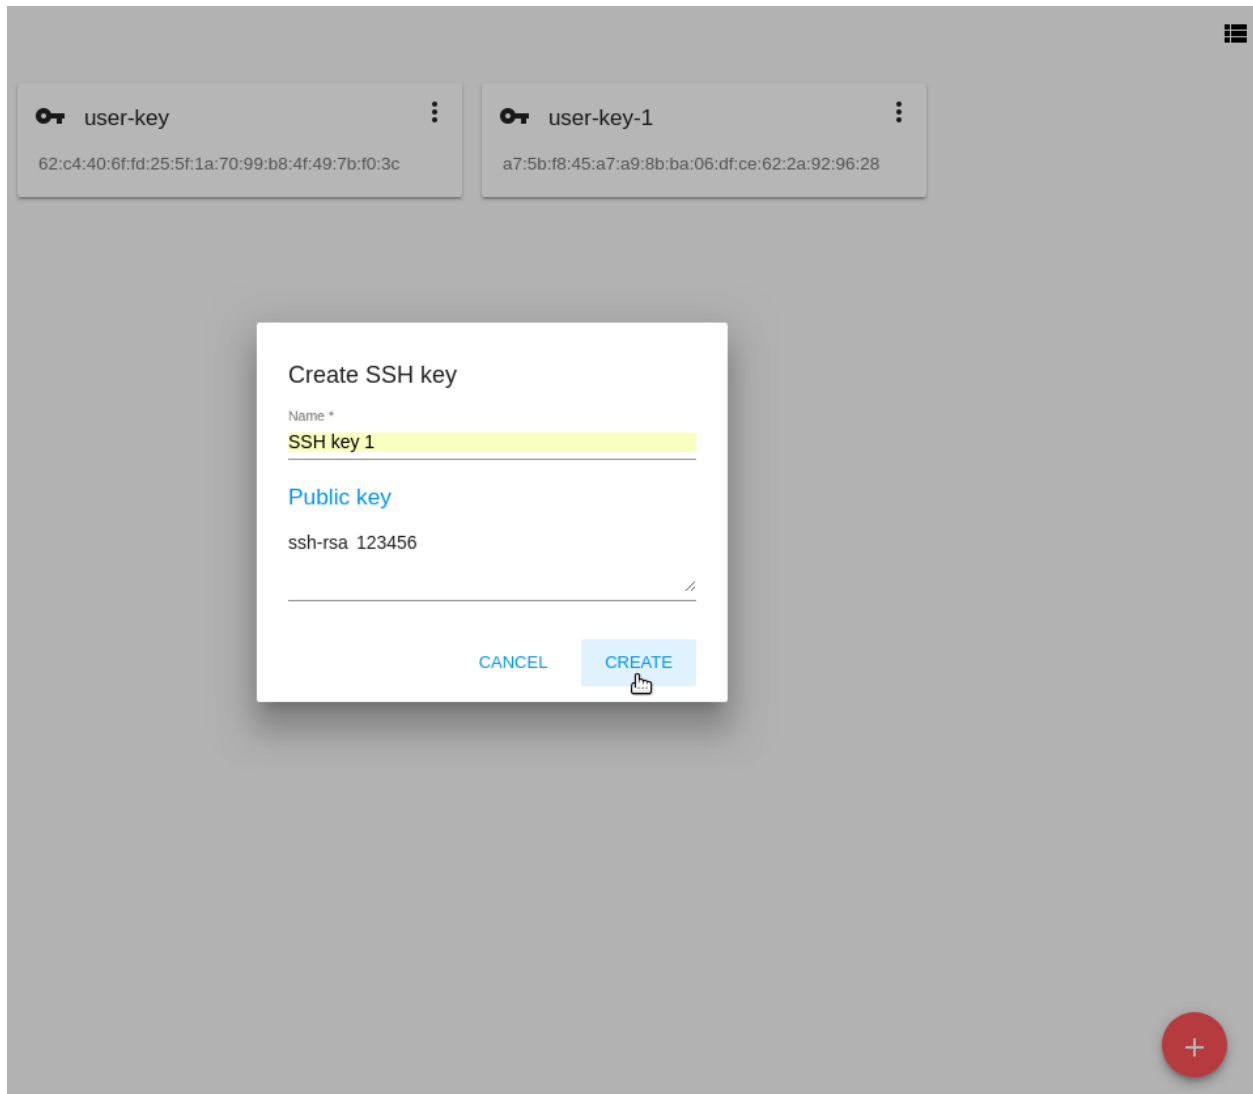

SSH key 1

Description
Enter text
Description for SSH key 1

CANCEL
SAVE

Fingerprint
ab:45:62:89:72:ec:60:e4:da:e0:98:ad:f0:b5:...

key
62:c4:40:6f:fd:25:5f:1a:70:99:b8:4f:49:7b:f0:3c

SSH key 1
71:0b:1c:1a:a6:2a:88:02:db:95:03:da:0f:12:af:9

Delete

ser-key-1
45:a7:a9:8b:ba:06:df:ce:62:2a:92:96:28

- *Create an Account*
- *Account Details Sidebar*
 - * *Create a User*
 - * *User Action Box*
- *Account Action Box*


In the *Accounts* section Administrators can manage accounts and users in them. For an account, details and resource limits can be viewed. Please, note that the account limits are shared by all users in the account. If you are facing the problem of the lack of resources, contact your Administrator. Administrators are able to edit the limits of an account. Besides, they can monitor resource usage having access to the resource statistics for each account.

Administrators can see the list of accounts for the whole domain. They can create new users for an account, edit or delete a user.

If you are a User, you can view but not manage your account and users in it. For each user in the account, you can see the settings.

2.9.1 Account List

Clicking *Accounts* in the left-side navigation bar you open the *Accounts* section. It presents the list of accounts. Administrators can see accounts for the whole domain. A user can see his/her account only, that is the account his/her user belongs to.

You can switch the view from list to box using the switch tool  in the upper-right corner.

For each account in the list you can see the following information:

- Account name;
- State - Shows the account state by color spot: green for Enabled, red for Disabled statuses;
- Role - A role assigned to the account - Root Administrator, Resource Administrator, Domain Administrator, User. Find more information on roles in CloudStack in the [official documentation](#).
- Role type - A role type connected to the role.
- Domain - The domain which the account belongs to.
- Action list - Allows an Administrator to manage the account - to disable or delete it. Find more details at [Account Action Box](#).


Filtering of Accounts

If you are an Administrator, filtering and search tools will help you to find an account in the list.

You can filter the list by:

- Domains - Select a domain/domains available to you from the drop-down list.
- Roles - Select a role - Root Administrator, Resource Administrator, Domain Administrator and/or User -from the drop-down list.
- Role types - Select a role type/types from the drop-down list.
- States - Select a state/states - Enabled and/or Disabled - from the drop-down list.

Besides, accounts can be grouped by the parameters mentioned above.

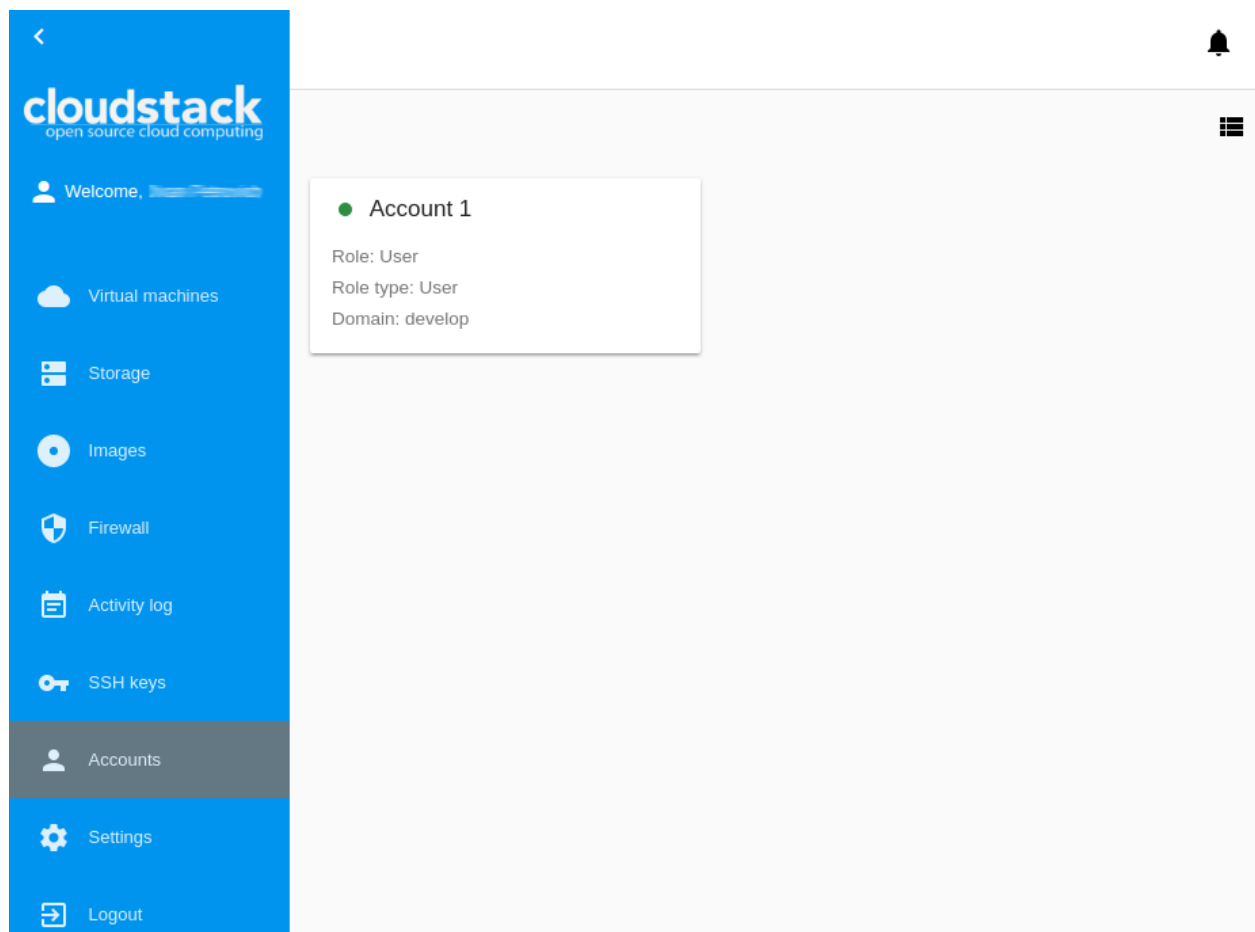

Select domains ▼

Select roles ▼

Select role types ▼

Select states ▼

Group by ▼

● develop

Role: Domain Admin
Role type: DomainAdmin
Domain: develop

● Account 1

Role: User
Role type: User
Domain: develop

● newAccount

Role: User
Role type: User
Domain: develop

● TestAdmin

Role: Domain Admin
Role type: DomainAdmin
Domain: develop

● user

Role: User
Role type: User
Domain: develop

● user123


Role: User
Role type: User
Domain: develop


● user5555

Role: User
Role type: User
Domain: develop



2.9.2 Create an Account

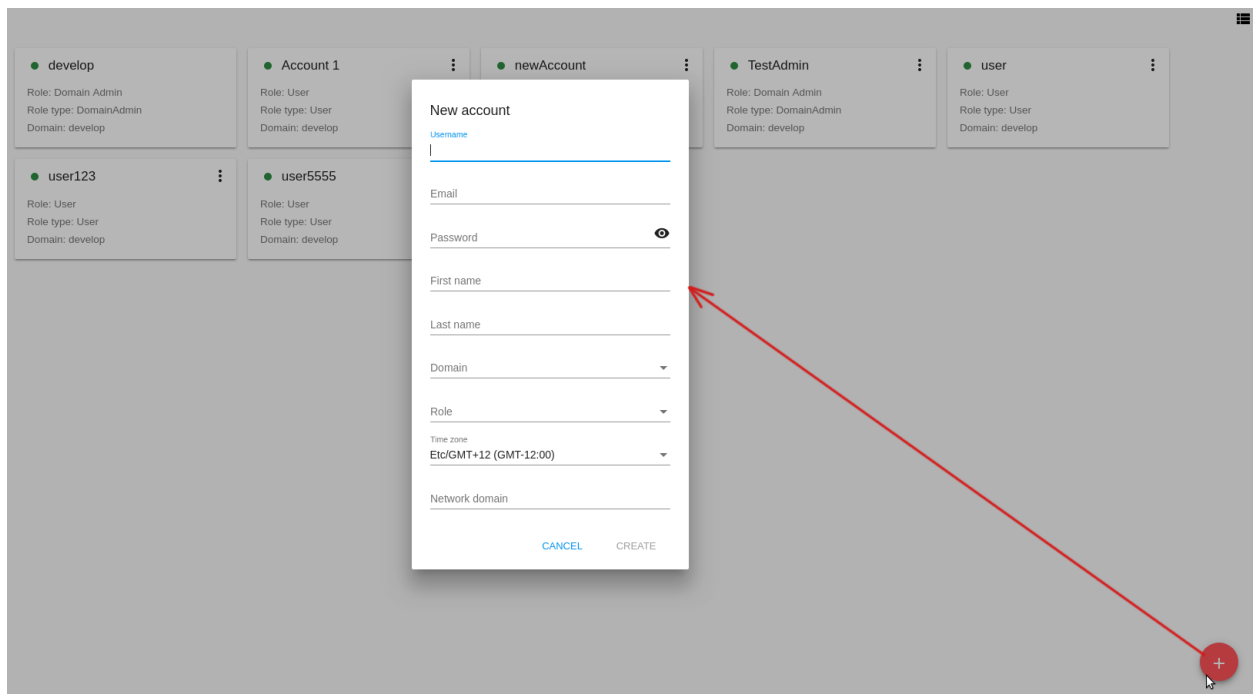An Administrator can create a new account in the domain.




By clicking “Create”  in the bottom-right corner you will open a form where the following fields should be completed:

Note: Required fields are marked with asterisks (*).

- Name * - Enter any desired login ID for the account name. It should be unique within the domain.
- Email * - Enter the accounts email address.
- Password * - Enter any password you like. You can view the password that you are entering by clicking  to the right. Hide the password under dots by clicking .
- First name * - Enter the first name of a person or the first part of the entity represented by the account. It can be a department or a customer.
- Last name * - Enter the last name of a person or the second part of the entity represented by the account (a customer or a department).
- Domain * - Select a domain in which the account is to be created.
- Role - Select the role for the account.
- Time zone - Set the time zone that corresponds to the account locale.
- Network domain - If you want to assign a special domain name to the account’s guest VM network, specify the DNS suffix.

Click “Create” to create the new account. Make sure it has appeared in the list of accounts.

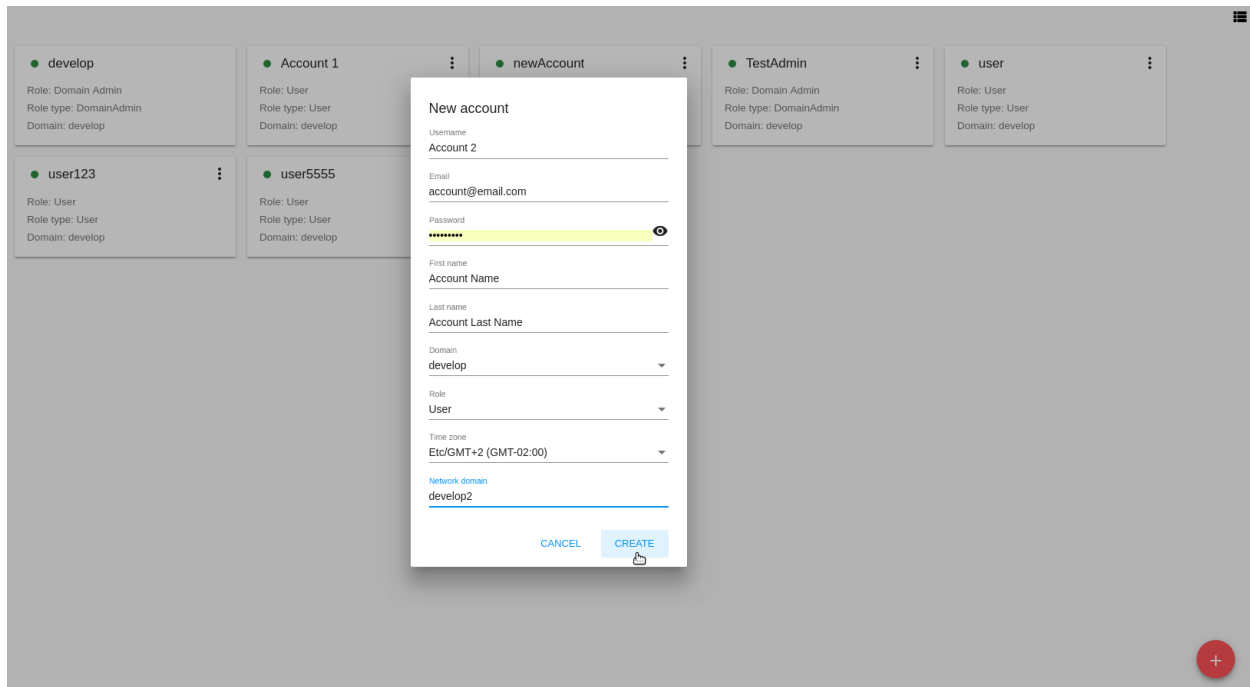


A user is created automatically for the new account. User's name corresponds to the first and the last name specified in the account creation form. This user inherits account's email and time zone.


2.9.3 Account Details Sidebar

For each account, the information is available in the details sidebar to the right. Click the account in the list to open the sidebar:

There are two tabs in the sidebar: General and Users.


The *General* tab contains the general information on the account: details, limits for resources.

Administrators can edit the limits. Click “Edit”  in the Limits block and change the values right in the block.

Administrators can see the statistics on resource usage at the bottom. Refresh the data by clicking .

The *Users* tab contains the list of users in the account. For each user you can expand the information card where the following information is listed:

- Username;
- First and Last name;
- Timezone;
- Email;
- Secret key - The key generated for a user by clicking “Regenerate key” in the Action box. You can copy it to

the buffer by clicking .

● user

Role: User

Role type: User

Domain: develop

user

Details

ID 8f287d55-84fb-4686-aede-55f2030...

Role

User

Role type

User

Domain

develop

VMs

1

IPs

0

Bytes received

Bytes sent

Limits

VM limit

20

IP limit

20

Volume limit

20

Snapshot limit

60

Template limit

20

Project limit

-1

Network limit

32

VPC limit

16

CPU limit

40

Memory limit

8192

Primary storage limit

200

Second storage limit

400


128

Chapter 2. CloudStack-UI User Guide

Limits

VM limit	<input type="text" value="30"/>
IP limit	<input type="text" value="20"/>
Volume limit	<input type="text" value="20"/>
Snapshot limit	<input type="text" value="60"/>
Template limit	<input type="text" value="20"/>
Project limit	<input type="text" value="-1"/>
Network limit	<input type="text" value="32"/>
VPC limit	<input type="text" value="16"/>
CPU limit	<input type="text" value="40"/>
Memory limit	<input type="text" value="8192"/>
Primary storage limit	<input type="text" value="200"/>
Second storage limit	<input type="text" value="400"/>


[CANCEL](#) [SAVE](#)

Statistic		Refresh	
VM count			3
IP count			0
Volume count			5
Snapshot count			12
Template count			18
Project count			0
Network count			0
VPC count			0
CPU count			3
Memory count			2048
Primary storage count		57982058496	
Second storage count		112731157504	

- API key - The key generated for a user by clicking “Regenerate key” in the Action box. You can copy it to the

buffer by clicking




An Administrator has a list of actions available for each user. A user can manage his/her user only. A list of actions is available under the  button. It contains the following actions:

- Change password;
- Regenerate key.



Find more about actions for users in the [User Action Box](#) section.



Create a User

Administrators can create a new user from the *Users* tab of the Account Details sidebar by clicking “Create” .


In the appeared form fill in the following fields:

Note: Required fields are marked with asterisks (*).

- Username * - Enter any desired user ID. It should be unique within the domain.
- Password * - Enter any password you like. You can view the password that you are entering by clicking  to the right. Hide the password under dots by clicking .
- First name * - User’s first name.

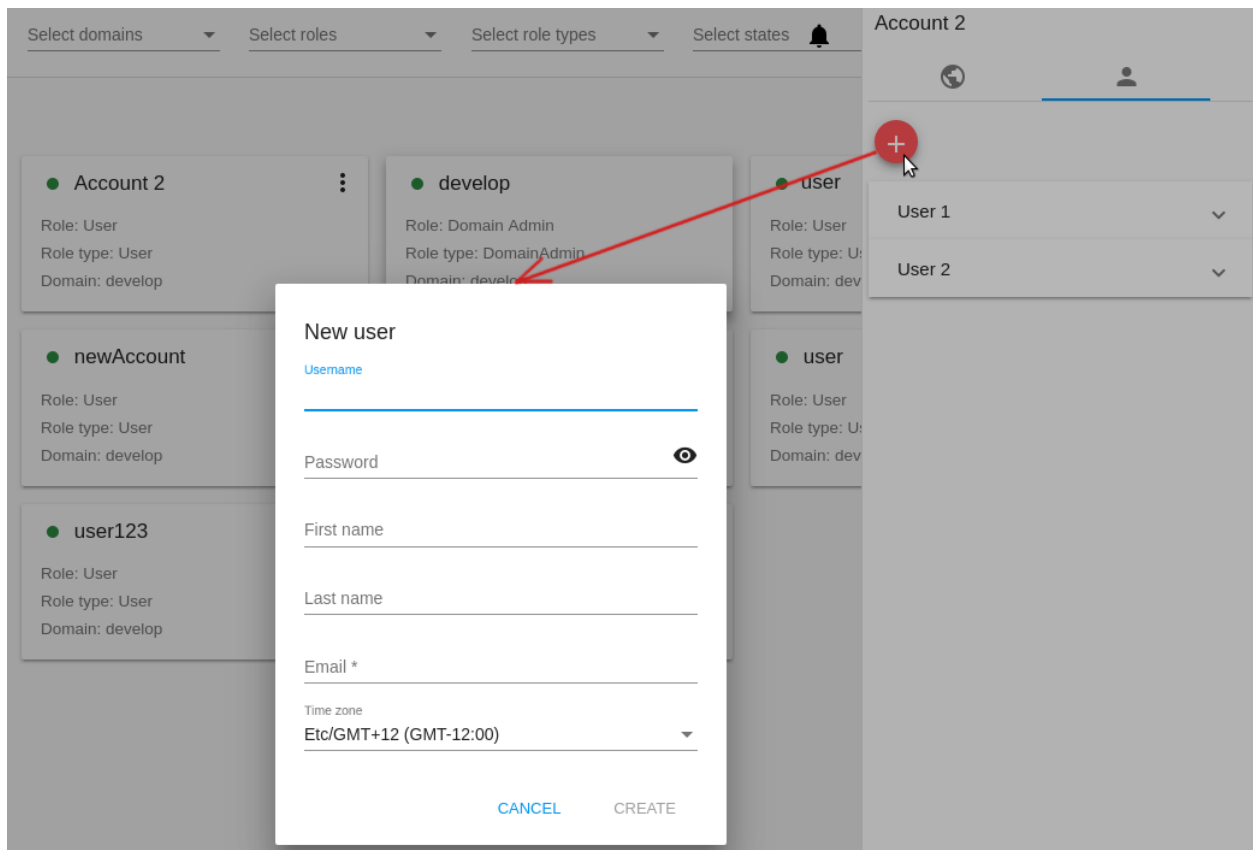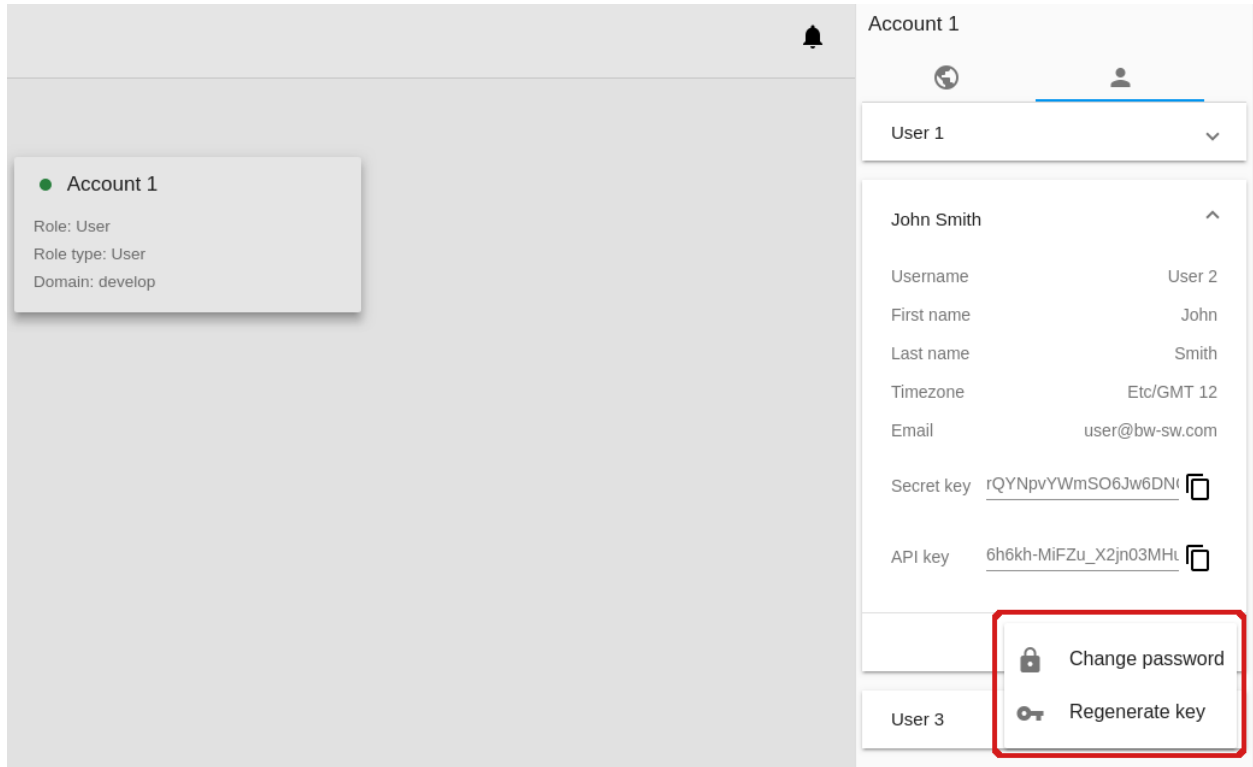

- Last name * - User's last name.
- Email * - Enter the user's email address.
- Time zone * - Set the timezone that corresponds to the user's locale. Select an option from the drop-down list.

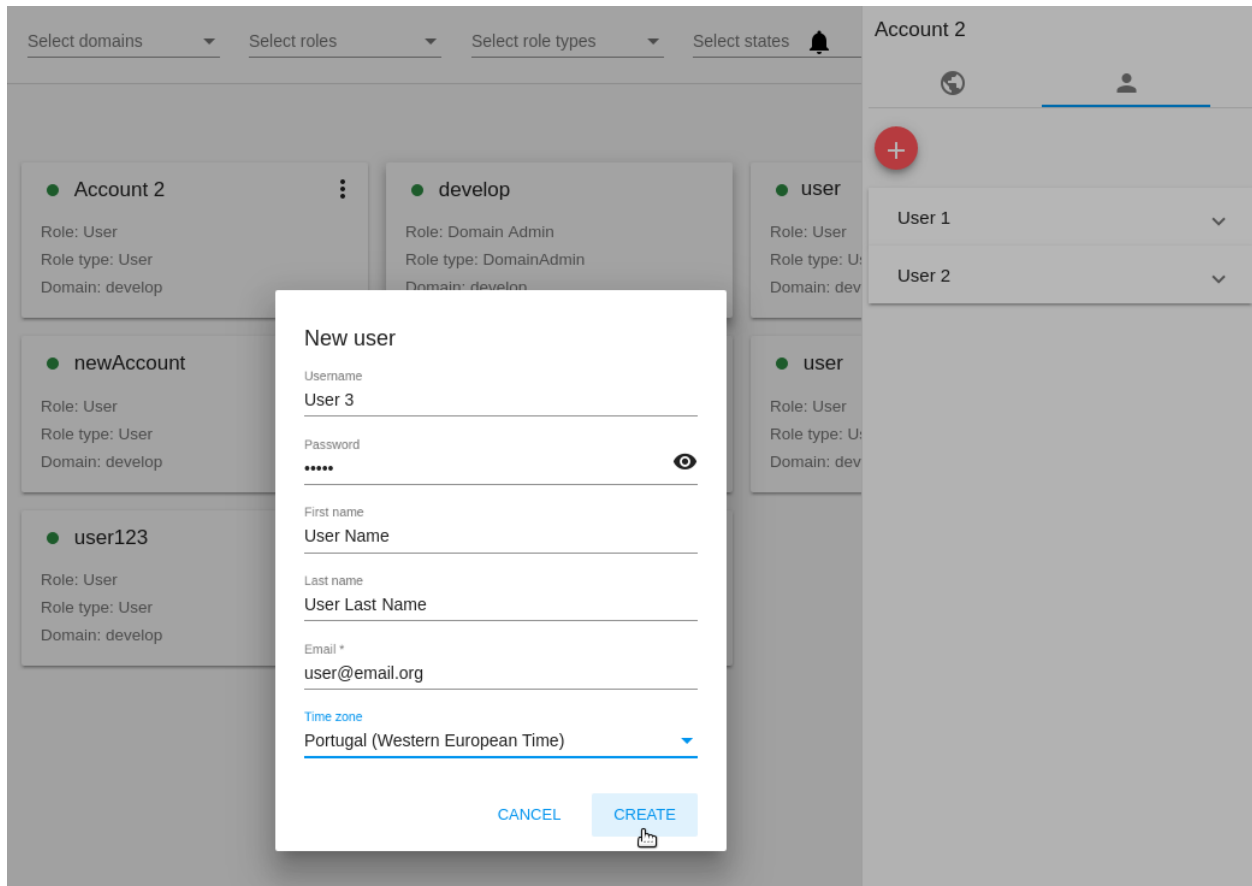


Click “CREATE” to create the new user. It will appear in the list of users for this account.

Click “CANCEL” to cancel the user creation.



User Action Box


Administrators can manage a user via the Action box.


The list of actions allows an Administrator to:

- Edit user - Opens a form to edit user's settings (name, email, timezone). Edit the information and click “SAVE” to save the edits.
- Change password - Opens a modal window with two fields for you to enter a new password and confirm it. Use the view tool  to view or hide a password while entering. Click “SAVE” to save the new password.
- Regenerate key - Allows changing the keys - secret and API - for the user. Confirm your action in the dialogue window, and the keys will be changed.
- Delete a user - Allows deleting a user from the system. Confirm your action in the dialogue window, and the user will be deleted.

develop



User 1 


Username User 1


First name User

Last name 1

Timezone Etc/GMT 12


Email user1@email.com


Secret key EnSrES7RBZl4PuxhRS7r 


API key yf9fFLIYSWYBG2MYB_B 


User 2


User 3


 Edit user

 Change password


 Regenerate key


 Delete user

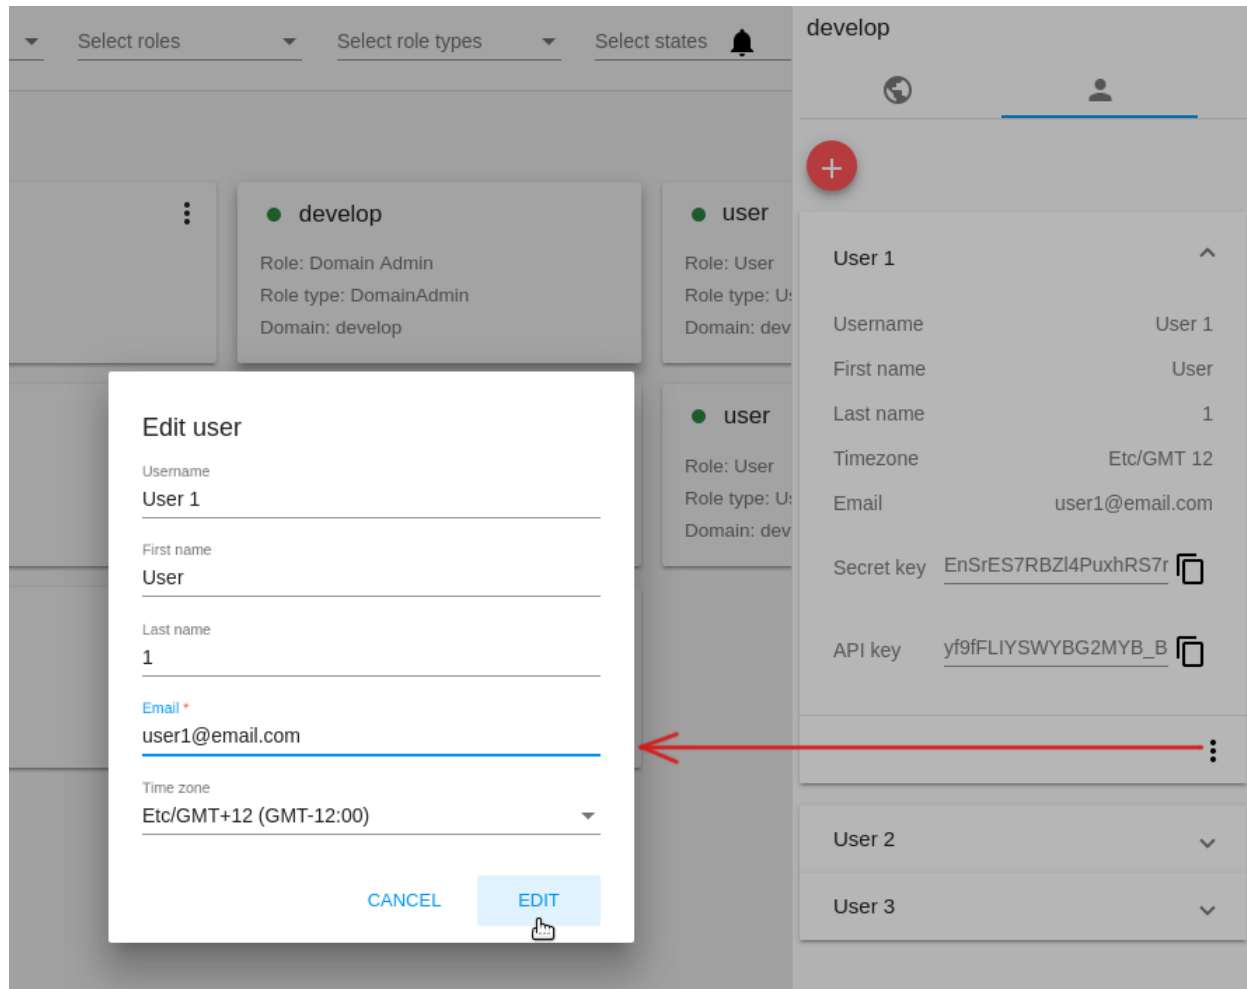

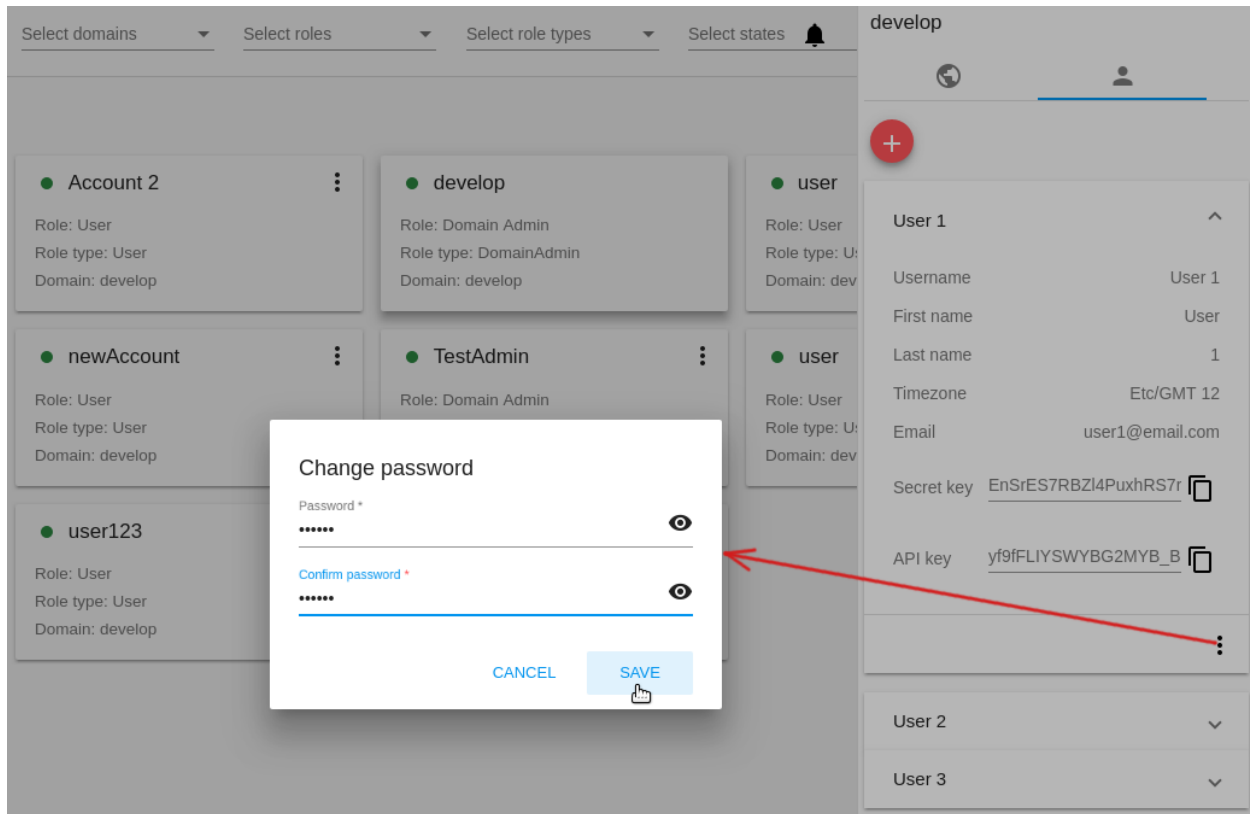

2.9.4 Account Action Box

Administrators can manage an account via the Action box under .

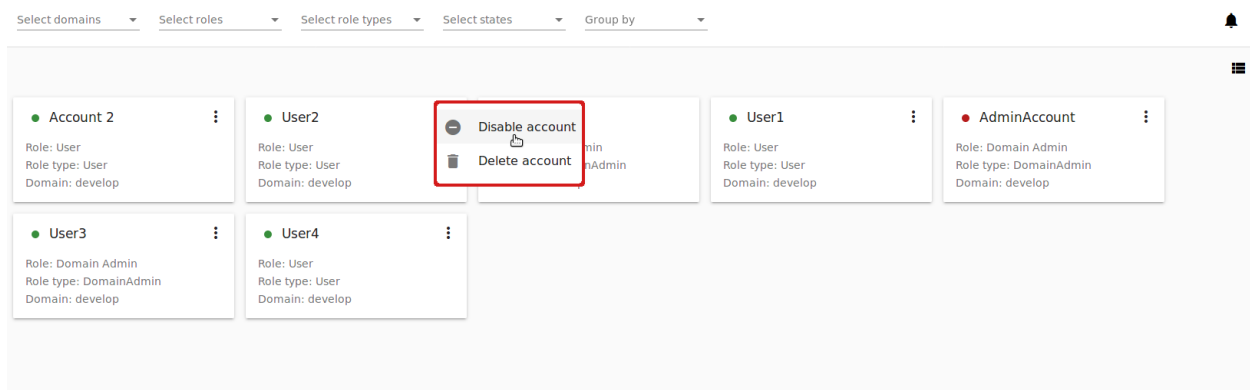

The list of actions allows an Administrator to:

- **Disable account** - Allows disabling an account. By disabling the account all users for this account will no longer have access to their cloud resources. All running VMs will be immediately shut down. Click “Disable account” and confirm your action in the dialogue window. The account will be inactive.
- **Enable account** - Allows activating a disabled account. Click “Enable account” and confirm your action in the dialogue window. The account will be activated.
- **Delete account** - Allows deleting an account from the system. Confirm your action in the dialogue window, and

the account will be deleted.

2.10 Settings

Contents

- *Settings*
 - *Security*
 - * *Change Password*
 - * *Session Timeout*
 - * *Save VM passwords by default*
 - *API Configuration*
 - *Look and Feel*
 - * *Interface Language*
 - * *First Day of Week*
 - * *Time Format*
 - * *Theme Color*

In the *Settings* section a user can modify the interface by changing settings.

2.10.1 Security

A user can manage the following security settings:

- Change password;
- Set the session timeout interval;
- the “Save VM passwords by default” option.

Change Password

Here you can change the password provided by your Administrator to the one you like. This will improve the account security.

Enter a new password and re-enter it in the next field to confirm it:


Click “UPDATE” to save the new password.


In case you have lost or forgotten your password, contact your Administrator.


Session Timeout


Here you can specify the maximum amount of time that an active session can be idle (without user activity) before it automatically closes. The default interval is 30 minutes.


<



open source cloud computing


Welcome, 


 Virtual machines


 Storage


 Images


 Firewall


 Activity log

 SSH keys

 Accounts

 Settings

 Logout



Security

Change password

New password *

Repeat password *


UPDATE

Session timeout (in minutes)


30

UPDATE


☐ Save VM passwords by default

API configuration 

API Key

6h6kh-MiFZu_X2jn03MHuVcgmbDL 

Secret key


rQYNpvYWmSO6Jw6DNGDmS6YW 

Connection URL

<http://cs-ui-ci.z1.netpoint-dc.com:8...>

Documentation

<https://cloudstack.apache.org/api/...>

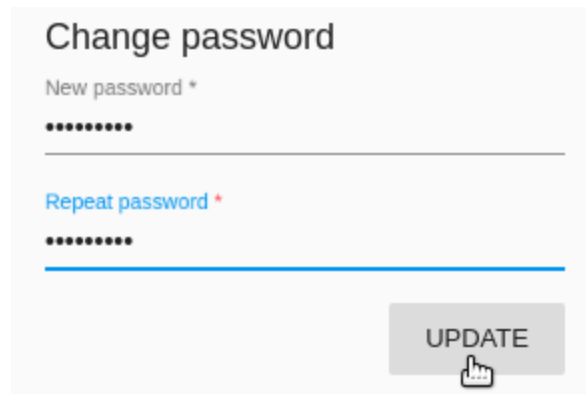

Change password

New password *


.....

Repeat password *


.....

UPDATE

Set the desired time limit in minutes using the switch button  to the right or typing it just into the field. Then click “UPDATE” to save the changes.

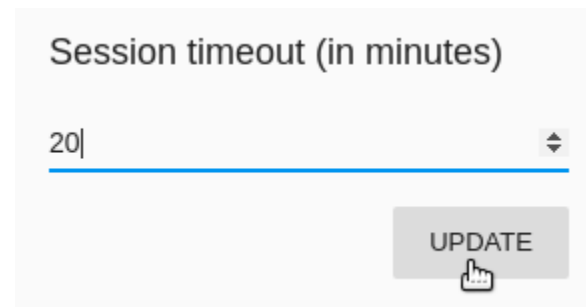

Session timeout (in minutes)

20| 

UPDATE

The value is stored in user’s tags.

The maximum allowed value is 300 minutes. Please, note that a long time period of an idle session decreases the account security.

The session timeout can be set in the configuration file. You will find more information in the [configuration guide](#).

Save VM passwords by default

This checkbox allows saving passwords to VM tags automatically for all created virtual machines requiring passwords.



Tick this option here. The passwords will be saved to VM tags right at the moment VMs are created. You will see a password (if it is required for the VM) is marked as saved in a dialogue window after the new VM is deployed:


If this option is not activated, every time when creating a machine the system will ask you to save the password by clicking “SAVE” next to it:


Then the system will ask you if you wish to save passwords to VM tags automatically. If you click “Yes”, the “Save VM passwords by default” option will be activated in *Settings*. You will find more information about VM creation in the [Create a Virtual Machine](#) section.

2.10.2 API Configuration


In this block of settings you can see and manage the API configurations: regenerate API keys, see the connection URL.

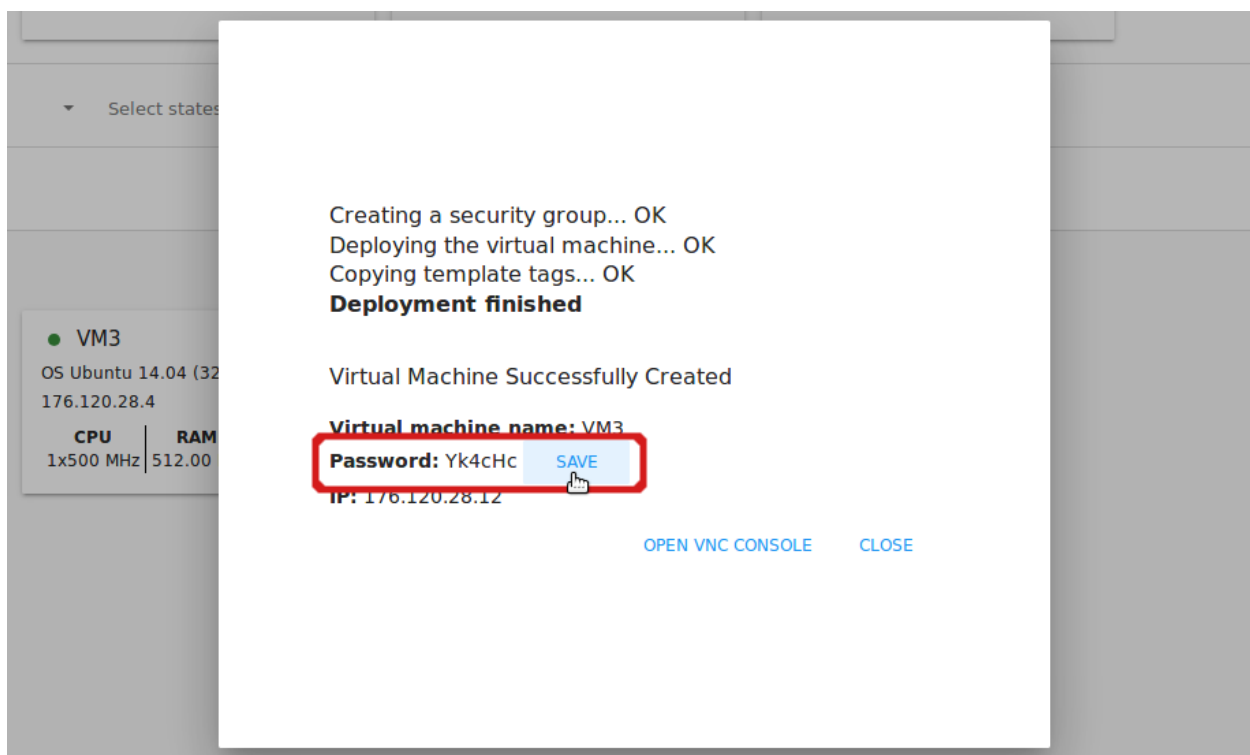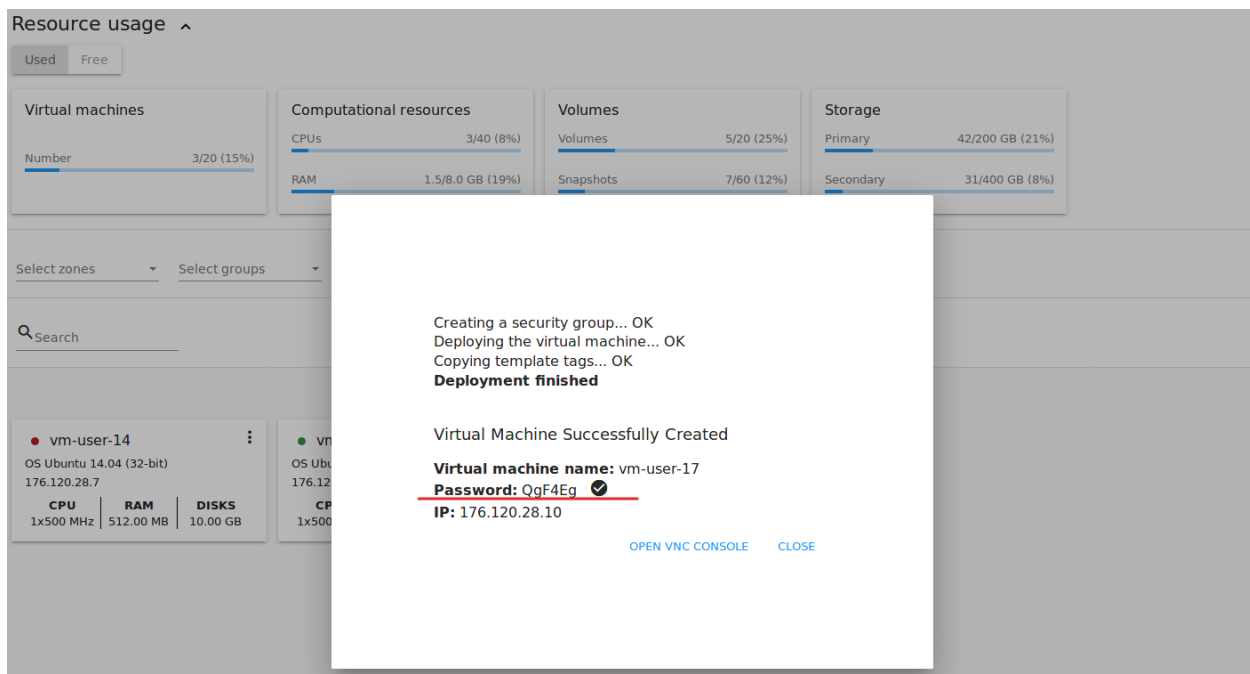


You can see an API key and a Secret key in corresponding fields. You can copy any of them clicking  to the right.

API configuration 

API Key

6h6kh-MiFZu_X2jn03MHuVcgmbDL\ 

Secret key


rQYNpvYWmSO6Jw6DNGDmS6YW 

Connection URL

<http://cs-ui-ci.z1.netpoint-dc.com:8...>

Documentation

<https://cloudstack.apache.org/api/...>

Regenerate the keys by clicking  above the fields. New keys will be generated.

Below you can view a connection URL which is used to send requests to CloudStack API. All requests are listed in the Apache CloudStack documentation available by the link.

2.10.3 Look and Feel

In this block you can adjust the interface look.

Interface Language

Select the language of your interface. Currently two options are available in the drop-down list: Russian and English.

First Day of Week

In this block, you have the opportunity to choose between two types of weeks: Sunday - Saturday or Monday - Sunday. From the drop-down list select the day when a week starts: Monday or Sunday.

API configuration



API Key

6h6kh-MiFZu_X2jn03MHuVcgmbDL\

Secret key

rQYNpvYWmSO6Jw6DNGDmS6YW

Connection URL

<http://cs-ui-ci.z1.netpoint-dc.com:8...>

Documentation

<https://cloudstack.apache.org/api/...>

API configuration



API Key

6h6kh-MiFZu_X2jn03MHuVcgmbDL\

Secret key


rQYNpvYWmSO6Jw6DNGDmS6YW

Connection URL

<http://cs-ui-ci.z1.netpoint-dc.com:8...>

Documentation

<https://cloudstack.apache.org/api/...>

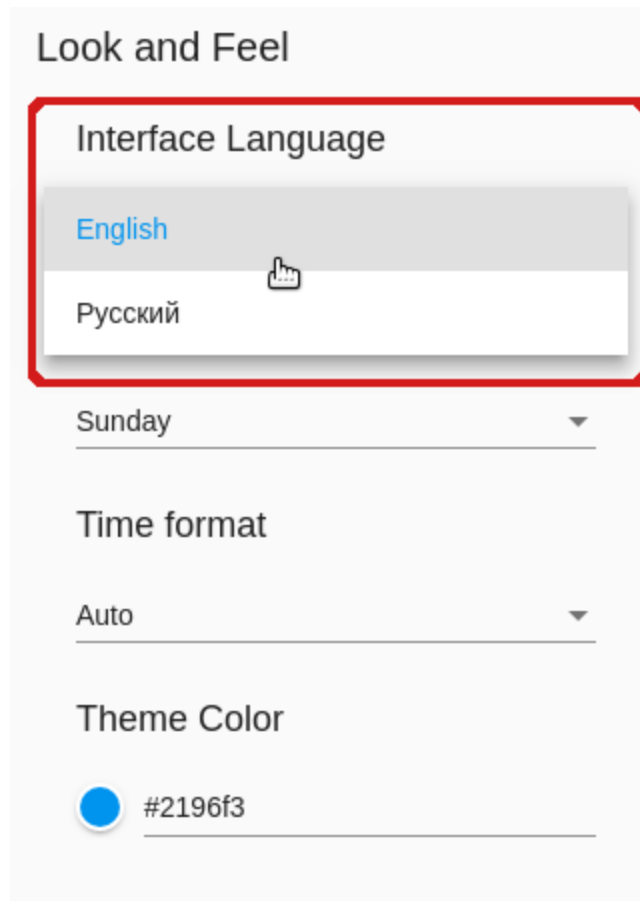

Look and Feel

Interface Language

English ▼


First day of the week


Sunday

Monday

Auto ▼


Theme Color

 #2196f3

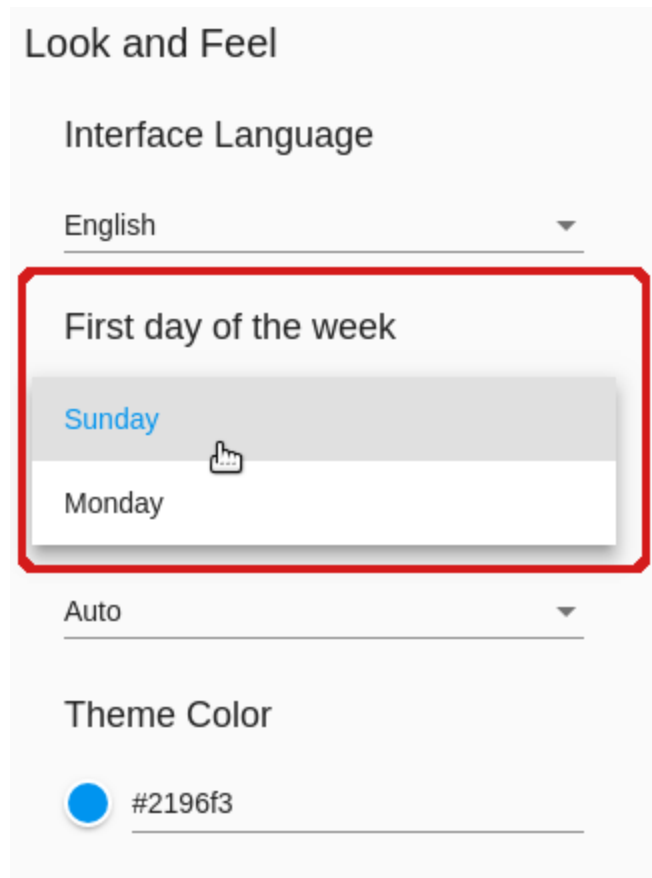

Time Format

Here you have the opportunity to switch the time format from AM/PM to 24H. You can set it to “Auto” and the time format will be set in correspondence to the interface language: AM/PM if you select English and 24H if you select Russian.

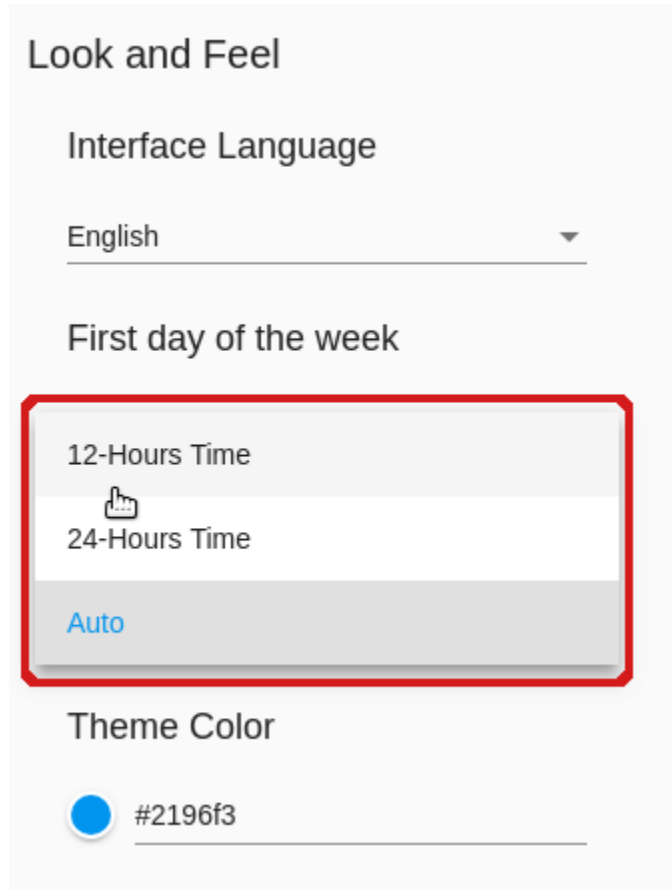

Look and Feel

Interface Language

English

First day of the week

12-Hours Time

24-Hours Time

Auto

Theme Color

#2196f3

Theme Color

Select a preferred theme color. Currently two options are available: “blue-red” and “indigo-pink”. The blue-red one is used by default.

Click the field and select another color if you wish.

A theme color can be set in the configuration JSON file. You will find more information in the [configuration guide](#).

2.11 Logout

Clicking *Logout* in the bottom of the navigation menu bar a user can logout from CloudStack.

It will move a user back to the Login form.


Look and Feel

Interface Language

English ▼

First day of the week

Sunday ▼

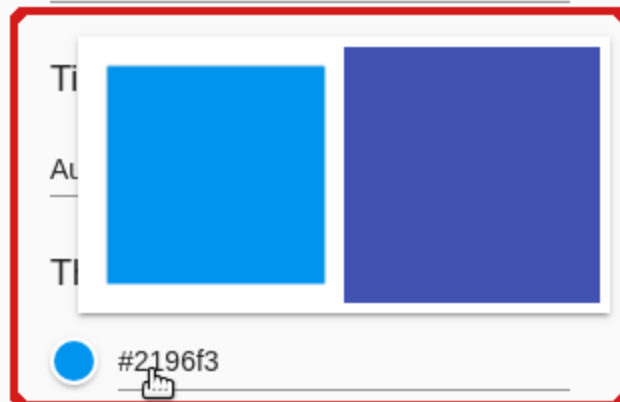

cloudstack
open source cloud computing

Welcome,

Virtual machines

Storage

Images

Firewall

Activity log

SSH keys

Accounts

Settings

Logout

Resource usage ^

Used Free

Virtual machines

Number 1/20 (5%)

Computational resources

CPU 1/40 (3%)

RAM 0.5/8.0 GB (6%)

Volumes

Volumes 2/20 (10%)

Snapshots 2/60 (3%)

Storage

Primary 20/200 GB (10%)

Secondary 116/400 GB (29%)

Select zones Select groups Select states Group by

Search

VM	OS	IP	CPU	RAM	DISKS
vm-user-2	OS Ubuntu 14.04 (32-bit)	176.120.28.3	1x500 MHz	512.00 MB	10.00 GB

CHAPTER 3

Indices and tables

- `genindex`
- `modindex`
- `search`